

A Quad Element Textile Material Based Printed MIMO Antenna for Wearable Application

Kumar, Sanjeev

Department of Electronics & Communication Engg., Aditya University

K. V. S. Ramachandra Murthy

Department of Electrical & Electronics Engg., Aditya University

<https://doi.org/10.5109/7183434>

出版情報 : Evergreen. 11 (2), pp.1268-1272, 2024-06. 九州大学グリーンテクノロジー研究教育センター

バージョン :

権利関係 : Creative Commons Attribution 4.0 International

A Quad Element Textile Material Based Printed MIMO Antenna for Wearable Application

Sanjeev Kumar^{1*}, K. V. S. Ramachandra Murthy²

¹Department of Electronics & Communication Engg., Aditya University, Surampalem, India

²Department of Electrical & Electronics Engg., Aditya University, Surampalem, India

E-mail: sanjeevjuet@gmail.com, sanjeev.kumar@adityauniversity.in

(Received September 14, 2022; Revised April 8, 2024; Accepted June 14, 2024).

Abstract: In this manuscript, 4-port textile material-based peddle-shaped MIMO antenna is introduced. The presented antenna is electrically small ($58 \text{ mm} \times 79 \text{ mm}$), made on textile/felt material of dielectric value is 1.34 and a thickness of 1 mm. To minimize mutual coupling among the elements, a combination of H-and Π -formed design is implanted in the ground layer to decrease the surface current among the elements. The total dimension of the 4-elements MIMO design is only $58 \times 79 \times 1 \text{ mm}^3$. The advantages of the designed MIMO antenna can be observed in the term of simple in structure for isolation improvement as well as simple in geometry. Using these contemplations, a compact textile-based 4-elements MIMO antenna is planned and analyzed to work in the range of from 2.34 GHz to 6 GHz application. The isolation among the ports is below than -20 dB across the entire frequency range and also MIMO performances are analyzed and studied. Experimental authentication of the proposed structure MIMO is also provided and it can be used in wideband application.

Keywords: multi-in multi-out (MIMO); ECC; TARC; isolation; wearable

1. Introduction

The quick improvement of portable innovation toward the 5G-innovation requests wideband, ultrawideband (UWB) and multiband application-based antenna apparatuses are generally helpful to serve remote updates and to diminish the structure by and large device size, intricacy, and assembling costs. The wideband based antennas have pulled in research towards as a result of various highlights, for example, high information rate, low force prerequisite, numerous channel network at an at once as capacity to serve great pictures¹⁻⁷. Wideband antenna can be utilized in business applications and for this application, begun analyst toward development of UWB based reception apparatuses for wideband applications, for example, wearable gadgets, IoT and intellectual radio⁸⁻¹¹. At long last, a solitary wideband radio antenna has its particular constraints in dealing with multi-channel correspondence for a wide range application¹²⁻¹⁶. In¹⁷⁻¹⁸, Wearable antennas are now used for researching medical problems, sports, military applications, etc. It attracts the attention of researchers around the world for such interesting applications. Printed antennas are a critical component. In¹⁹⁻²³, a number of publications discuss distinct wearable MIMO antennas that are designed for use in MIMO and wireless applications, with the goal of reducing element-to-element coupling. A wearable device with a dual-


polarized design has been introduced. The existing manuscript is used subsurface radiation exhibiting polarisation diversity activity. It covers isolation is above 17 dB and an S_{11} B.W. of 144 MHz. Despite the fact that previous research has focused on MIMO antennas with linear polarisation properties for use in wearable devices,¹⁹. In²², a MIMO designed structure with dual-band capabilities is described. Circular-shaped high-impedance surface supported MIMO antenna has been presented in²³. Many MIMO antennas with low mutual coupling have been designed and presented for wireless applications in various current literatures. While, no one wearable 4-element textile material-based MIMO antenna is presented for wireless application. So, MIMO antenna structure that gives wide working range, high gain and secure RD as well as high data rate. A 4-element textile material-based antenna is developed and analyzed.

In this work, a peddle-shaped MIMO antenna based of microstrip-fed single-layer compact textile material is introduced. The intended design shows the isolation among the port element is less than -20 dB and operating band is ranging from 2.4 GHz to 5.8 GHz. The exceptional feature of this presented design is that the simple structure is used for reducing the mutual coupling. In addition, ECC and TARC are measured and it compare with simulated outcomes.


2. Antenna concept and design

2.1 4-Element MIMO antenna geometry

The design parameters are as given: $L_g = 79$ mm, $W_g = 58$ mm, $W_1 = 57.5$ mm, $W_2 = 10.25$ mm, $d_1 = 19$ mm, $W_3 = 2.5$ mm, $W_4 = 4.3$ mm, $W_5 = 2.55$ mm, $W_6 = 12$ mm, $W_7 = 2.3$ mm, $l_1 = 2.5$ mm, $l_2 = 21.5$ mm, $l_3 = 14$ mm, $l_4 = 4$ mm, $l_5 = 6.25$ mm, $l_7 = 14.2$ mm and $R_1 = 11.5$ mm. Structure of the designed textile based 4-element MIMO antenna is shown in Fig. 1.

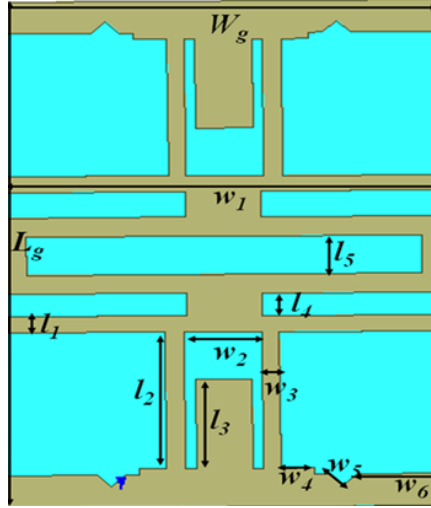

(a)

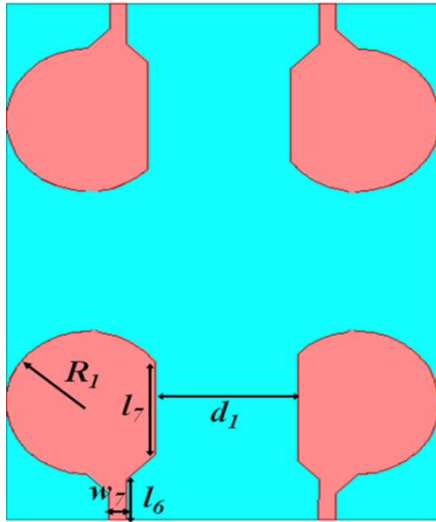

(b)

Fig. 1: 4-element proposed textile MIMO antenna (a) back portion (b) front portion.

2.2 MIMO antenna design and configuration

Textile MIMO antennas for wearable applications are described in detail in this segment. A combination of triangular with semi-circle shape and two compact monopole radiator and to build a MIMO combination, 22×22 mm² squares are arranged in the opposite position and run through the CST software for simulation.. The complete dimension of the planned antenna is only

$79 \times 58 \times 1$ mm³ and a textile substrate of 1 mm thickness is used. The substrate possesses a loss tangent of 0.002 and a dielectric constant of 1.34. In the first step, two identical peddles-shaped monopole type antenna is using 50-ohm microstrip lines, all antennas are fed from a common ground plane and positioned in mirror configurations. Mutual coupling occurs between antennas printed on the same substrate due to surface wave coupling and current flowing on the shared ground plane, Poor impedance bandwidth and isolation between radiators result as a result of this. In this proposed design, a combination of H- and Π -shaped strip are introduced in such a technique that the isolation between port elements of designed MIMO geometry is improved strangely. Fig. 1(a) shows the insulating structure, which is completed of an H-and Π -geometry with couple triangular structure placed into the bottom layer; Fig. 2 shows the outcomes of these slots. Nonetheless, there is still a connection between the four components' bases. This improves the MIMO antenna's suitability for use in handheld electronics. The geometric distortion in the ground plane, which is formed like an H, Π , and triangle, functions as a stop-band filter. To suggest an arrangement among the antenna parts that improves isolation, these methods employ the overall shape of these triangular faulty ground structures.

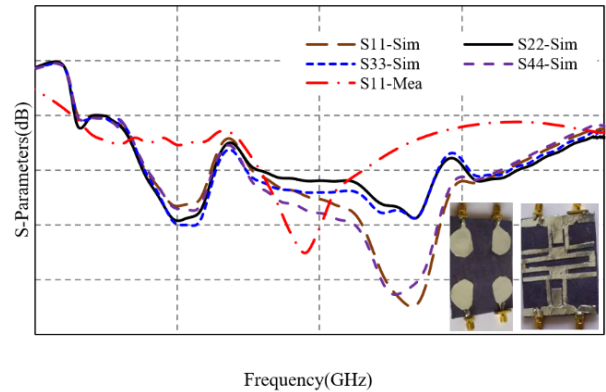


Fig. 2: Simulated and measured S-values.

3. Results discussion and analysis

3.1 S-Parameters

To verify accuracy of the peddles-shaped textile-based MIMO antenna simulation outcomes, the antenna is fabricated and tested. The computed and verified S-characteristics exhibit good accuracy as shown in Fig. 2. The measured BW for the intended antenna is 3.6 GHz (from 2.3 GHz to 5.9 GHz) and the isolation among the port 1, port 2, port 3 and port 4 is 20 dB higher in most frequency bands as shown in Fig. 3. The small variation between measured and simulation result is due to manufacture and welding tolerances, lead damage, and SMA connector things.

3.2 Radiation performance

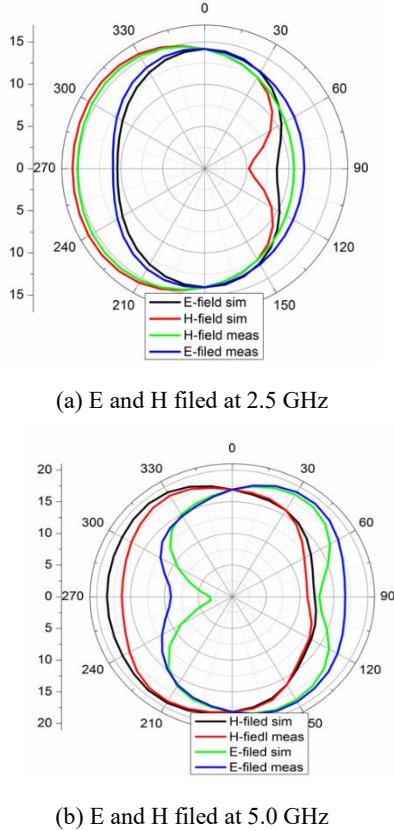


Fig. 3: Measured and simulated radiation fields.

In this part, we'll look at how well the radiation performance of designed 4-element peddle-shaped textile antenna is analyzed. Figure 4 illustrates the gain radiation shape at 2.5 GHz and 5.0 GHz. Simulated and measured values are approximately identical. The measured and simulated graphs towards the broadside are excited by Port 1 and remaining ports are matched with 50 ohms. When Port 1 is enabled, all other terminals are connected with a value of 50-Ω and operate in a manner consistent with good value. In the same way, if Port 2 is enabled and all other ports are matched with 50-Ω.

3.3 MIMO parameter analysis

To endorse the diversity analysis of the presented peddle-shaped MIMO design and this requires analyzing different It is crucial to use MIMO performance metrics like ECC and TARC and it should be $ECC < 0.5$, $TARC < 0$ dB^{24, 25}.

3.3.1 ECC

In MIMO structure, ECC is a key parameter that explains how one antenna is separated from one another. If one antenna's element is horizontally polarized, the other must be vertically polarized. In this situation, ECC is zero between them. Thus, in an ideal scenario, ECC would be zero, but in a real setting, an acceptable number for an uncorrelated condition is less than 0.5²⁴, which

means that the antenna elements can be more diverse. The following relation has been used to compute the ECC in equation (1)²⁴.

$$\rho_a = |\rho_{mn}|^2 = \frac{|S_{mm}^* S_{mn} + S_{nm}^* S_{nn}|}{(1 - |S_{mm}|^2 - |S_{mn}|^2)(1 - |S_{nn}|^2 - |S_{mn}|^2)} \rho_{rad,m} \rho_{rad,n} \quad (1)$$

where, $\rho_{rad,m}$ and $\rho_{rad,n}$ are the radiation efficiency of m^{th} and n^{th} antenna element respectively.

The planned MIMO design has an ECC of less than 0.02 and Fig. 5 shows a comparison of the ECC that has been measured and that has been simulated.

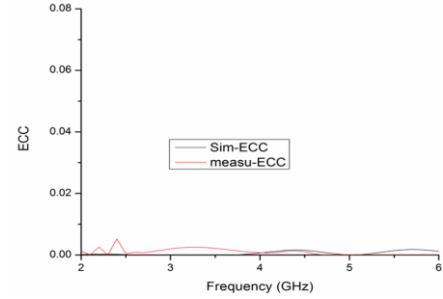


Fig. 4: Experimental and computational estimates of ECC.

3.3.2 TRAC

In a multi-port antenna system, when a MIMO system's antennas work concurrently. In this case between antenna element affects one another and the complete analysis of the MIMO system will influence in relations of impedance BW, isolation, and efficiency. As a result, relying solely on the S-parameter values will not be sufficient to reveal the MIMO system's true performance. Therefore, a TARC is investigated and described as the “square root of the ratio of total incident and reflected power” of the overall MIMO antenna system²⁵. To determine the TARC for the designed antenna system, use the following equation (2)

$$\Gamma_a^T = \sqrt{\sum_{i=1}^N |b_i|^2 / \sum_{i=1}^N |a_i|^2} \quad (2)$$

where the “incident” and “reflected” signals from each port are denoted by a_i and b_i , respectively. Figure 6 shows TARC is lower than -10 dB in both modelling and measurement results. Figure 7 illustrates the proposed antenna's simulated and practical peak gain, which is 2.9 dB at 5.4 GHz.

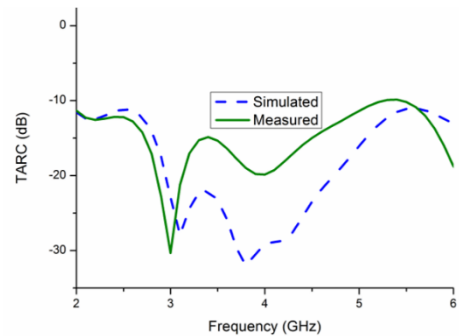


Fig. 5: Measured and simulated values of TARC

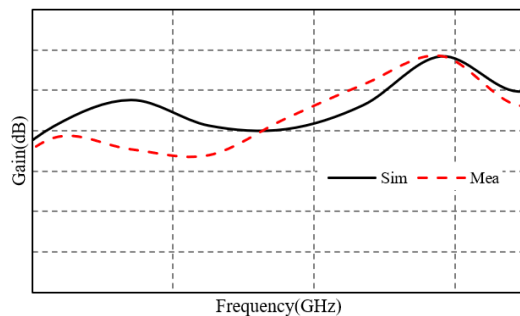


Fig. 6: Measured and simulated gain of proposed MIMO antenna.

4. Conclusion

A quad element paddle-shaped printed MIMO antenna with H-and Π - formed in the ground plane for wearable application is presented and examined in this article. The overall size of the 2-port MIMO antenna is $58 \times 79 \times 1 \text{ mm}^3$. The advantages of the designed structure observed in the term of simple in structure for isolation improvement as well as simple in geometry. Using these contemplations, a compact textile-based two elements MIMO antenna is intended and analyzed to function in the range of from 2.34 GHz to 6 GHz application. The results are equally encouraging, with a TARC value greater than -10 dB and an ECC value lower than 0.02. Subsequently, the presented design is a lot of suitable for wearable and different frequency band applications.

References

- 1) Y. Liu, L. Si, M. Wei et al., "Some recent developments of microstrip antenna," *Int. Journ. of Ant. And Propag.*, 2012 (Article ID 428284) 10 (2012). doi: 10.1155/2012/428284
- 2) T. Mobashsher and A. Abbosh, "Utilizing symmetry of planar ultra-wideband antennas for size reduction and enhanced performance," *IEEE Ant. and Propag. Magaz.*, 57 (2) 153-166 (2015). doi: 10.1109/MAP.2015.2414488
- 3) R. Cicchetti, A. Faraone, D. Caratelli, and M. Simeoni, "Wideband, multiband, tunable, and smart antenna systems for mobile and UWB wireless applications 2014," *Int. Journ. of Ant. And Propag.*, 2015 (Article ID 536031) 3 (2015). doi: 10.1155/2015/536031
- 4) Mahyudin, Alimin, et al. "Mechanical Properties and Biodegradability of Areca Nut Fiber-reinforced Polymer Blend Composites." *EVERGREEN Joint Journal of Novel Carbon Resource Sciences & Green Asia Strategy* 7 (3) 366-372 (2020). doi: 2324/4068618
- 5) Weake, Nawaharsh, et al. "Optimising Parameters of Fused Filament Fabrication Process to Achieve Optimum Tensile Strength Using Artificial Neural Network." *EVERGREEN Joint Journal of Novel Carbon Resource Sciences & Green Asia Strategy* 7 (3) 373-381 (2020). doi: 2324/4068614
- 6) Wu, Chao-Ming, Yung-Lun Chen, and Wen-Chung Liu. "A compact ultrawideband slotted patch antenna for wireless USB dongle application." *IEEE Ant. Wirel. Propag. Lett.*, 11 596-599 (2012). doi: 10.1109/LAWP.2012.2202366
- 7) Kumar, Sanjeev, Ravi Kumar, and Rajesh Kumar Vishwakarma. "A Circular Disc Microstrip Antenna with Dual Notch Band for GSM/Bluetooth and Extended UWB Applications." *International Journal of Engineering & Technology* 7 (2.16) 11-18 (2018). doi: 10.14419/ijet.v7i2.16.11408
- 8) "Federal Communications Commission revision of Part 15 of the Commission's rules regarding ultrawideband transmission system from 3.1 to 10.6 GHz," ET-Docket 98-153, Federal Communications Commission, FCC, Washington, DC (2002). <https://www.fcc.gov/document/revision-part-15-commissions-rules-regarding-ultra-wideband>
- 9) Abbasi, Qammer H., et al. "Ultrawideband band-notched flexible antenna for wearable applications." *IEEE Antennas and Wireless Propagation Letters* 12 1606-1609 (2013). doi: 10.1109/LAWP.2013.2294214
- 10) Bekasiewicz, A., and S. Koziel. "Compact UWB monopole antenna for internet of things applications." *Electronics Letters* 52 (7) 492-494 (2016). doi: 10.1049/el.2015.4432
- 11) Srivastava, Gunjan, Akhilesh Mohan, and Ajay Chakrabarty. "Compact reconfigurable UWB slot antenna for cognitive radio applications." *IEEE Antennas and Wireless Propagation Letters* 16 1139-1142 (2016). doi: 10.1109/LAWP.2016.2624736
- 12) Kumar, Sanjeev, Ravi Kumar, Rajesh Kumar Vishwakarma, and Kunal Srivastava. "An improved compact MIMO antenna for wireless applications with band-notched characteristics." *AEU-International Journal of Electronics and Communications* 90 20-29 (2018). doi: 10.1016/j.aecue.2018.04.008
- 13) Choudhary, Shilpa, et al. "Read Range Optimization of Low Frequency RFID System in Hostile Environmental Conditions by Using RSM Approach." *EVERGREEN Joint Journal of Novel Carbon Resource Sciences & Green Asia Strategy*, 7 (3) 396-403 (2020). doi: 2324/4068619
- 14) Sawant, Swapnil, et al. "System Modelling of an Electric Two-Wheeled Vehicle for Energy Management Optimization Study." *EVERGREEN Joint Journal of Novel Carbon Resource Sciences & Green Asia Strategy*, 8 (3) 642-650 (2021). doi: 10.5109/4491656
- 15) Kumar, Sanjeev, et al. "Slotted circularly polarized microstrip antenna for RFID application." *Radioengineering*, 26 (4) 1025-32 (2017). doi: 10.13164/re.2017.1025
- 16) Aun, Nur Farahiyah Mohamad, Ping Jack Soh,

- Azremi Abdullah Al-Hadi, Mohd Faizal Jamlos, Guy AE Vandenbosch, and Dominique Schreurs. "Revolutionizing wearables for 5G: 5G technologies: Recent developments and future perspectives for wearable devices and antennas." *IEEE Microwave Magazine* 18 (3) 108-124 (2017). doi: 10.1109/MMM.2017.2664019
- 17) Hong, Seungman, Seok Hyon Kang, Youngsung Kim, and Chang Won Jung. "Transparent and flexible antenna for wearable glasses applications." *IEEE Transactions on Antennas and Propagation* 64 (7) 2797-2804 (2016). doi: 10.1109/TAP.2016.2554626
 - 18) Yan, Sen, Ping Jack Soh, and Guy AE Vandenbosch. "Wearable ultrawideband technology—a review of ultrawideband antennas, propagation channels, and applications in wireless body area networks." *IEEE Access* 6 42177-42185 (2018). doi: 10.1109/ACCESS.2018.2861704
 - 19) Qu, Longyue, Haiyan Piao, Yunhao Qu, Hyung-Hoon Kim, and Hyeongdong Kim. "Circularly polarised MIMO ground radiation antennas for wearable devices." *Electronics Letters* 54 (4) 189-190 (2018). doi: 10.1049/el.2017.4348
 - 20) Zaini, N. Z., N. B. Kamaruzaman, and U. Abidin. "Magnetic Microbeads Trapping using Microfluidic and Permanent Magnet System." *Evergreen Joint Journal of Novel Carbon Resource Sciences & Green Asia Strategy*, 8 (1) 156-162 (2021). doi: 10.5109/4372272
 - 21) Nugraha, Gde Dharma, Budi Sudiarto, and R. Kalamullah. "Machine learning-based energy management system for prosumer." *Evergreen Joint Journal of Novel Carbon Resource Sciences & Green Asia Strategy*, 7 (2) 309-313 (2020). doi: 10.5109/4055238
 - 22) Yan, Sen, Ping Jack Soh, and Guy AE Vandenbosch. "Dual-band textile MIMO antenna based on substrate-integrated waveguide (SIW) technology." *IEEE Transactions on antennas and propagation* 63 (11) 4640-4647 (2015). doi: 10.1109/TAP.2015.2477094
 - 23) Wen, Dingliang, Yang Hao, Max O. Munoz, Hanyang Wang, and Hai Zhou. "A compact and low-profile MIMO antenna using a miniature circular high-impedance surface for wearable applications." *IEEE Transactions on Antennas and Propagation*, 66 (1) 96-104 (2017). doi: 10.1109/TAP.2017.2773465
 - 24) S. Blanch, J. Romeu, and I. Corbella, "Exact representation of antenna system diversity performance from input parameter description," *IEEE Electron. Lett.*, 39 (9) 705-707 (2003). doi: 10.1049/el:20030495
 - 25) Manteghi, Majid, and Yahya Rahmat-Samii. "A novel miniaturized triband PIFA for MIMO applications." *Microwave and Optical Technology Letters*, 49 (3) 724-731 (2007). doi: 10.1002/mop.22239