九州大学学術情報リポジトリ
Kyushu University Institutional Repository

Rayleigh Scattering Measurement of Neutral Atom Number Density Downstream of a Hall Thruster under Cold Flow Conditions

Iwamoto, Masataka
Department of Advanced Energy Engineering Science, Kyushu University

Yamamoto, Naoji
Department of Advanced Energy Engineering Science, Faculty of Engineering Science, Kyushu University

Morita, Taichi
Department of Advanced Energy Engineering Science, Faculty of Engineering Science, Kyushu University

Nakashima, Hideki
Department of Advanced Energy Engineering Science, Faculty of Engineering Science, Kyushu University

他

https://hdl.handle.net/2324/4377920

出版情報：Transactions of the Japan Society for Aeronautical and Space Sciences. 60 (5), pp.327-330, 2017-09-04. THE JAPAN SOCIETY FOR AERONAUTICAL AND SPACE SCIENCES
バージョン：
権利関係：(c) 2017 The Japan Society for Aeronautical and Space Sciences

KYUSHU UNIVERSITY

Trans. Japan Soc. Aero. Space Sci.
Vol. 60, No. 5, pp. 327–330, 2017

Research Note

Rayleigh Scattering Measurement of Neutral Atom Number Density Downstream of a Hall Thruster under Cold Flow Conditions*

Masataka IWAMOTO,[1)] Naoji YAMAMOTO,[1)†] Taichi MORITA,[1)] Hideki NAKASHIMA,[1)]
Kentaro TOMITA,[2)] and Kiichiro UCHINO[2)]

[1)]*Department of Advanced Energy Engineering Science, Kyushu University, Kasuga, Fukuoka 816–8580, Japan*
[2)]*Department of Applied Science for Electronics and Materials, Kyushu University, Kasuga, Fukuoka 816–8580, Japan*

Key Words: Electric Propulsion, Neutral Density Measurement, Facility Effect, Rayleigh Scattering, Optical Method

1. Introduction

Electric propulsion systems show considerable promise for satellite station-keeping and orbital transfer applications; they offer an attractive combination of high thrust efficiency, exceeding 50%, and high specific impulse, as compared to chemical thrusters. The development of electric propulsion systems, however, will depend on the measurement of neutral atom density, since charge exchange collisions lead to sputtering on the satellite surface and ion engine grids.[1–4)] The measurement of neutral atom number density will also be crucial for the estimation of on-orbit performance from ground test data, since background neutral particles affect ionization and acceleration processes as well as the charge–exchange collisional processes. In fact, the presence of background neutral particles may lead to increased discharge current, thrust, and plume divergence, and cause differences in the oscillation characteristics of electric systems under testing conditions as opposed to on-orbit condition.[5)]

There has been considerable work[5–10)] on vacuum facility effects on Hall thrusters, including thrust measurements at various back pressures, numerical modeling, and direct measurement of neutral atom number density. These studies have shown that thrust performance depends on pressure, and there exists a critical back pressure for adequate evaluation of thrust performance, though the pressure is specific to the test facility. This is because the neutral number density distribution in the vacuum chamber is different in each facility, due to differences in thruster/pump/vacuum chamber geometries.[10–12)]

There are various techniques for measuring neutral atom number density: ionization gauge measurements,[12,13)] differential pressure gauge measurements,[14)] absorption spectroscopy,[15)] laser induced fluorescence (LIF),[16)] two-photon absorption LIF spectroscopy,[17)] electron beam excitation,[18)] and cavity ring-down spectroscopy.[19)] The use of LIF has proven to be effective for the measurement of relative number density and velocity, though it is difficult to use for quantitative number density measurements.

The approach presented here uses the laser Rayleigh scattering technique.[20,21)] This is a non-intrusive method; it does not disturb the plasma and neutral flow. Number densities can be measured quantitatively by calibration using 10^4 Pa nitrogen, so a complicated collisional-radiative model is not required. The Rayleigh scattering spectrum reflects the velocity distribution of the atoms, so propellant xenon atoms can be distinguished from the ambient xenon atoms. In addition, even when both ions and electrons are present, the neutral number density can be estimated, since the scattering spectrum is a convolution of Rayleigh and Thomson spectra.[22)] The contribution of scattering from metastable atoms can be addressed[23)] by measuring the population of metastable atoms by laser absorption spectroscopy.[15)]

Measurement of neutral atom density using Rayleigh scattering is not novel; it has been used in compressible turbulent-flow research,[21)] plasma process research,[22,23)] and other fields. The target range of our measurement, however, is below 10^{20} m^{-3}, at least one order of magnitude lower than previous studies. The aim of this study is to demonstrate the measurement of neutral atom number density in high vacuum (pressure less than 1 Pa) using the Rayleigh scattering technique, in order to understand the effect of neutral particles on thrust performance. First, we measure the nitrogen molecular number density in the absence of a thruster. Next, we measure the xenon neutral number density downstream of a miniature Hall thruster, without a plasma discharge.

2. Experimental Setup

Our laser Rayleigh scattering measurement setup is shown in Fig. 1. A 0.267 m diameter by 0.4 m long vacuum chamber with a turbo molecular pump (TMP, ULVAC, PT150, pumping speed 150 l/s with nitrogen gas) is used. Nitrogen gas is supplied from the upstream port and the pressure inside the chamber is controlled by changing the conductance of the needle valve upstream of the nitrogen port. The horizontal distance from the probe laser path to the N_2 port is 200 mm. The miniature Hall thruster is positioned 6 mm upstream of the probe laser path. Pressure is measured by means of a pressure sensor (Keyence, AP-C31) and an ion-

© 2017 The Japan Society for Aeronautical and Space Sciences
*Received 30 January 2017; final revision received 8 May 2017; accepted for publication 16 May 2017.
†Corresponding author, yamamoto@aees.kyushu-u.ac.jp

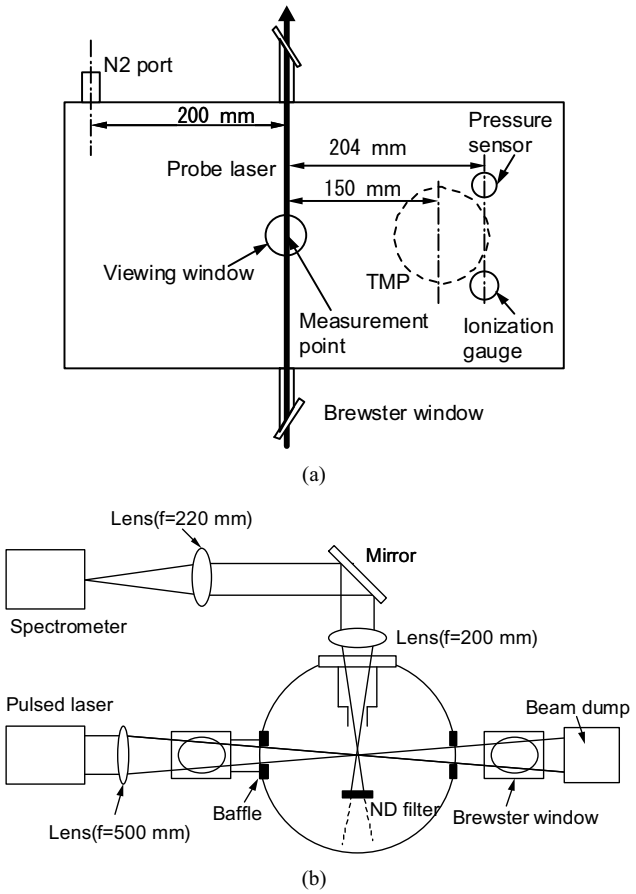

Fig. 1. Schematic of laser Rayleigh scattering system for Hall thruster, (a) top view, (b) side front view.

ization gauge (ULVAC WIT-18) on the chamber wall. The horizontal distance from the probe laser path to the ionization gauge is 204 mm. The chamber baseline pressure was below 3×10^{-3} Pa for these experiments, and the room temperature was 294 K. We assume that the nitrogen molecular temperature and xenon atom temperature in the vacuum chamber are the same as the room temperature (294 K).

Second harmonic beams of two Nd:YAG lasers, wavelength 532 nm, were used as the probe light source. The first laser has maximum energy 200 mJ, repetition rate 10 Hz, pulse width 6 ns, and nominal beam divergence 0.6 mrad (Continuum, Surelite II). The second has maximum energy 100 mJ, repetition rate 50 Hz, pulse width 3 ns, and nominal beam divergence 0.6 mrad (EKSPLA, NL231). Each beam is focused through a plano-convex focusing lens (focal length, f, 500 mm). The diameter of the focal spot for each beam was estimated by observing the spatial profile of Rayleigh scattering in 40 kPa air, and found to be 150 μm and 100 μm, respectively; the difference is due to differences in the actual beam divergence. Each beam is delivered through a Brewster window and passes through another Brewster window to a beam dump. Buffers are used in front of both entrance and exit windows to prevent light scattered on the windows from reaching the detector. The scattered radiation is observed at 90 degrees to both the Hall thruster axis and the probe laser beam. Scattered light is focused onto the entrance slit of a triple grating spectrometer (TGS) with two achromatic lenses

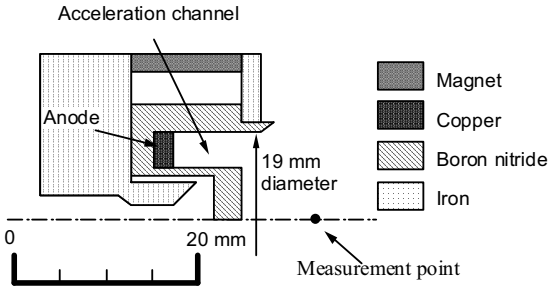

Fig. 2. Cross-section of miniature Hall thruster developed at Kyushu University.

of $f = 220$ mm and $f = 200$ mm. The TGS was used to obtain the scattering light spectrum, in order to distinguish the Rayleigh scattering signal from the Thomson scattering signal for future measurement of neutral atom density with plasma discharge.[23] The instrumental function of the detection system is 0.35 nm (full-width at half-maximum) and the linear dispersion is 1.66 nm/mm. In order to reduce the incidence of stray light (primarily from multiple wall reflected light), an absorptive neutral density (ND) filter with an anti-reflection coating (optical density 6) is set upstream of the observation direction as a viewing dump. The scattered light is dispersed using the TGS with dispersion subtraction,[24] and is detected by a photo-multiplier tube (PMT, Hamamatsu, R943-02).

The estimated Rayleigh scattered photon number is so small that we use a photon counting method. The detected Rayleigh scattered signals are analyzed by a photon counting device (SR430, Stanford Research Systems) after more than 5,000 laser shots. The measurement periods per pulse with the 6 ns pulse width laser and 3 ns laser are 10 ns (5 ns × 2 bin) and 5 ns (5 ns × 1 bin), respectively. A high-speed photo diode is used for detection of laser firing and triggering the PMT signal. The incident laser is fixed at 10 mJ, to avoid double counting. We confirmed that an increase in laser energy does not contribute to improvement of the signal to noise (SN) ratio. The experimental uncertainty for each point was determined primarily from the statistical fluctuation in the number of detected photons.[25]

Absolute calibration was performed by Rayleigh scattering measurement through the ND filter (optical density of 4) at 3, 6, 9, and 12 kPa nitrogen gas. The ratio of the xenon cross section to the nitrogen cross section was assumed to be 1.83, following Ref. 26).

Figure 2 shows the miniature Hall thruster developed at Kyushu University.[27] The anode is located 9 mm upstream of the thruster exit face, and the outer acceleration channel diameter is 19 mm. Details and performance are presented in Ref. 27). For the present experiments, the thruster was positioned on the axis of the chamber and the thruster exit face was set 6 mm upstream of the probe beam. Xenon atom number density was measured without discharge; the gas was supplied to the thruster using a thermal mass flow controller (Brooks Instrument, 5850S, full scale of 3 sccm). The background pressure detected using an ionization gauge on the chamber was 0.05 Pa at xenon mass flow rate of 0.2 mg/s.

©2017 JSASS

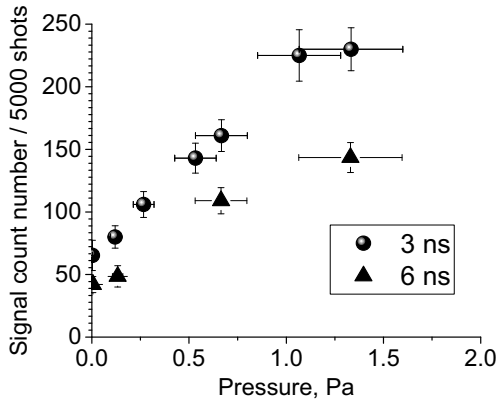

Fig. 3. Rayleigh scattering signal count number per 5,000 laser shots for various pressures.

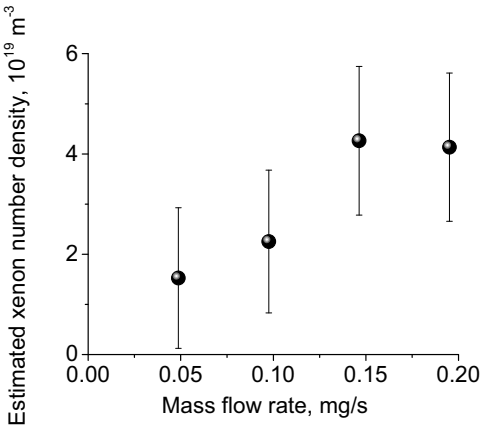

Fig. 4. Xenon number density vs. mass flow rate on axis 6 mm downstream of thruster exit.

3. Results and Discussion

Figure 3 shows the Rayleigh scattering signal count number per 5,000 laser shots for various pressures. Both signals have a linear relation to the pressure measured by the ionization gauge. The estimated number of photons at 1 Pa pressure nitrogen with 10 mJ incident laser per shot is about 0.06, considering the Rayleigh scattering cross section of 6×10^{-32} m^2/sr, observed length along the probe beam of 2 mm, solid angle of 0.18, optical system efficiency of 0.06, and quantum efficiency of the PMT of 0.1. This estimate is in approximate agreement (within a factor of two) with the obtained result.

The S/N ratio is better with the 3 ns pulse duration than with the 6 ns pulse. The minimum detection limits at pulse durations of 3 ns and 6 ns are estimated to be 0.05 Pa and 0.08 Pa, respectively, because the reducing the detection duration from 10 ns to 5 ns reduces the chance of incidence of stray light on the chamber surface. The difference in the slope, which corresponds to the sensitivity of the system, is due to inaccuracies in the optical system and a difference in beam divergence (the diameters of the probe laser beam at the measurement position are 100 mm and 150 mm, respectively, for the 3 ns and 6 ns lasers.

We measured the neutral particle atom number density by Rayleigh scattering under high vacuum conditions; xenon atom number density was measured on the axis 6 mm downstream of the miniature Hall thruster, using the same method. The 3 ns pulse width laser was used, since it has a better S/N ratio. Figure 4 shows the estimated xenon atom number density for four mass flow rates through the miniature Hall thruster without plasma discharge (cold flow conditions). The number density at that position was 2.3×10^{19} m^{-3}. This is in good agreement with the number density from a 1D calculation of 2.9×10^{19} m^{-3} (the flux tube cross section is estimated as a circle of diameter 19 mm, and the temperature of the xenon atom is estimated to be 294 K), considering the divergence of the neutral atoms from the acceleration channel of the thruster. The large uncertainty is due to stray light; for lower density measurements (below 10^{19} m^{-3}), the incidence of stray light will need to be reduced.

4. Conclusion

The neutral number density of a miniature Hall thruster was successfully measured under cold flow conditions using the nonintrusive laser Rayleigh scattering optical method. Pressure estimated from Rayleigh scattering shows a linear relation to the pressure measured by an ion gauge under high vacuum (0.2–1.3 Pa). The adoption of a short laser pulse width improves the S/N ratio, that is, it improves the detection limit for the neutral atom number density; the detection limit of current system is 1.7×10^{19} m^{-3}. The adoption of a short wavelength laser also improves the sensitivity of the system, since the scattering cross section is inversely proportional to the biquadrate of the laser wavelength. A demonstration measurement of the neutral atom number density at 6 mm downstream of a miniature Hall thruster was performed; at a xenon mass flow rate of 0.2 mg/s, the xenon atom number density was estimated to be $(4 \pm 1.5) \times 10^{19}$ m^{-3}.

The present results prove that the Rayleigh scattering method will be useful for measuring the neutral atom number density in the plume region, with further improvement of the detection limit. This method could be used to reveal vacuum facility effects on electric propulsion system performance, and further illuminate the physics behind electric propulsion. In future work, we plan to further improve the detection limit by using a laser with even shorter wavelength and pulse width.

Acknowledgments

This work was supported by JSPS KAKENHI Grant Numbers JP26289324 and JP16K14506, and the International Center for Space Weather Science and Education at Kyushu University.

References

1) Goebel, D. M. and Katz, I.: Ion Thruster Accelerator Grids, Chap. 5, *Fundamentals of Electric Propulsion: Ion and Hall Thrusters*, Wiley, Hoboken, NJ, 2008.

©2017 JSASS

2) Nakano, M., Tachibana, T., and Arakawa, Y.: A Scaling Law of the Life Estimation of the Three-Grid Optics for an Ion Engine, *Trans. Jpn. Soc. Aeronaut. Space Sci.*, **45** (2002), pp. 154–161, doi:10.2322/tjsass.45.154
3) Wang, J., Polk, J., Brophy, J., and Katz, I.: Three-Dimensional Particle Simulations of Ion-Optics Plasma Flow and Grid Erosion, *J. Propul. Power*, **19** (2003), pp. 1192–1199, doi:10.2514/2.6939
4) Hyakutake, T., Nishida, M., Kuninaka, H., and Toki, K.: DSMC-PIC Analysis of a Plume from MUSES-C Ion Engines, *Trans. Jpn. Soc. Aeronaut. Space Sci.*, **46** (2003), pp. 24–30, doi:10.2322/tjsass.46.24
5) Passaro, A., Vicini, A., Nania, F., and Biagioni, L.: Numerical Rebuilding of SMART-1 Hall Effect Thruster Plasma Plume, *J. Propul. Power*, **26**, 1 (2010), pp. 149–158, doi:10.2514/1.36921
6) Randolph, T., Kim, V., Kaufman, H., Kozubsky, K., Zhurin, V., and Day, M.: Facility Effects on Stationary Plasma Thruster Testing, IEPC Paper 1993-093, 1993.
7) Brown, D. L. and Gallimore, A. D.: Evaluation of Facility Effects on Ion Migration in a Hall Thruster Plume, *J. Propul. Power*, **27**, 1 (2011), pp. 573–585, doi:10.2514/1.b34068
8) Kamhawi, H., Huang, W., Haag, T., Shastry, R., Thomas, R., Yim, J., Herman, D., Williams, G., Myers, J., Hofer, R., Mikellides, I., Sekerak, M., and Polk, J.: Performance and Facility Background Pressure Characterization Tests of NASA's 12.5-kW Hall Effect Rocket with Magnetic Shielding Thruster, IEPC Paper 2015-07, 2015.
9) Walker, M. L. R., Victor, A. L., Hofer, R. R., and Gallimore, A. D.: Effect of Backpressure on Ion Current Density Measurements in Hall Thruster Plumes, *J. Propul. Power*, **21** (2005), pp. 408–415, doi:10.2514/1.7713
10) Diamant, K. D., Liang, R., and Corey, R. L.: The Effect of Background Pressure on SPT-100 Hall Thruster Performance, AIAA Paper 2014-3710, 2014, doi:10.2514/6.2014-3710
11) Kamhawi, H., Huang, W., Haag, T., and Spektor, R.: Investigation of the Effects of Facility Background Pressure on the Performance and Operation of the High Voltage Hall Accelerator, AIAA Paper 2014-3707, 2014, doi:10.2514/6.2014-3707
12) Walker, M. L. R., Gallimore, A. D., Boyd, J. D., and Cai, C.: Vacuum Chamber Pressure Maps of a Hall Thruster Cold-Flow Expansion, *J. Propul. Power*, **20** (2004), pp. 1127–1132, doi:10.2514/1.8973
13) Dankanich, J. W., Swiatek, M. W., and Yim, J. T.: A Step towards Electric Propulsion Testing Standards: Pressure Measurements and Effective Pumping Speeds, AIAA Paper 2012-3737, 2012, http://dx.doi.org/10.2514/6.2012-3737
14) Nakayama, Y. and Narisawa, K.: Neutral Density Measurement of Ion Thruster with Differential Pressure Gauge, *Trans. JSASS Aerospace Technology Japan*, **12**, ists30 (2014), pp. Pb_73–Pb_78, doi:10.2322/tastj.12.Pb_73
15) Yokota, S., Sakoh, D., Matsui, M., Komurasaki, K., and Arakawa, Y.: Charge Exchange Ion Number Density Distribution in Hall Thruster Plume, *Vacuum*, **83** (2008), pp. 57–60, doi:10.1016/j.vacuum.2008.03.024
16) Jarrige, J., Packan, D., Duchemin, O., and Balika, L.: Assessment of the Azimuthal Homogeneity of the Neutral Gas in a Hall Effect Thruster using Electron Beam Fluorescence, IEPC Paper 2015-012, 2015.
17) Huang, W., Gallimore, A. D., and Hofer, R. R.: Neutral Flow Evolution in a Six-Kilowatt Hall Thruster, *J. Propul. Power*, **27** (2011), pp. 553–563, doi:10.2514/1.B34048
18) Eichhorn, C., Lohle, S., Fasoulas, S., Leiter, H., Fritzsche, S., and Auweter-Kurtz, M.: Photon Laser-Induced Fluorescence of Neutral Xenon in a Thin Xenon Plasma, *J. Propul. Power*, **28** (2012), pp. 1116–1119, doi:10.2514/1.B34434
19) Tao, L., Yamamoto, N., and Yalin, A. P.: Cavity Ring-Down Spectroscopy Sensor for Ion Beam Etch Monitoring and End-Point Detection of Multilayer Structures, *Rev. Sci. Instrum.*, **79** (2008), 115107, doi:10.1063/1.2995765
20) Miles, R. B., Lempert, W. R., and Forkey, J. N.: Laser Rayleigh Scattering, *Meas. Sci. Technol.*, **12** (2001), pp. R33–R51, http://dx.doi.org/10.1088/0957-0233/12/5/201
21) Mielke, A. F., Elam, K. A., and Sung, C.-J.: Multi-Property Measurements at High Sampling Rates Using Rayleigh Scattering, *AIAA J.*, **47**, 4 (2009), pp. 850–862, doi:10.2514/1.37369
22) Cronrath, W., Tanaka, H., Bowden, M. D., Uchino, K., and Muraoka, K.: Measurement of the Neutral Particle Density in an Electron Cyclotron Resonance Plasma by Rayleigh Scattering, *Jpn. J. Appl. Phys.*, **34** (1995), pp. L1402–L1404, http://dx.doi.org/10.1143/JJAP.34.L1402
23) Hori, T., Bowden, M. D., Uchino, K., Muraoka, K., and Maeda, M.: Measurements of Electron Temperature, Electron Density, and Neutral Density in a Radio-Frequency Inductively Coupled Plasma, *J. Vacuum Sci. Technol. A*, **14** (1996), pp. 144–151, http://dx.doi.org/10.1116/1.579911
24) Yamamoto, N., Tomita, K., Sugita, K., Kurita, T., Nakashima, H., and Uchino, K.: Measurement of Xenon Plasma Properties in an Ion Thruster Using Laser Thomson Scattering Technique, *Rev. Sci. Instrum.*, **83** (2012), 073106, http://dx.doi.org/10.1063/1.4737144
25) Kunze, H. J.: The Laser as a Tool for Plasma Diagnostics, *Plasma Diagnostics*, Lochte-Holtgreven, W. (ed.), North-Holland Publishing Company, Amsterdam, 1968, p. 550.
26) DeSilva, A. W. and Goldenbaum, G. C.: Plasma Physics, *Methods of Experimental Physics*, Lovberg, R. H. and Griem, H. R. (ed.), Vol. 9, Part A, Chap. 3, Academic Press, New York, 1971.
27) Yamamoto, N., Ezaki, T., and Nakashima, H.: Thrust Performance of a Low Power Hall Thruster, *Trans. JSASS Aerospace Technology Japan*, **10**, ists28 (2012), pp. Tb_9–Tb_12, doi:10.2322/tastj.10.Tb_9

Y. Ohkawa
Associate Editor

©2017 JSASS