

Stationary Incompressible Viscous Flow Analysis by a Domain Decomposition Method

Kanayama, Hiroshi
九州大学大学院工学研究院知能機械システム部門

Tagami, Daisuke
九州大学大学院工学研究院知能機械システム部門

Chiba, Masatsugu
九州大学大学院工学研究院知能機械システム部門

<https://hdl.handle.net/2324/5570>

出版情報 : Lecture Notes in Computational Science and Engineering. 55, pp.611-618, 2006-12.
Springer
バージョン :
権利関係 : © 2006 Springer

Stationary incompressible viscous flow analysis by a domain decomposition method

Hiroshi Kanayama¹, Diasuke Tagami², and Masatsugu Chiba³

¹ Faculty of Engineering, Kyushu University kanayama@mech.kyushu-u.ac.jp

² Faculty of Engineering, Kyushu University tagami@mech.kyushu-u.ac.jp

³ School of Engineering, Kyushu University (former student)

1 Introduction

Requirements to compute stationary flow patterns are often encountered. With progress of computer environments and increasing demand of precise analyses, the number of degrees of freedom (DOF) of such a computation has become larger. However, as far as we know, computational codes are rare, which are efficient for large scale, stationary, and nonlinear flow problems. Therefore, we have developed ADVENTURE_sFlow [3], which is one of modules included in the ADVENTURE project [1].

ADVENTURE_sFlow uses the Newton method as the nonlinear iteration, and to compute the problem at each step of the nonlinear iteration a stabilized finite element method is introduced. Moreover, to reduce the computational costs, an iterative domain decomposition method is applied to stabilized finite element approximations of stationary Navier–Stokes equations, for which Generalized Product-type methods based on Bi-CG (GPBiCG) [6] is used as the iterative solver of the reduced linear system in each step of the nonlinear iteration. A parallel computing method using the Hierarchical Domain Decomposition Method (HDDM) is also introduced.

Numerical results show that ADVENTURE_sFlow can analyze a stationary flow problem with 10 million DOF.

2 Formulation

Let Ω be a three-dimensional bounded domain with the Lipschitz continuous boundary Γ . We consider the stationary incompressible Navier–Stokes equations:

$$\begin{cases} -\frac{1}{\rho}\nabla\cdot\sigma(u,p) + (u\cdot\nabla)u = \frac{1}{\rho}f & \text{in } \Omega, & (1a) \\ \nabla\cdot u = 0 & \text{in } \Omega, & (1b) \\ u = g & \text{on } \Gamma, & (1c) \end{cases}$$

where $u = (u_1, u_2, u_3)^T$ is the velocity [m/s], p is the pressure [N/m²], ρ is the density [kg/m³], $f = (f_1, f_2, f_3)^T$ is the body force [N/m³], $g = (g_1, g_2, g_3)^T$ is the boundary velocity [m/s], and $\sigma(u, p)$ is the stress tensor [N/m²] defined by

$$\sigma_{ij}(u, p) \equiv -p\delta_{ij} + 2\mu D_{ij}(u), \quad D_{ij}(u) \equiv \frac{1}{2} \left(\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right), \quad i, j = 1, 2, 3,$$

with the Kronecker delta δ_{ij} and the viscosity μ [kg/(ms)].

By application of the Newton method to (1) as the nonlinear iteration method, the k th step linearized equations become the following: find (u^k, p^k) such that

$$\begin{cases} -\frac{1}{\rho} \nabla \cdot \sigma(u^k, p^k) + (u^{k-1} \cdot \nabla) u^k + (u^k \cdot \nabla) u^{k-1} \\ \quad \quad \quad = \frac{1}{\rho} f + (u^{k-1} \cdot \nabla) u^{k-1} & \text{in } \Omega, \quad (2a) \\ \nabla \cdot u^k = 0 & \text{in } \Omega, \quad (2b) \\ u^k = g & \text{on } \Gamma. \quad (2c) \end{cases}$$

To avoid some intricate notations, we rewrite the linearized Navier–Stokes equations as follows: find (u, p) such that

$$\begin{cases} -\frac{1}{\rho} \nabla \cdot \sigma(u, p) + (w \cdot \nabla) u + (u \cdot \nabla) w = \tilde{f} & \text{in } \Omega, \quad (3a) \\ \nabla \cdot u = 0 & \text{in } \Omega, \quad (3b) \\ u = g & \text{on } \Gamma, \quad (3c) \end{cases}$$

where w is a given velocity [m/s]. Obviously, the equations (3) yield (2) by substituting

$$u^{k-1}, \quad u^k, \quad p^k, \quad \text{and} \quad \frac{1}{\rho} f + (u^{k-1} \cdot \nabla) u^{k-1}$$

for w, u, p , and \tilde{f} , respectively.

Let \mathcal{T}_h be a decomposition of Ω consisting of a union of tetrahedra, and let K be a tetrahedron in \mathcal{T}_h . Let u_h and p_h be the velocity and the pressure approximated by $P1/P1$ elements. As in [3], a stabilized finite element method is introduced to (3) as follows: find (u_h, p_h) satisfying (1c) such that

$$\begin{aligned} & a_0(u_h, v_h) + a_1(w_h, u_h, v_h) + a_1(u_h, w_h, v_h) + b(v_h, p_h) + b(u_h, q_h) \\ & + \sum_{K \in \mathcal{T}_h} \left\{ \tau_K \left((w_h \cdot \nabla) u_h + (u_h \cdot \nabla) w_h + \frac{1}{\rho} \nabla p_h, \right. \right. \\ & \quad \left. \left. (w_h \cdot \nabla) v_h + (v_h \cdot \nabla) w_h - \frac{1}{\rho} \nabla q_h \right)_K + \delta_K (\nabla \cdot u_h, \nabla \cdot v_h)_K \right\} \\ & = (\tilde{f}, v_h) + \sum_{K \in \mathcal{T}_h} \tau_K \left(\tilde{f}, (w_h \cdot \nabla) v_h + (v_h \cdot \nabla) w_h - \frac{1}{\rho} \nabla q_h \right)_K, \quad (4) \end{aligned}$$

where

$$a_0(u, v) \equiv \frac{2\mu}{\rho} \int_{\Omega} D(u) : D(v) \, dx, \quad a_1(w, u, v) \equiv \int_{\Omega} [(w \cdot \nabla) u] v \, dx,$$

$$b(v, q) \equiv -\frac{1}{\rho} \int_{\Omega} q \nabla \cdot v \, dx, \quad (f, v) \equiv \int_{\Omega} f v \, dx, \quad (f, v)_K \equiv \int_K f v \, dx,$$

v_h and q_h are test functions satisfying $v_h = 0$ on Γ , w_h is the convection velocity approximated by $P1$ elements, and the notation “:” denotes the tensor product. The stabilized parameters τ_K and δ_K are defined by

$$\tau_K \equiv \min \left\{ \frac{h_K}{2 \|w\|_{\infty}}, \frac{\rho h_K^2}{24\mu} \right\}, \quad \delta_K \equiv \min \left\{ \frac{\lambda \rho h_K^2 \|w\|_{\infty}^2}{12\mu}, \lambda h_K \|w\|_{\infty} \right\},$$

where λ denotes a positive constant, $\|w\|_{\infty}$ denotes the maximum norm of w in K , h_K denotes the diameter of K .

Let $\mathbf{K}\mathbf{x} = \mathbf{f}$ be the finite element system derived from (4), where \mathbf{K} denotes the regular, asymmetric coefficient matrix corresponding to (4), \mathbf{x} the vector corresponding to the velocity and the pressure, \mathbf{f} the vector corresponding to the body force and the boundary velocity. Let Ω be divided into subdomains. Let \mathbf{x}_i , \mathbf{x}_b , and \mathbf{x}_t be vectors corresponding to DOF in the interior of Ω , on the interface between subdomains, and on Γ , where \mathbf{x}_t is a given vector. Then, the system $\mathbf{K}\mathbf{x} = \mathbf{f}$ can be rewritten as follows:

$$\begin{bmatrix} \mathbf{K}_{ii} & \mathbf{K}_{ib} & \mathbf{K}_{it} \\ \mathbf{K}_{bi} & \mathbf{K}_{bb} & \mathbf{K}_{bt} \\ \mathbf{0} & \mathbf{0} & \mathbf{E} \end{bmatrix} \begin{Bmatrix} \mathbf{x}_i \\ \mathbf{x}_b \\ \mathbf{x}_t \end{Bmatrix} = \begin{Bmatrix} \mathbf{f}_i \\ \mathbf{f}_b \\ \mathbf{f}_t \end{Bmatrix}, \quad (5)$$

where \mathbf{E} is an identity matrix. Eliminating \mathbf{x}_i from (5), we get the linear system on the interface:

$$\mathbf{S}\mathbf{x}_b = \boldsymbol{\chi}, \quad (6)$$

where

$$\mathbf{S} \equiv \mathbf{K}_{bb} - \mathbf{K}_{bi} \mathbf{K}_{ii}^{-1} \mathbf{K}_{ib},$$

$$\boldsymbol{\chi} \equiv \mathbf{f}_b - \mathbf{K}_{bi} \mathbf{K}_{ii}^{-1} \mathbf{f}_i - (\mathbf{K}_{bt} - \mathbf{K}_{bi} \mathbf{K}_{ii}^{-1} \mathbf{K}_{it}) \mathbf{x}_t.$$

GPBiCG is applied to (6), and \mathbf{x}_b is obtained. In the implementation, the matrix \mathbf{S} is not constructed explicitly. The products of matrices and vectors appearing in GPBiCG can be replaced by solving the Navier–Stokes equations in each subdomain, which implies that the method is fit for parallel computing; see, for example, [2]. The application of the skyline method to a problem in each subdomain yields \mathbf{x}_i from \mathbf{x}_b . The solution in the whole domain at the n th step of the nonlinear iteration is then obtained.

In the actual parallel computing, we adopt HDDM [5] for data and processor management to have the workload balanced among processors. It has already been shown that HDDM is effective for a structural problem where the number of DOF is 100 million [4].

3 Numerical examples

A model of a station is considered as a numerical example; see Fig. 1. The station has one platform on the lower floor, one ticket gate on the upper floor, and three exits from the upper floor to the ground. Two trains are approaching along the red arrows in Fig. 1 with speeds of 1 [m/s]; fixed boundary conditions are imposed on the wall boundaries, and the air flows out from the other sides of the platform and the exits with the stress-free conditions. The body force is set to be 0. The kinematic viscosity μ/ρ is set to be 1.0×10^{-1} [m²/s].

As in Section 2, Ω is divided into a union of tetrahedra, and the flow field is approximated by $P1/P1$ elements: the number of elements and DOF are 18,873,133 and 12,943,664, respectively. The number of subdomains is set to 300,000. Throughout this section, λ is set to be 1.0.

As in Section 2, the Newton method is used for the nonlinear iteration. The initial value of the nonlinear iteration is the finite element solution of the corresponding Stokes problem. The nonlinear iteration is stopped when the relative rate of changes $\|\mathbf{x}^{n+1} - \mathbf{x}^n\|_\infty / \|\mathbf{x}^{n+1}\|_\infty$ becomes smaller than 1.0×10^{-4} , where \mathbf{x}^n denotes the solution vector at the n th step, and $\|\cdot\|_\infty$ is the maximum norm.

In the Stokes equation to obtain the initial condition of the nonlinear iteration, and in each step of the nonlinear iteration, the resulting linear systems on the interface are solved by GPBiCG with a simplified diagonal scaling preconditioner. The initial vector of the GPBiCG iteration is taken to be zero vector in case of the Stokes equation to obtain the initial condition of the nonlinear iteration, and is taken from the solution vector at the previous step at each step of the nonlinear iteration. The GPBiCG iteration is stopped when the relative residual norm $\|\boldsymbol{\chi} - \mathbf{S}\mathbf{x}_b\|_2 / \|\boldsymbol{\chi}\|_2$ becomes smaller than 1.0×10^{-5} , where $\|\cdot\|_2$ denotes the Euclidean norm. Computation of the model was performed on the Alpha21264 system with 30 CPU at the Computing and Communications Center, Kyushu University. It took about 100 hours to compute.

Fig. 2 shows the residual norm versus the number of GPBiCG iterations at each step of the nonlinear iteration. As the iteration progresses, the convergence of GPBiCG becomes faster. Fig. 3 shows the relative rate of change versus the number of nonlinear iterations. The nonlinear iteration by the Newton method works well. Fig. 4 shows the streamlines in the station. In both cases, the flow comes into the station along the approaches of the trains, and goes out from the other sides of the platform and from the exits.

At the end of this section, we consider the difficulty of computations in case of high Reynolds numbers and large scale problems. Table 1 shows the computational data on the mesh size and the numbers of DOF. Table 2 shows CPU time [min] for some Reynolds numbers and meshes. In Cases I and II, the problem can be solved for six Reynolds numbers. However, as the scale increases, the problem cannot be solved for higher Reynolds numbers. Finally, in Case VI, the problem can be solved for only $Re = 50$.

4 Conclusion

To analyze the stationary Navier–Stokes equations, ADVENTURE_sFlow has been developed, which is one of the modules produced in the ADVENTURE project [1]. The Newton method has been introduced as the nonlinear iteration, and the stabilized finite element method as the approximation of the linearized equations in every step of the nonlinear iteration. Moreover, for parallel computations, an iterative domain decomposition method and HDDM have been introduced, which are based on GPBiCG.

A station model with about 10 million DOF has been analyzed.

We are going to analyze problems in case of higher Reynolds numbers or coupled problems in the future.

References

1. ADVENTURE Project, (<http://adventure.q.t.u-tokyo.ac.jp/>)
2. Glowinski, R., Dinh, Q. V., and Periaux, J., Domain decomposition methods for nonlinear problems in fluid dynamics, *Comput. Methods Appl. Mech. Engrg.*, **40** (1983), pp.27–109.
3. Kanayama, H., Tagami, D., Araki, T., and Kume, H., A stabilization technique for steady flow problems, *Int. J. Comput. Fluid Dyn.*, **18** (2004), pp.297–301.
4. Shioya, R., and Yagawa, G., Iterative domain decomposition FEM with preconditioning technique for large scale problem, *ECM'99, Progress in Experimental and Computational Mechanics in Engineering and Material Behaviour*, (1999), pp.255–260.
5. Yagawa, G., and Shioya, R., Parallel finite elements on a massively parallel computer with domain decomposition, *Comput. Syst. Eng.*, **4** (1993), pp.495–503.
6. Zhang, S.-L., GPBi-CG: generalized product-type methods based on Bi-CG for solving nonsymmetric linear systems, *SIAM J. Sci. Comput.*, **18** (1997), pp.537–551.

Table 1. The maximum diameter of mesh and the numbers of DOF.

Case	I	II	III	IV	V	VI
Diameter [m]	1.60	0.90	0.80	0.71	0.59	0.50
DOF [$\times 10^5$]	0.5	2	3	4	7	10

DOF: in round numbers

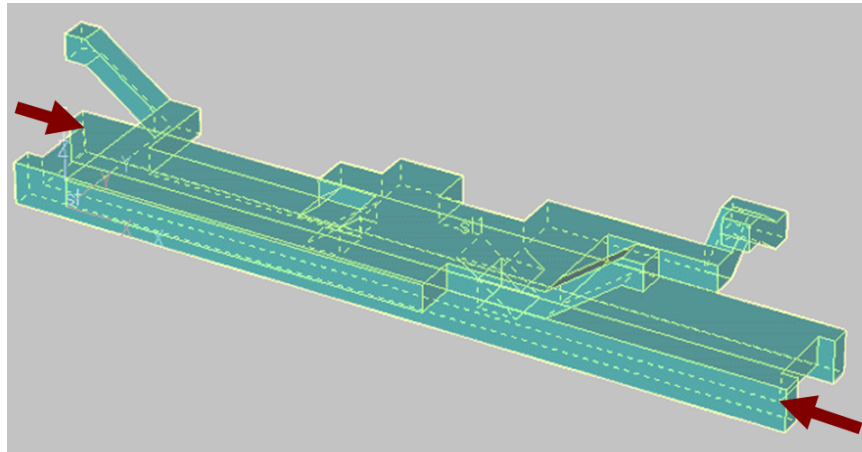


Fig. 1. A station model.

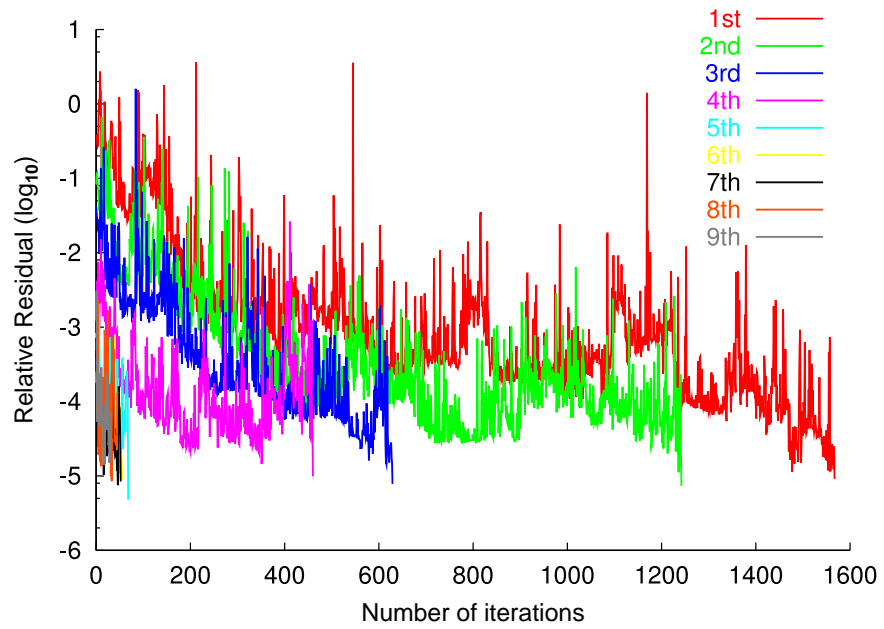


Fig. 2. Relative residuals of GPBiCG at each step of the nonlinear iteration.

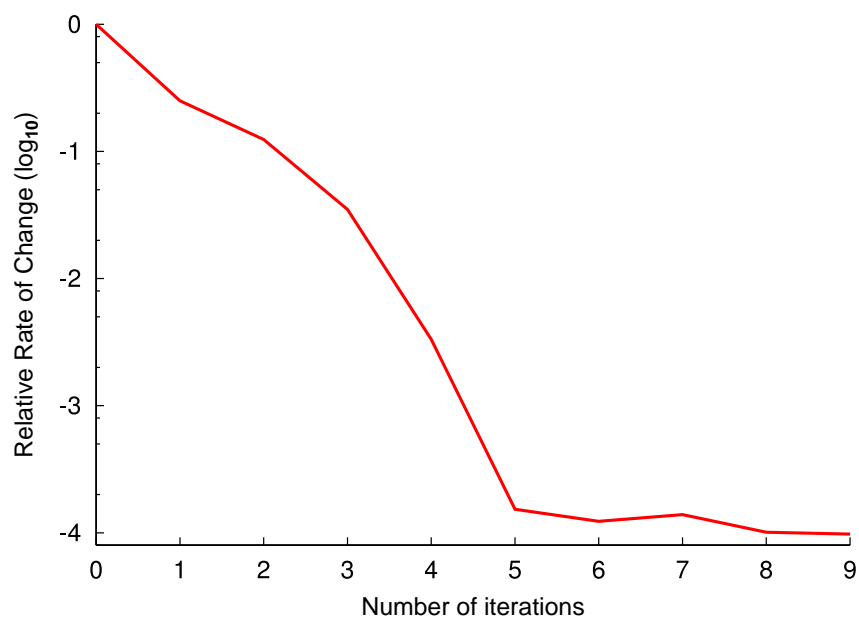


Fig. 3. Relative rates of change in the Newton method.

Table 2. The number of iterations in case of some Reynolds numbers and meshes

Re	I	II	III	IV	V	VI
50	1.67	8.80	15.17	23.07	23.52	48.1
245	1.83	31.60	66.27	120.9	350.5	—
490	1.83	44.45	130.0	343.1	—	—
735	2.00	59.20	152.4	—	—	—
980	2.12	57.77	396.5	—	—	—
1225	2.25	63.91	—	—	—	—

Unit: [min], —: Divergence

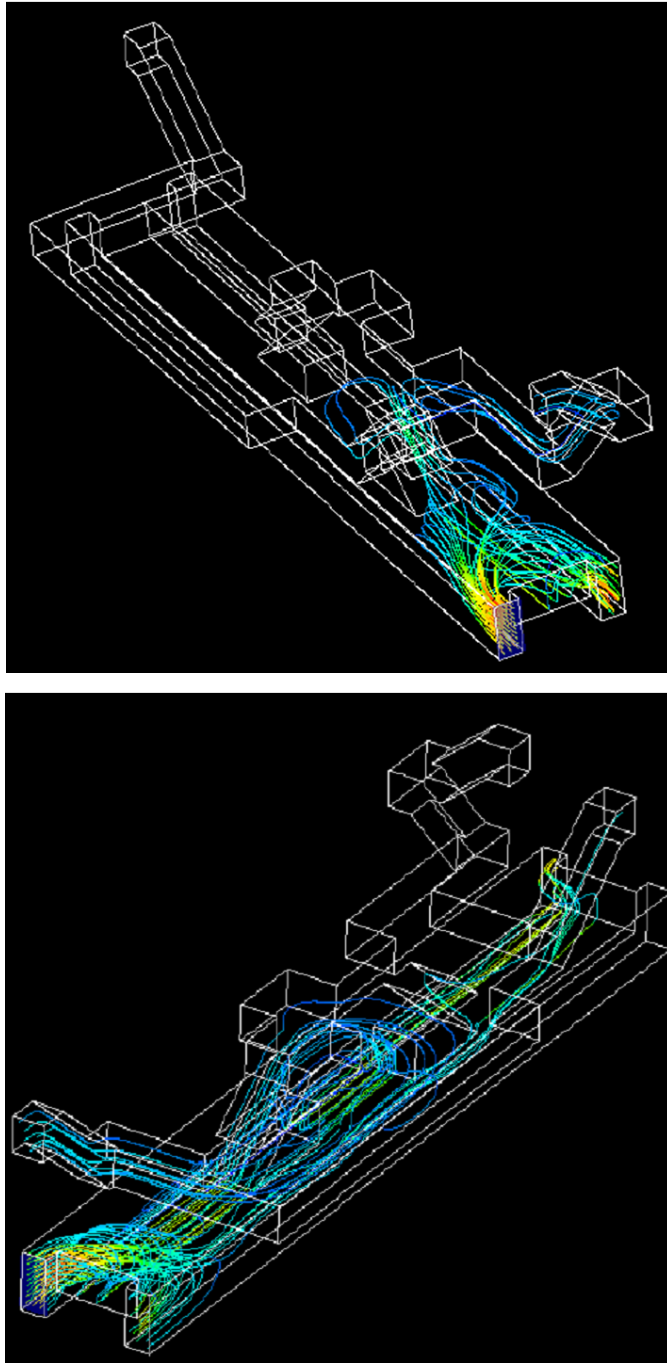


Fig. 4. The streamlines of the station model.