

A Survey of Different VANET Routing Protocols

Shandil, Palak

Department of Computer Science & Engineering, G.L.Bajaj Institute of Technology & Management

<https://doi.org/10.5109/6793653>

出版情報 : Evergreen. 10 (2), pp.976-997, 2023-06. 九州大学グリーンテクノロジー研究教育センター
バージョン :

権利関係 : Creative Commons Attribution-NonCommercial 4.0 International



A Survey of Different VANET Routing Protocols

Palak Shandil

Department of Computer Science & Engineering, G.L.Bajaj Institute of Technology & Management,
Greater Noida, India

Author to whom correspondence should be addressed:

E-mail: palakkanwar11@gmail.com

(Received December 13, 2022; Revised March 13, 2023; accepted April 10, 2023).

Abstract: Vehicle nodes can join or exit the VANET, which is a decentralized sort of network. Due to the network's dynamic nature, reactive routing methods are used for path establishment from source to destination. Reviewing current protocols that are regularly utilized in various proposals and application scenarios is the goal of this work. This review helps when developing selection criteria or metrics for a new protocol. The systematic literature review (SLR) is used in this survey on VANET routing protocols to analyze the most recent state-of-art recommendations. Additionally, in this study, a number of proactive routing and reactive routing protocols are defined. Reactive routing protocols construct a route from source to destination using the most recent network data. The proactive routing protocols establish paths using network-defined information. Routing tables are used by proactive routing technologies to construct paths. Analysis shows that reactive routing strategies outperform proactive routing techniques. The research shows that speed and distance are the most frequent and adaptable metrics in a procedure. Finally, the application of various methods is discussed along with some feasible directions for further research.

Keywords: Bio-Inspired Routing Protocol, Clustering Based Protocol, Geographic Routing Based Protocol, General Protocol, Traffic Aware Routing Protocol, VANET.

1. Introduction

1.1 VANET

The Fifth Generation (5G) era is quickly approaching. Human transportation is being modified by intelligence and networking as the Internet of Vehicles and "Internet+" technology are being applied more and more. There are several difficulties associated with the increased demands for transport efficiency, safety, and the environment at the same time. The Internet of Vehicles technologies is promoted and given a lot of attention thanks to internal and external forces. Because of the advancement of car safety technologies, traffic accidents have recently become a significant issue. According to several studies, 60% of traffic accidents can be prevented if warning information is given to drivers in advance¹⁻¹⁰.

VANET is a variation of MANET. VANET makes it easier for mobile vehicles to share information. Vehicle communication is crucial to VANET's ability to effectively improve traffic comfort and safety. The majority of automobiles will soon have onboard VANET connection technology, according to the projection. Fig. 1 shows the Vehicular Ad Hoc Network schematic diagram.

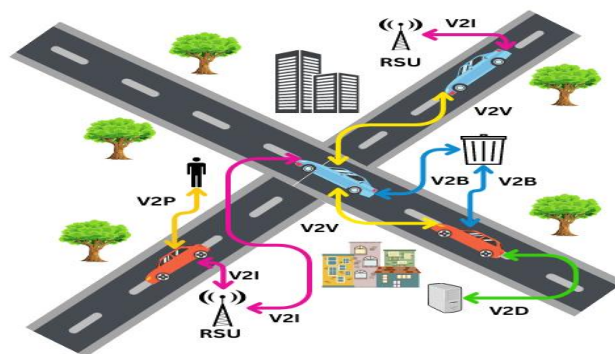


Fig. 1. VANET Schematic Diagram

Fig. 1. shows that the VANET is made up of a collection of vehicles, each having an OBU device fitted, and fixed units that are paved alongside the road. Some RSUs (Roadside Units) can be connected to other networks, including the Internet, to access resources. Each OBU has an integrated wireless network that allows for direct connection with other vehicles, and RSUs are offered with a variety of effective connectivity options. "Vehicle-to-Vehicle", "Infrastructure-to-Vehicle", "Broadband-to-Vehicle" and "vehicle-to-everything" communication are some of the applications employed in the VANET for traffic optimization, road safety, and

passenger infotainment. Fig. 2 shows the general work structure of VANET.

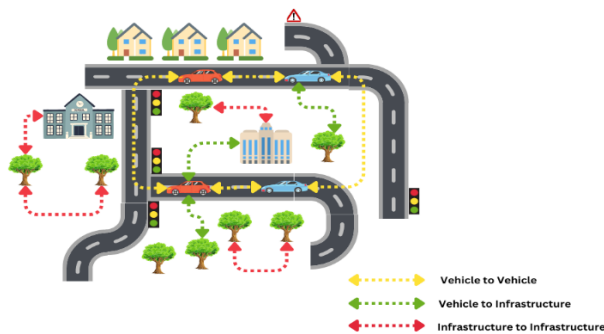


Fig. 2. Overview of the network dedicated to cars

This is the main factor that has made VANET so popular in the government, academic, and industrial sectors^{3,4}.

2. Architecture of Network

The VANET architecture, which concentrates on forming communication between nearby automobiles and machinery that is utilized statically on the side of the road, results in three choices. Three types of VANET architecture exist i.e. ad hoc, infrastructure, and hybrid. These categories are depicted in Fig. 3.

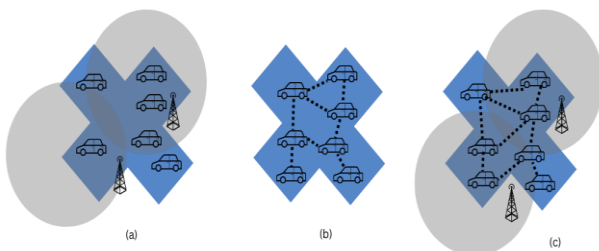


Fig. 3. VANET network architectures (a) Infrastructure (b) Ad hoc (c) Hybrid

Fig. 3(a) shows the V2I infrastructure mode in action ("Infrastructure-to-Vehicle"). In VANET, the stationary access points are used to establish a connection between the cars and the Internet and collect traffic or routing data. The fixed access points and the cars can communicate. The V2V ("vehicle-to-vehicle") ad hoc mode, which employs all cars to build a completely mobile network, is illustrated in Fig. 3(b). For this, information is transferred between each other directly rather than through a centralized access point¹¹⁻²⁵.

In order to function as routers and send communications between the origin and target nodes, -e nodes must be capable of collaborating. Fig. 3(c) depicts the hybrid architecture in which infrastructure and ad hoc architectures are comprised and it is implemented in VANETs. Various applications utilize such architecture to exchange the information among one another through the vehicles and to connect with the Internet using the fixed

access point.

3. Types of Communication in VANET

Specifically, VANETs support four distinct connection types, which are shown in Fig. 1

- a. **Vehicle to Vehicle (V2V):** Ad hoc network-style communication between cars is made possible by this link. Important traffic information, such as reports of accidents or traffic jams, is transmitted, received, or exchanged between cars.
- b. **V2I:** This connection is used to communicate and relay important information on the state of the roads and security concerns involving infrastructure and cars. The RSU ("Roadside unit") and automobiles operate together as part of the vehicle-to-infrastructure to provide a link that may be used to access external networks like the Internet. Compared to V2V connections, this communication requires more bandwidth and is least susceptible to assaults.
- c. **V2B:** In the VANET, the in-car connection is critical for calculating the vehicle's performance, including the driver's behavior, which is essential for ensuring public safety. To connect the vehicles to the wireless broadband system, this connection uses 4G or 5G networks. As the broadband cloud contains more monitoring data as well as data on traffic and entertainment, the V2B is effective in assisting active driving and tracking the vehicle.
- d. **V2P:** This link is used for V2P in order to identify pedestrians and prevent accidents. Smart phone's underlying wireless technologies play a vital role in establishing vehicle-to-pedestrian communication.
- e. **V2X:** This system was created to guarantee safe and independent operation²⁶⁻³¹. Additionally, it is a key component of the self-driving automobiles and smart cities of the future. In this connection, any unit, such as other vehicles or infrastructure along the roadside, is connected to the vehicle. It is broken down into four main parts, including communication between vehicles (V2V), infrastructures (V2I), pedestrians (V2P), and networks (V2N)⁶⁰. In this, automobiles are permitted to communicate instantly with other vehicles as well as critical infrastructure about their speed, coordinates, and acceleration.

4. VANET routing

Vehicles can connect with one another and form the nodes of a big network, thanks to VANETs⁶¹⁻⁶⁵. Given the massive number of cars, VANETs would offer a vast array of advantages. Many additional information (for example, traffic environments, promoting updates, and Ecoupouns) can be transmitted between vehicles through VANET as long as modest delays are tolerated in the targeted applications. For instance, to find out the most recent parking information, an automobile may ask for other

vehicles nearby. Another intriguing new technology is called infotainment, and it uses vehicle-to-vehicle (V2V) connection to deliver multimedia services to subscription vehicles in a specific area. The availability of effective and efficient message-routing protocols is a crucial requirement for the realization of VANET applications. A router uses routing protocols to determine the best path for communication between nodes⁶⁶⁻⁷⁰.

a. VANET Routing Protocols

Vehicles might not be able to communicate vital data and utilize cutting-edge VANET technologies without clear and efficient routing protocols.

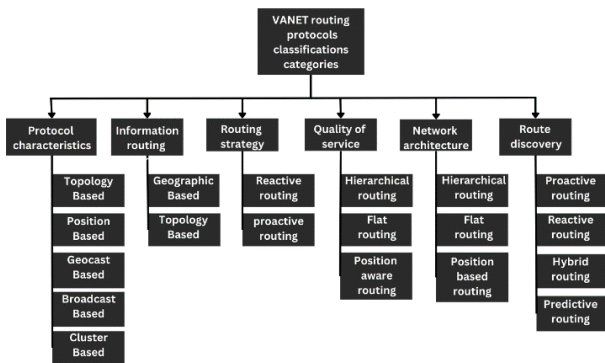


Fig. 4. Categories for classifying protocols

To solve these issues, numerous VANET routing protocols have been created. Routing protocols can be categorized using a variety of factors, such as network design, information routing methods, quality of service requirements, and protocol characteristics⁷¹⁻⁸⁰. VANETs routing protocols can be categorized using a variety of characteristics, as shown in Fig. 4.

I. Topology Based Protocols

Topology is the idea of connecting different components. In a vehicle ad hoc network, by using these methods, the shortest path between source and destination nodes can be found. A routing table contains all data pertaining to routing. Based on how frequently the routing tables are updated, three different types of topology-based protocols can be divided. The explanations of proactive, reactive, and hybrid routing systems are given below:

- a. **Proactive Routing:** Every node in this protocol has a routing table where the routing data is stored. Due to the rapid mobility of nodes, when nodes are added to the network or removed from the network, the most recent routing records must be kept.⁸¹⁻⁹⁰ When a node enters or leaves the network or a link is broken and then repaired, a proactive protocol uses an update step to keep routing tables current and reachable. Increased protocol overhead brought on by this technique has an impact on network throughput as well. DSDV (“Destination Sequence Distance

Vector”), OLSR (“Optimized Link State Routing”), and FSR (“Fisheye State Routing”) are proactive protocols.

- b. **DSDV:** This protocol's foundation is the Bellman-Ford algorithm. With the help of each node, this method focuses on keeping the path as a table to all known destinations⁹¹⁻¹⁰⁰. To inform neighbors of topology changes, we use rapid ads. The Destination Sequence Distance Vector updates the database progressively when just deltas are transmitted to other nodes by a node, or entirely when all information is transmitted by a node to other nodes.



Fig. 5. A picture showing the operation of the DSDV protocol

- c. **OLSR:** This protocol creates a list of neighbors that each node keeps and that are periodically reached by one hop and two hops. Then, an MPR is used to reduce and alleviate the need for as many active relays to reach all 2-hop neighbors (Multi-Point Relay). Therefore, if a node is chosen as a relay point through the source node, it transmits a packet. The MPR algorithm was used for this. With the implementation of the chosen relay nodes, the link state packets are transferred to create the routing tables and to keep them in OLSR¹⁰¹⁻¹¹⁵. As a result, after stabilizing the algorithm, active routes to any location in the network are reached.

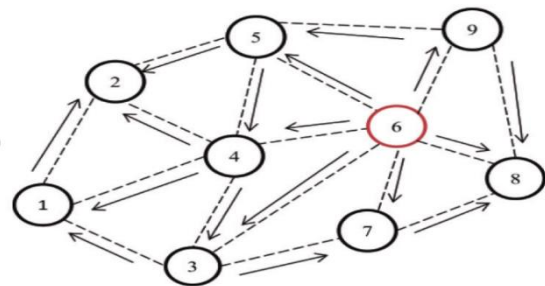


Fig. 6. OLSR Protocol Route Discovery Process

- d. **Reactive protocols:** These protocols don't maintain a fresh routing database and only help in route discovery when transferring data packets from an origin node to a destination node. Flooding is used to begin the route discovery process when sending a message to a specific destination is necessary. Once

the communication has reached its intended location, an answer message is sent back to the origin. Although the route-finding process takes longer because of these protocols, there is less control message overflow. AODV (“Ad-hoc On-Demand Distance Vector”) routing and AODV+PG routing is an illustrations of a reactive protocol¹¹⁶⁻¹²⁴.

- **AODV:** For MANETs, the AODV routing protocol was primarily created (mobile ad hoc networks). This protocol establishes pathways only when a node requests to send a packet, making it a reactive protocol.

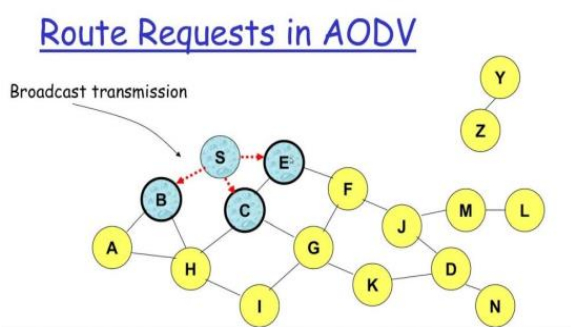


Fig. 7. A picture showing the operation of the AODV protocol

It employs conventional routing tables, an entry for every destination, and sequence numbers to gather up-to-date routing data. AODV saves the routes even though the source wants to transmit the information once a connection between the nodes is active (source-destination). In order to find the destination node, this protocol's main phase of route discovery sends RREQ (Route Request) packets from the input node to other nodes. RREPs (Route reply) packets are transmitted in unicast mode to the RREQ source. For information saving in the middle way molecules with the route in, the absolute path is formed. For preserving data in the middle way motes with the route in the local routing table, the absolute path is generated. Error messages (RERR) are also used to report following a communication failure. A new cycle of route-finding must start at this point. Always use "Hello" messages to determine and keep track of connectivity with adjacent nodes¹²⁵⁻¹³⁵

- **AODV+PG:** AODV+PGB uses Preferred Group Broadcast to reduce communication overhead (PGB). Compared to AODV, it offers more persistent routing. Since this protocol is designed to reduce the significant communication cost caused by the AODV route discovery cycle, PGB receivers can determine whether they are a member of an ideal group and which node in the set wants to talk. The communication's RS (Received Signal)

is used to determine the node.

- e. **Hybrid Routing:** Hybrid routing, as suggested by its name, combines proactive and reactive routing protocols. The protocols in this category are designed to shorten the time it takes to find a route from one place to another. This category includes protocols like ZRP and ZHLS.

- **ZRP:** ZRP uses both the reactive routing technique and the active routing approach in the vicinity of a node when communication between neighboring nodes is required. IARP (“Intra-zone routing protocol”) is utilized if communication with nearby neighborhoods needs to be established. In another situation, IERP is employed when communication between zones needs to be established¹³⁶⁻¹⁴³. Therefore, reactive routing seeks to find routes as per demand when it's necessary to ensure communications to other places, whereas proactive routing is used to give routes within an area or neighborhood.
- **ZHLS:** ZHLS is an additional routing protocol in this group of protocols. ZHLS makes use of node position information to divide the network into non-overlapping zones. Each node in this protocol is aware of the connectedness of its area in the network as well as the nodes that are close by. Information on the connectivity of the zones and the nodes' information is broadcast throughout the network. In light of this, the route can be established using the IDs of the node and the zone¹⁴⁴⁻¹⁵⁸.

II. Position Based Routing Protocols

These protocols use several sources, like maps and the Global Positioning System, to determine the position or location of the vehicles (GPS). As a result, in order to send and receive messages, the source and destination depend on the nodes' status information. This group of protocols does not require the upkeep of topology, route preservation, or discovering information. Therefore, location and packet forwarding are the two main aspects of transferred packets¹⁵⁹⁻¹⁶⁷. Two typical instances of this family of protocols are GPSR (“Greedy Perimeter Stateless Routing”) and RIPR (“Reliability Improving Position-based Routing”).

- a. **GPSR:** The GPSR routing technology works well in wireless and mobile networks. This protocol takes into account geographic routing factors. In order to forward data, GPSR uses two methods: perimeter forwarding and greedy forwarding.

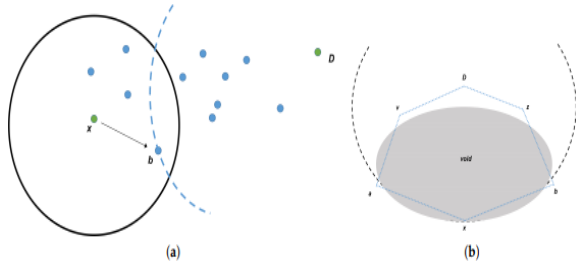


Fig. 8. shows the operation of GPSR (a) A case of greedy forwarding. The nearest neighbor of x to D is b . (b) Node x is void with regard to destination D in perimeter mode.

The second method is used when greedy forwarding is not an option (there is no nearby node other than the present one; see Figure 8b). The first algorithm passes the packet to the nearest neighbor node of the destination and is used by default (see Fig. 8a). The right-hand rule can be used by GPSR to transport packets around holes where there is no nearest neighbour thanks to the perimeter mode. This protocol does not need the development of a complete point-to-point path; instead, it bases decisions on the hop-by-hop principle.¹⁶⁸⁻¹⁷⁴⁾

- b. **RIPR:** RIPR was created to offer a fix for several link failures. This protocol establishes the direction and speed of a vehicle's motion. The neighbor's position and speed are then recorded in a routing table that is kept up to date by each node. As a result, according to the data contained in its table, the source node chooses the closest neighbor until it obtains the destination. Because of this, the strategy used to choose the next hop node aids in making better decisions for other midway nodes that are needed in additional hops as positions. This protocol also takes mobility speed into account.

III. Protocols for Cluster-Based Routing

These protocols are intended to group the nodes of the network into clusters. As a result, a cluster of close-by nodes is formed, with one vehicle acting as the cluster leader. The cluster's size varies depending on the techniques employed to create it. To put it another way, the network can be divided into clusters using certain factors such as the quantity of cars, their location concerning other vehicles, or their direction and speed of travel. The cluster's nodes then elect a Cluster Head (CH), who is responsible for overseeing the cluster and enabling inter-cluster communication. As a result, in inter-cluster communication, the data is forwarded to the best neighbor cluster¹⁷⁵⁻¹⁸⁰⁾.

- a. **Location-Cluster-based Flooding Routing Algorithm:** This protocol separates the network's nodes into clusters. Then, a cluster head will be in charge of coordinating communication between each cluster and its fellow cluster chiefs.

Additionally, the cluster heads broadcast beacon signals regularly to update their parameters. Additionally, in order to collect location data for other clusters, cluster headers transmit location request packets. Mentioning the reactive nature of this routing system, which was created to facilitate V2V communication.

IV. Protocols for Broadcast Routing

Traditional approaches for information routing across VANETs are described as relying on broadcast routing techniques that rely on flooding. These protocols are used to exchange information on the condition of the roads and emergency circumstances with vehicles that are outside the source node's communication range. In every condition, every network node receives and transmits packets¹⁸¹⁻¹⁹⁰⁾.

- a. **BROADCOMM:** Cells are created in the area using this approach. The cell reflector is then chosen by each member of the cell. The cell reflector consequently gathers messages from adjacent nodes. To put it simply, the cell reflector will serve as the cell's base station for all other nodes. Messages will therefore be transmitted to other vehicular nodes inside the cell by a cell reflector¹⁹¹⁻¹⁹⁴⁾.

V. Geo-Cast Routing Protocols

This family of routing protocols relies on forwarding or transmitting data in a location that is suitable for or related to the data that has to be sent. The vehicles that get the geocast message are in the Zone of Relevance (ZOR), and position-based multicast is utilized to transmit the packets to that ZOR. In other words, the Geo-cast Routing Protocol distributes data packets that originate from a single source node to every node that is present in the relevant area. A major flaw in these protocols is network partitioning, which interferes with the timely transmission of messages.

- a. **Robust Vehicular Routing (ROVER) protocol:** Control packets are transmitted using this protocol's flooding technique. Unicast, on the other hand, is used to transmit data messages. The network is divided into important parts by this protocol. After then, a vehicle will only take a message if it is received while it is in that location¹⁹⁶⁻²⁰⁰⁾.

5. Literature Review

- a. **Bio-Inspired Routing Protocol in VANET**

*Raghu Ramamoorthy et.al (2022)*³²⁾ Proposed Due to rapid mobility and topology changes, VANET communication lines between vehicles are prone to frequent failures. In order to provide dependable communication in this circumstance, this work provides an EBIRA ("Enhanced Bio-Inspired Routing Algorithm").

In EBIRA, the optimum short-distance routes with the fewest hops are found using improved ant colony optimization (EACO), which is based on distance, received signal intensity metrics, hop count, and evaporation rate. The selected path in EBIRA is short and has a high level of link-level connection with few hops. Simulation results show that EBIRA outperforms road-aware geographic routing protocol and RDACO ("Reliable Route Discovery Using Ant Colony Optimization") in terms of packet delivery ratio, throughput, and latency (RAGR). Along with fluctuations in the received signal strength dependent on vehicle density and speed, the EBIRA route discovery success ratio is also evaluated and shown in relation to vehicle density and speed.

Shubham Soni et. al (2022)³³⁾ proposed With less time, the developed approach enhanced throughput, packet size, and overhead. The testing results confirmed that, compared to other algorithms in the simulation, the created algorithm offered greater packet size and throughput and lower latency and overhead.

Ali Hashim Abbas et. al. (2021)³⁴⁾ Due to the network's extremely high dynamic mobility on the highways, network efficiency must be increased. An efficient routing protocol is necessary to ensure that the vehicles arrive at their destination in the possible time.

A. Gopalakrishnan, et.al (2020)³⁵⁾ proposed a Bio-inspired Routing Protocol to look into the best gateway and sink for routing the service request between the service requester and the global server. The gateway choice concentrated on encouraging just the legitimate source to communicate with the sink. The networking nodes were given efficient routing. The VANET sources used SDN (software-defined networking) to stabilize the networking topologies.

Hao Liu, et al. (2020)³⁶⁾ proposed a PASRP for emergency data in urban VANET. A computerized map and geographic information system were used to create a parking lot-based spider-web transmission system. The emergency information was then broadcast on the chosen channel using a multi-mode greedy algorithm. The data were prioritized using a dynamic multi-priority scheduling approach. Finally, the simulation outcomes showed that the recommended methodology outperformed more established techniques.

Bhushan Yelure et al. (2020)³⁷⁾ developed a PSOR routing method based on PSO for the VANET, which enhanced QoS (Quality of Service). Using the particle's velocity and position, the best overall solution based on fitness value was validated. Using this technique, the next vehicle that would be accessible close to the Destination vehicle was selected. The message was transmitted using the carry and

forward mechanism. The testing results confirmed that, compared to other algorithms in the simulation, the created algorithm offered greater packet size and throughput and lower latency and overhead.

Daxin Tian, et al. (2018)³⁸⁾ proposed cellular attractor selection was used to select the following hops in a bio-inspired URAS for VANET. The importance of adapting to its complex and dynamic environment was stressed by this algorithm. Additionally, when choosing the next hop utilizing a multi-attribute decision-making process, the number of duplicate candidates decreased. The simulation results demonstrated that in terms of PDR (Packet Delivery Ratio), E2E (End-to-End Latency), and congestion, the suggested solution performed better than the current strategy.

b. Clustering-based Routing Protocol in VANET

Mohammad Sadegh Azhdari et.al (2022)³⁹⁾ proposed Due to its characteristics, such as a high degree of node mobility and erratic wireless communication links, vehicular ad hoc networks present a challenge for routing. As a result, it makes for an intriguing research topic. Additionally, because of the above-mentioned characteristics of these networks, it is crucial to create an authentication method between the source node and the destination node. In this paper, we describe an authentication-capable fuzzy logic-based routing approach for automotive ad hoc networks. Three parts make up the suggested routing technique: clustering, routing between cluster head nodes, and authentication. Vehicles are clustered in the first stage utilizing an effective method. We distinguish between immediate and regular data packets in the suggested technique.

Viswanathan Ramasamy et. al (2021) devised a "Position Particle Swarm Optimization with Fuzzy Logic (PPSO-FL)" technique for VANETs, relying on collectively coordinated measures rather than instantaneous velocity

Wenxiao Dong et al. (2017)⁴¹⁾ proposed a CRB ("cluster-based recursive broadcast") routing system as a remedy for the issues with delay time and delivery ratio. Only the selected vehicles were capable of transmitting the received emergency event to other vehicles nearby. The recommended approach helped enhance the message's efficacy of transmission and delivering the directed broadcast based on the traffic light situation. Tests conducted on NS2 revealed that the proposed technique outperformed previous algorithms.

Khalid Kandali et al. (2020)⁴²⁾ presented an RPKHM to lengthen the links between automobiles and boost the stability of the vehicular network ("Routing protocol employing an adaptive K-Harmonic Means"). A mathematical model was put into practice to determine the number and initial placements of the centroids while

taking into account the network's topology and the overall number of cars. On the other hand, a similarity value based on Euclidean distance was used to group the data. The clusters were ultimately preserved, and new cluster heads were selected using a cost function that considered the total amount of free buffer and ETX ("Expected transmission count"). The simulation's findings demonstrated the proposed protocol's effectiveness in terms of throughput, average E2E time, and PDR.

Parisa Saraj Hamedani, et al. (2018)⁴³⁾ suggested a dependable cluster-based two-layer approach to address the connection failure issues in VANETs. While the second level used a greedy algorithm to choose the shortest path, the first level chose the reliable link. Instead of using more traditional approaches, the NS-2.35 was used to stimulate the ideal algorithm based on network characteristics such as E2E latency and PDR. PDR and E2E latency were both improved by using this technique.

Waqar Farooq et al. (2017)⁴⁴⁾ developed a AAGVs routing algorithm that made use of aerial vehicles to address the communication issues with AGVs and spread MDMs (Mines Detection Messages). Additionally, a cluster-based system was created to allow for the real-time adaption of the established algorithm without affecting its performance. In order to accomplish this, reliable IVC ("Inter-Vehicular Communication") linkages were kept up. The established method was stimulated using the Network Simulator. The findings showed that the established algorithm helped reduce latency and overhead while increasing PDR and throughput using a multicast communication approach.

Salim Bitam et al. (2015)⁴⁵⁾ Their Model has increased traffic safety and facilitated passenger comfort. Security and privacy concerns have not been given any thought in their model.

c. Traffic Aware Routing Protocol in VANET

Maryam Gillani et al. (2022)⁴⁶⁾ proposed the study of VANETs is a tough but active field. It offers a wide range of applications, such as Intelligent Transport System (ITS), efficient traffic flow, effective road traffic monitoring, and applications for road safety. The fixed silence segments interfere with effective communication while real-time data is being gathered for emergency circumstances. Furthermore, this issue can cause crucial ITS operations to be delayed. In order to address communication constraints, the Real-Time Traffic-Aware Data Gathering Protocol (TDG) proposed in this study uses dynamic segmentation switching. To gather and send data packets based on the present and rapidly changing traffic conditions, TDG is a lightweight, dynamic system. To accommodate real-time data collecting time limits, the main goal is to reduce network and data transfer overhead.

Yida He et al. (2021)⁴⁷⁾ It is a particularly difficult task to design an effective routing protocol for urban VANETs due to their unique characteristics. The Q-learning algorithm, which consists of various strategies for forwarding data packets within roads and intersections.

Satheshkumar Kandasamy et al. (2021)⁴⁸⁾ VANET has drawn a lot of attention due to its distinct abilities to manage a high level of vehicle mobility, major topological changes, and experiencing frequent route failures or breaks.

Forough Goudarzi, et al.⁴⁹⁾ created a vehicular ad hoc network (VANET) routing method for urban regions that takes traffic into account (2018). An ant-based technique was utilized to locate a path that had network connectivity. By comparing the route on a street map with the least amount of weight for the entire journey when utilizing a source vehicle, the best path between a source and a destination was found. The simulated environment was taken into account to determine the precise functionality of the proposed protocol. The simulation findings demonstrate that at speeds up to 70 km/h, the proposed technique was able to decrease overhead and E2E (end-to-end) time while enhancing PDR (packet delivery ratio) by 10%.

Rui Wu et al. (2019)⁵⁰⁾ proposed In a GeoTAR, a map-based and traffic-aware routing algorithm, traffic data was gathered and the optimum route was determined using a digital map and a Geohash coding method. In addition, packets for which buildings were regarded as radio barriers were sent using the restricted forwarding technique known as IFRF (intersection-first restricted forwarding). The routing path was determined by taking into consideration the wired channel present in the RSUs (Roadside Units). The simulation results demonstrated that the recommended method was successful in enhancing VANET performance in terms of PDR and E2E delay when compared to other protocols.

Jinqiao Wu et al. (2020)⁵¹⁾ looked into a new routing algorithm dubbed QTAR ("Q-learning-based Traffic-Aware Routing") based on RSU for urban VANETs. A routing path was used to choose the trustworthy connection road segments so that the packets could be sent effectively. In order to reduce latency and the impact of swift vehicle movements on path sensitivity, the packet was broadcast in a road section using distributed V2V Q-learning combined with QGGF. In order to broadcast the packet at each intermediate intersection, distributed R2R Q-learning was introduced. The testing results demonstrated that the analyzed method outperformed the standard processes in terms of average and least average E2E (end-to-end) delays.

*Sadia Din et al. (2020)*⁵²⁾ developed the BTA-GRP (Geographical Routing Protocol with Beaconless Traffic-Aware), which chose the next forwarder node and the route taking into account traffic density, distance, and direction. Given that the topology was dynamic, a novel routing method was intended to address a variety of problems, including the disconnectivity in metropolitan regions. This approach could be used to shorten the wait time and increase throughput. The simulation's findings verified that the proposed protocol worked well in VANETs.

d. Geographic Routing Based Protocol for Routing in VANET

*O. Alzamzami, et.al (2021)*⁵³⁾ presented a cross-layer framework of LDB (link dynamic behavior). Considering LDB, an extended version of geographic routing known as Geo-CAP algorithm was developed for urban VANETs (Vehicular ad hoc Network). More truthful links were selected, and varying nodes and network conditions were considered to provide higher gains for which packet loss and delay was mitigated. NS-3 was applied for quantifying the developed algorithm in the experimentation. The results indicated that the developed algorithm was effective with regard to PDR (packet delivery rate), throughput and E2E (end-to-end) delay.

*P. Singh, et.al (2022)*⁵⁴⁾ projected a W-GeoR (Weighted Geographical Routing) algorithm for applications of health monitoring in VANET (Vehicular ad hoc Network) to select next-hop node so that the crucial signs were disseminated to monitor post-disaster health in urban traffic environments. The next-hop node was selected using the traffic aware information related to traffic mobility, inter-vehicle distances, speed differences, communicating link expiration time, channel quality, and proximity factors. SUMO-0.32 and NS-3.23 platforms executed to test the projected algorithm on a post-disaster scenario. The simulated results exhibited the supremacy of the projected algorithm concerning the number of path breaks, lost packets, throughput, PDR (packet delivery ratio), delay, and mean hop count.

reliable route, and to introduce a novel logic so that the intermediate nodes were selected to the destination for enhancing PDR (Packet Delivery Ratio). The suggested protocol was applicable to increase PDR up to 18.46%, lessen the E2E (end-to-end) delay up to 10.51% and energy utilization up to 23.80% while transmitting the data.

*G. D. Singh, et.al (2022)*⁵⁸⁾ projected an HGFA (Hybrid Genetic Firefly Algorithm)-based routing algorithm to establish a communication in VANET (Vehicular ad hoc Network) quickly. This algorithm focused on integrating the attributes of GA (Genetic Algorithm) with attributes of FA (Firefly algorithm), and utilizing them in routing for sparse and dense network scenarios. The behavior of

*S. Jiang, et.al (2021)*⁵⁵⁾ suggested an adaptive UAV (unmanned aerial vehicle) based GRQL (geographic routing with Q-Learning). There were 2 components: aerial and ground. The initial component deployed a FL (Fuzzy Logic) and DFS (Depth First Search) algorithm based on UAV-collected information like the global road traffic for computing the global routing path, and transmitting this information to the ground requesting vehicle. The latter one utilized a vehicle for maintaining a fix-sized Q-table converged with a reward function and forwarding the routing request to the optimal node. For this, Q-table filtered was considered in accordance with the global routing path. The simulation outcomes confirmed that the suggested algorithm was applicable to enhance PDR (packet delivery ratio) and E2E (end-to-end) delay.

*S. A. Rashid, et.al (2022)*⁵⁶⁾ intended an innovative model called RAMO (Reliability Aware Multi-Objective Optimization) to perform routing in VANETs. Besides, an optimization block adopted for controlling the metrics of every block. Moreover, an EGMHS (Enhanced Gaussian Mutation Harmony Searching) algorithm was put forward on the basis of Gaussian mutation, objective decomposition and a harmony memory extraction algorithm. The mathematical functions and network simulator were executed to compute both the algorithms. The experimental results demonstrated that the intended model was more robust in comparison with other methods with regard to delta metric, hyper-volume, PDR (packet delivery ratio) and E2E (end-to-end) delay.

e. General Protocols for Routing in VANET

*M. K. Diaa, et.al (2022)*⁵⁷⁾ suggested an OPBRP (Obstacle Prediction Based Routing Protocol) in order to detect vehicles, transmit the packets to RSU (Roadside Units) and select an optimal route reliably. For this, Kinematics and Mobility of vehicle was predicted in VANET (Vehicular ad hoc Network). The major objective of this work was to upgrade the predictive routing algorithm for transmitting the packets through a

fireflies was considered for accomplishing the task and coordinating with other nodes. A novel OF (Objective Function) was constructed using the attributes of GA. The experimental results indicated that the projected algorithm offered an accuracy of 0.77% and 0.74% against FF algorithm and 0.55% and 0.42% against PSO (Particle Swarm Optimization) technique in both scenarios respectively.

*S. Zhou, et.al (2021)*⁵⁹⁾ investigated a MIS (multiple intersection selection) routing algorithm planned on the basis of road section connectivity probability to establish V2V (vehicle-vehicle) communication in urban VANETs (Vehicular ad hoc Network). The traffic lights considered to distribute the vehicle. Primarily, a technique

was put forward for computing the road section connectivity probability of a two-way lane with regard to traffic lights. Subsequently, an optimization technique was implemented for choosing the optimal road route amid source and destination node. Eventually, an analysis was

performed on selecting the relay node on the road section after verifying the optimal road path. The simulation results reported that the investigated algorithm was performed well with regard to PDR (packet delivery rate) and E2E (end-to-end) delay.

Table 1

| AUTHOR NAME | YEAR | TECHNIQUE | DATA-SET | FINDINGS |
|--|------|--|------------|--|
| <u>BIO-INSPIRED ROUTING PROTOCOL VANET</u> | | | | |
| Raghu Ramamoorthy et. al.[32] | 2022 | “Enhanced Bio-Inspired Routing Algorithm (EBIRA)” | NS2 | “According to the simulation results, EBIRA performs better than RDACO and RAGR in terms of throughput, latency, and packet delivery ratio”. |
| Shubham Soni et. Al[33] | 2022 | “Routing protocol PSOR” | NS3 | With less time, the developed approach enhanced throughput, packet size, and overhead. |
| Ali Hashim Abbas et. al.[34] | 2021 | “A Cross-Layer Approach MAC/NET with Updated-GA (MNUG-CLA)” | NS2 | Due to the network's extremely high dynamic mobility on the highways, network efficiency must be increased. An efficient routing protocol is necessary to ensure that the vehicles arrive at their destination in the possible time. |
| A. Gopalakrishnan, et. al.[35] | 2020 | “Protocol for Bio inspired Routing” | NS2 | The networking topologies in the VANET are stabilized by the SDN. |
| Hao Liu, et al. [36] | 2020 | “Protocol for spider-web routing facilitated by parking areas” | NS2 | The recommended protocol outperformed more established methods in terms of performance. |
| “Bhushan Yelure, et al.”[37] | 2020 | “Routing protocol PSOR” | NS2 | The created algorithm offered improved throughput, packet size, and overhead with less time. |
| “Daxin Tian, et al.”[38] | 2018 | “Protocol for unicast routing based on attractor selection (URAS)” | MATLAB | Regarding PDR, E2E latency, and congestion, the projected strategy was reliable and effective. |
| <u>CLUSTERING BASED ROUTING PROTOCOL IN VANET</u> | | | | |
| “Mohammad Sadegh Azhdari et.al”[39] | 2022 | “Fuzzy Logic” | NS2 | We evaluated the performance of our proposed technique using E2E delay, packet collision, packet delivery rate (PDR), routing overhead, throughput, and packet loss rate (PLR). |
| “Viswanathan Ramasamy et. al”[40] | 2021 | “Fuzzy Logic” | VNODA, LLA | Devised a “Position Particle Swarm Optimization with Fuzzy Logic (PPSO-FL)” technique for VANETs, relying on collectively coordinated measures rather than instantaneous velocity |

| | | | | |
|--|------|---|--------------------|--|
| “Khalid Kandali, et al.”[42] | 2020 | “Routing protocol using an adaptive K-Harmonic Means (RPKHM)” | NS2 | Regarding PDR, average E2E time, and throughput, the proposed protocol was efficient. |
| “Parisa Saraj Hamedani, et al.”[43] | 2018 | “Algorithm for two-layer cluster-based routing” | NS-2.35 | By using this technique, the PDR was increased and the E2E delay was decreased. |
| “Wenxiao Dong, et al.”[41] | 2017 | “Cluster-based recursive broadcast (CRB)” | NS2 | With regard to delivery ratio and delay time, this algorithm worked well. |
| “Waqar Farooq, et al.”[44] | 2017 | “Autonomous Aerial and Ground Vehicles (AAGVs) routing protocol” | NS2, NS3 | The established algorithm helped to increase the PDR and throughput while reducing the latency and overhead. |
| “Salim Bitam et al.”[45] | 2015 | “Generic Cloud Computing Model” | NS2 | Their Model has increased traffic safety and facilitated passenger comfort. Security and privacy concerns have not been given any thought in their model. |
| <u>TRAFFIC AWARE ROUTING PROTOCOL VANET</u> | | | | |
| “Maryam Gillani et al.”[46] | 2022 | “Real-time CH election (R-CHE) algorithm” | NS-2.35 | Using NS-2.35 on Ubuntu, we ran extensive simulations to verify our findings. In this instance, the network deployment and message initiation are done using TCL. |
| “Yida He et al.”[47] | 2021 | “Intersection-based Traffic-Aware Routing with Fuzzy Q-learning for Urban VANETs” | ITAR-FQ | “It is a particularly difficult task to design an effective routing protocol for urban VANETs due to their unique characteristics. The Q-learning algorithm, which consists of various strategies for forwarding data packets within roads and intersections”. |
| “Satheshkumar Kandasamy et al.”[48] | 2021 | “A smart transportation system in VANET based on vehicle geographical tracking and balanced routing protocol” | NS 2.34 | VANET has drawn a lot of attention due to its distinct abilities to manage a high level of vehicle mobility, major topological changes, and experiencing frequent route failures or breaks. |
| “Jinqiao Wu, et al.”[51] | 2020 | “Traffic-Aware Routing based on Q-Learning with RSU assistance (QTAR)” | QualNet | With relation to the average and least average E2E delay, the researched method performed better. |
| “Sadia Din, et al.”[52] | 2020 | “Geographical Routing Protocol With Beaconless Traffic-Aware (BTA-GRP)” | NS2.34 simulator | This approach could be used to shorten the wait time and increase throughput. |
| “Rui Wu, et al.”[50] | 2019 | “GeoTAR” | NS3 | PDR and E2E delay performance on the VANET were effectively improved by the suggested strategy. |
| “Forough Goudarzi, et al.”[49] | 2018 | “Position-based routing protocol with traffic” | OMNeT++, SUMO, and | At speeds up to 70 km/h, the developed method was able to reduce the overhead and E2E time while |

| | | | | |
|--|------|---|--|--|
| al.”[49] | | awareness” | VACO | increasing the PDR by 10% above. |
| <u>GEOGRAPHIC ROUTING BASED PROTOCOL FOR ROUTING IN VANET</u> | | | | |
| P. Singh, et.al[54] | 2022 | W-GeoR (Weighted Geographical Routing) | NETSIM,NS2 | The simulated results exhibited the supremacy of the projected algorithm concerning the number of path breaks, lost packets, throughput, PDR (packet delivery ratio), delay, and mean hop count. |
| S. A. Rashid, et.al[56] | 2022 | RAMO (Reliability Aware Multi-Objective Optimization) | OMNeT++, NS3 | The experimental results demonstrated that the intended model was more robust in comparison with other methods with regard to delta metric, hypervolume, PDR (packet delivery ratio) and E2E (end-to-end) delay. |
| O. Alzamzami, et.al[53] | 2021 | Geo-CAP algorithm | V2X Simulation Runtime Infrastructure (VSimRTI), OMNeT++ | The results indicated that the developed algorithm was effective with regard to PDR (packet delivery rate), throughput and E2E (end-to-end) delay. |
| S. Jiang, et.al[55] | 2021 | An adaptive UAV (unmanned aerial vehicle) based GRQL (geographic routing with Q-Learning) | SUMO | The simulation outcomes confirmed that the suggested algorithm was applicable to enhance PDR (packet delivery ratio) and E2E (end-to-end) delay. |
| <u>GENERAL PROTOCOLS FOR ROUTING IN VANET</u> | | | | |
| M. K. Diaa, et.al[57] | 2022 | OPBRP (Obstacle Prediction Based Routing Protocol) | NS3 | The suggested protocol was applicable to increase PDR up to 18.46%, lessen the E2E (end-to-end) delay up to 10.51% and energy utilization up to 23.80% while transmitting the data. |
| G. D. Singh, et.al[58] | 2022 | HGFA (Hybrid Genetic Firefly Algorithm)-based routing algorithm | NS3,SUMO | The experimental results indicated that the projected algorithm offered accuracy of 0.77% and 0.74% against FF algorithm and 0.55% and 0.42% against PSO (Particle Swarm Optimization) technique in both scenarios respectively. |
| S. Zhou, et.al[59] | 2021 | A multiple intersection selection routing algorithm | NS2 | The simulation results reported that the investigated algorithm was performed well with regard to PDR (packet delivery rate) and E2E (end-to-end) delay. |

Comparison Table 1

| Routing Protocol | Network Type | Network Architecture | Routing Approach | Mobility Model | Key Feature | Advantages | Disadvantage |
|--|---|----------------------|--------------------|-----------------------------------|--|--|---|
| General Routing Protocol | Infrastructure Based or Infrastructure Less | Ad-hoc or Hybrid | Traditional | Random Waypoint | Uses traditional routing algorithm such as AODV, DSR or DSDV | Can support both ad-hoc and infrastructure-based communication | Can Suffer from high overhead due to frequent broadcast |
| Bio-Inspired Routing Protocol | Infrastructure Less | Ad-hoc | Swarm Intelligence | Random Waypoint or Manhattan Grid | Uses Swarm Intelligence to optimize routing decision | Can adapt to dynamic changes in network topology | May require more time to converge |
| Traffic Aware Routing Protocol | Infrastructure Less | Ad-hoc or Hybrid | Traffic Aware | Random Waypoint or Urban Grid | Consider traffic patterns and congestion levels when making routing decision | Improves network throughput and reduces delays | May require additional information to be exchanged |
| Geographic Routing Protocol | Infrastructure Less | Ad-hoc | Geographic | Random Waypoint or Manhattan Grid | Uses geographic location of vehicle to determine routing paths | Can improve network scalability and performance | Can be affected by mobility patterns of vehicles |
| Clustering Based Routing Protocol | Infrastructure Less | Ad-hoc | Clustering | Random Waypoint or Manhattan Grid | Divides network into cluster to reduce overhead and also increase stability | Can provide efficient routing and resource management | May require additional overhead for cluster formation and maintenance |

Comparison Table 2

| Routing Protocol | Security | Data Aggregation | Energy Efficiency | Routing Stability | QOS Support | Scalability |
|--|--|------------------|-------------------|-------------------|-------------|-------------|
| General Routing Protocol | Vulnerable To Security Attacks | No | Yes | Low | Limited | Good |
| Bio-Inspired Routing Protocol | Susceptible To Security Attacks | Yes | Yes | High | Limited | Limited |
| Traffic Aware Routing Protocol | May be Susceptible to Security Attacks | Yes | No | Medium | Good | Limited |
| Geographic Routing Protocol | Vulnerable To Security Attacks | No | Yes | High | Limited | Good |
| Clustering Based Routing Protocol | Susceptible To Attacks Targeting Cluster Heads | Yes | Yes | Medium | Limited | Good |

6. Findings discovered from reviewing existing literature sources

This paper includes a methodical literature evaluation to ensure future replication of this survey. The findings discovered from reviewing existing literature sources are as follows:

- The goal of this effort is to condense the knowledge of routing protocols based on various criteria for VANET to make optimal routing decisions.
- By categorizing, ranking, and making the research on a particular study question, field, topic, or phenomenon of interest available.
- This survey is beneficial for VANET researchers who are creating new emergency and data-interchange-specific amenities and require a robust routing mechanism to generate reliable results.
- The goal of this work is to improve hop-to-hop decisions made by multi-parameter routing systems in vehicular communications (that typically use a single metric for routing decisions).

This review's findings support the claim that using different metrics in routing protocols improves the ability of vehicular communication to make decisions.

7. Conclusion

VANETs are an integral part of ITS (Intelligent Transportation System) based communication infrastructure. Therefore, over the past twenty years, they

have been broadly analyzed from both industrial and academic perspectives. New generation vehicles are expected to be deployed with cutting-edge OBUs (onboard units), diverse communication technologies as well as fresh sensor paradigms. VANETs use vehicle-to-vehicle communication to deliver important information to drivers. VANETs make a substantial contribution to assuring their minimal dependence on static infrastructure routing because of their dispersed and self-configuring nature. This article highlights some of the earlier suggested routing protocols specifically for VANETs and examines the significance of establishing routing protocols for them. This article emphasizes the significance of these measurements in predicting the behavior of vehicular networks and focuses in particular on ideas that employ several indications to determine the most appropriate course of action. The characteristics of reactive and proactive routing protocols are presented in this study, together with the method used to evaluate them, such as the year of publication, the area under consideration, and the metrics used (i.e., simulators and mobility generators). This paper concludes that link stability, location, density, and speed are particularly advantageous properties in routing protocols for VANETs due to geographic limits. However, the mobility model has a significant impact on how well routing protocols perform in a network of vehicles. This work additionally takes into account additional measurements like direction, trajectory, and acceleration. These measurements are effective and appropriate for network dynamics. In order to meet the demands of VANETs, creating explicit routing protocols

and taking into account the mobility model are required. Although the wireless network industry has shown a lot of interest in routing in VANETs, several difficulties have not yet been thoroughly investigated. Artificial intelligence and communicative trust are two new guidelines for the VANET routing protocol. In order to conduct a thorough examination of VANET performance, future work will involve gathering information on VANET routing protocols mentioned in the literature.

References

- 1) M. Mathiane, P. A. Owola, & M. C. Naweji. "A SUMO Simulation Study on VANET-Based Adaptive Traffic Light Control System". *In Advances in Electrical and Computer Technologies*, vol. 24, pp. 225-237, (2022). https://doi.org/10.1007/978-981-19-1111-8_19
- 2) Sergio M. Tornell; Carlos T. Calafate; Juan-Carlos Cano; Pietro Manzoni, "DTN Protocols for Vehicular Networks: An Application Oriented Overview", *IEEE Communications Surveys & Tutorials*, vol. 17, pp. 868 – 887, (2015).
- 3) Mani Amoozadeh; Arun Raghuramu; Chen-nee Chuah; Dipak Ghosal; H. Michael Zhang, "Security vulnerabilities of connected vehicle streams and their impact on cooperative driving", *IEEE Communications Magazine*, vol. 53, pp. 126 – 132, (2015)
- 4) Palak. Shandil and Rakesh Kumar, "Security Analysis of Vehicular Ad Hoc Network," *International Conference on Circuits and Systems in Digital Enterprise Technology (ICCSDET)*, Vol. 6, pp. 1-5, doi: 10.1109/ICCSDET.2018.8821137.
- 5) Hao Hu, Rongxing Lu, Zonghua Zhang, Jun Shao, REPLACE: A Reliable Trust-Based Platoon Service Recommendation Scheme in VANET, *IEEE Transactions on Vehicular Technology*, vol. 66, pp. 1786 – 1797, (2016).
- 6) Shiang-Feng Tzeng, Shi-Jinn Horng, Tianrui Li, Xian Wang, Po-Hsian Huang, "Enhancing, Security and Privacy for Identity-Based Batch Verification Scheme in VANETs", *IEEE Transactions on Vehicular Technology*, vol 66, pp. 3235 – 3248, (2015).
- 7) Dief, Tarek N, Yoshida, Shigeo, "System Identification for Quad-rotor Parameters Using Neural Network", *Evergreen*, 3 (1), pp.6-11, (2016).
- 8) Jun Zhou, Xiaolei Dong, Zhenfu Cao, Athanasios V. Vasilakos, "Secure and Privacy Preserving Protocol for Cloud-Based Vehicular DTNs", *IEEE Transactions on Information Forensics and Security*, vol. 10, pp. 1299 – 1314, 2015.
- 9) P. Shandil, & R. Kumar, "A Novel Scheme for Isolation of Distributed Denial of Service Attack in VANETs". *International Journal of Computer Network & Information Security*, II(4), (2019).
- 10) Wenjia Li, Houbing Song, "ART: An Attack-Resistant Trust Management Scheme for Securing Vehicular Ad Hoc Networks" *IEEE Transactions on Intelligent Transportation Systems*, vol 17, pp. 960 – 969, (2015).
- 11) Mohamed Nidhal Mejri, Jalel Ben-Othman, Mohamed Hamdi "Survey on VANET security challenges and possible cryptographic solutions", vol.1, pp 53-66, (2014).
- 12) Hamssa Hasrouny, AbedEllatif Samhat, Carole Bas sil, "Vanet security challenges and solutions: A survey", *Computer Communications*, vol. 7. Pp. 7-20, (2017)
- 13) Mohammed Ali Berawi, Sutan Akbar Onggar Siahaan, Gunawan, Miraj, Perdana "Determining the Prioritized Victim of Earthquake Disaster Using Fuzzy Logic and Decision Tree Approach" *Evergreen*, 7 (2), pp.246-252, (2020).
- 14) Jitendra Bhati^a Ridham Dave^a Heta Bhayani^a Sudeep Tanwar^b Anand Nayyar, "SDN-based real-time urban traffic analysis in VANET environment", *Computer Communications*, vol. 149, Pages 162-175, (2020).
- 15) Ryan Imansyah, "Impact of Internet Penetration for the Economic Growth of Indonesia," *EVERGREEN Joint Journal of Novel Carbon Resource Sciences & Green Asia Strategy*, 5(2) 36-43 (2018).
- 16) Moez Jerbi, Rabah Meraihi, Sidi Mohammed Senouci, "GyTAR: improved greedy traffic aware environments", *Proceedings of the 3rd international workshop on Vehicular ad hoc networks*, pp 89-90, (2006).
- 17) Richard Gilles Engoulou, Martine Bellaïche, Samuel Pierre, Alejandro Quintero, "VANET security surveys", *Computer Communications*, vol.-44, pp. 1-13, (2014).
- 18) Yiliang Liu; Liangmin Wang; Hsiao-Hwa Chen, "Message Authentication Using Proxy Vehicles in Vehicular Ad Hoc Networks", *IEEE Transactions on Vehicular Technology*, vol. 64, pp. 3697 – 3710, (2014).
- 19) P. Tungjirattitikan, "Accidents in thai industry between 2001 and 2017," *Evergreen*, 5 (2), pp. 86-92, (2018). doi:10.5109/1936221.
- 20) Fengzhong Qu; Zhihui Wu; Fei-Yue Wang; Woong Cho, "A Security and Privacy Review of VANETs", *IEEE Transactions on Computers*, vol. 16, pp. 2985 – 2996, (2015).
- 21) T.W. Chim, S.M. Yiu, "VSPN: VANET-Based Secure and Privacy-Preserving Navigation", *IEEE Transactions on Computers*, vol. 63, pp. 510-524, (2014).
- 22) Shilpa Choudhary, Abhishek Sharma, Kashish Srivastava, Hemant Purohit, Mudita Vats, "Read Range Optimization of Low Frequency RFID System in Hostile Environmental Conditions by Using RSM Approach," *EVERGREEN Joint Journal of Novel Carbon Resource Sciences & Green Asia*

- Strategy, **7(3)** 396-403 (2020).
- 23) Fengzhong Qu, Zhihui Wu, Fei-Yue Wang, Woong Cho, "A Security and Privacy Review of VANETs," *IEEE Transactions on Intelligent Transportation Systems*, **vol. 16**, pp. 2985 – 2996, (2015).
- 24) Nan Cheng, Feng Lyu, Jiayin Chen, Wenchao Xu, "Big Data Driven Vehicular Networks", *IEEE Network*, **vol. 32**, pp. 160 – 167, (2018).
- 25) Wenshuang Liang, Zhuorong Li "Vehicular Ad Hoc Networks: Architectures, Research Issues, Methodologies, Challenges, and Trends" **vol. 12**, pp. 5678-5698, (2015)
- 26) Zhaojun Lu; Gang Qu; Zhenglin Liu, "A Survey on Recent Advances in Vehicular Network Security, Trust, and Privacy", *IEEE Transactions on Intelligent Transportation Systems*, **vol: 20**, pp. 760 – 776, (2018).
- 27) D. Lin, J. Kang, A. Squicciarini, Y. Wu, S. Gurung and O. Tonguz, "MoZo: A Moving Zone Based Routing Protocol Using Pure V2V Communication in VANETs," in *IEEE Transactions on Mobile Computing*, **vol. 16**, no. 5, pp. 1357-1370, (2017).
- 28) Jiu Jun Cheng, JunLu Cheng, MengChu Zhou, FuQiang Liu, ShangCe Gao, Cong Liu, "Routing in Internet of Vehicles: A Review", *IEEE Communications Surveys*, **vol-16**, pp. 2339 - 2352, (2015).
- 29) Craig Cooper, Daniel Franklin, Montserrat Ros, Farzad Safaei, Mehran Abolhasan, "A Comparative Survey of VANET Clustering Techniques", *IEEE Communications Surveys & Tutorials*, **vol. 19**, pp. 657 – 681, (2017).
- 30) A. Abuashour and M. Kadoch, "Performance Improvement of Cluster-Based Routing Protocol in VANET," in *IEEE Access*, **vol. 5**, pp. 15354-15371, 2017.
- 31) Sooksan Panichpapiboon; Wasan Pattara-atikom, "A Review of Information Dissemination Protocols for Vehicular Ad Hoc Networks", *IEEE Communications Surveys & Tutorials*, **vol 14**, pp. 784 – 798, (2012).
- 32) Raghu Ramamoorthy and Menakadevi Thangavelu, "An Enhanced Bio-Inspired Routing Algorithm (EBIRA)", *Trends In Sciences 2022*, **vol.19**, pp. 1005-1024, (2022).
- 33) Shubham Soni, "Various Routing Protocols of Vehicular Ad hoc Network: A Survey", *Ijrasnet Journal For Research in Applied Science and Engineering Technology*, **Vol. 10**, pp121-150, 2022
- 34) Ali Hashim Abbas, Ahmed Jamal Ahmed and Sami Abduljabbar Rashid, "A Cross-Layer Approach MAC/NET with Updated-GA (MNUG-CLA)-Based Routing Protocol for VANET Network", *World Electr. Veh. J.*, **Vol. 13**, pp. 74-87, 2022
- 35) A. Gopalakrishnan, P. Manju Bala, T. Ananth Kumar, "An Advanced Bio-Inspired Shortest Path Routing Algorithm for SDN Controller over VANET", 2020, *International Conference on System, Computation, Automation and Networking (ICSCAN)*, **Vol. 11**, pp. 1-5. IEEE, (2020).
- 36) Hao Liu, Tie Qiu, Xiaobo Zhou, Chen Chen, Ning Chen, "Parking-Area-Assisted Spider-Web Routing Protocol for Emergency Data in Urban VANET", 2020, *IEEE Transactions on Vehicular Technology*, **Vol. 69**, pp. 971–982 (2019).
- 37) Bhushan Yelure, Shefali Sonavane, "Particle Swarm Optimization based Routing Method for Vehicular Ad-hoc Network", 2020, *International Conference on Communication and Signal Processing (ICCSP)*, **Vol-4**, pp. 2293 – 2303, (2018).
- 38) Daxin Tian, Kunxian Zheng, Jianshan Zhou, Xuting Duan, Yunpeng Wang, Zhengguo Sheng, Qiang Ni, "A Microbial Inspired Routing Protocol for VANETs", *IEEE Internet of Things Journal*, **Vol. 11**, pp. 2314-2341, (2018).
- 39) Mohammad Sadegh Azhdari, "A cluster-based routing method with authentication capability in Vehicular Ad hoc Networks (VANETs)", *Journal of Parallel and Distributed Computing*, **Vol. 9**, Pages 1-23 November (2020).
- 40) Viswanathan Ramasamy, Jagatheswari Srirangan, Praveen Ramalingam, Fuzzy and Position Particle Swarm Optimized Routing in VANET, *International Journal of Electrical and Computer Engineering Systems*, **Vol. 12**, Number 4, 2021
- 41) Wenxiao Dong, Fei Lin, Hongling Zhang, Yuping Yin, "A cluster-based recursive broadcast routing algorithm to propagate emergency messages in city VANETs", *IEEE 9th International Conference on Communication Software and Networks (ICCSN)*, **Vol. 11**, pp-12343-12367, (2017).
- 42) Khalid KANDALI, Hamid BENNIS, "A Routing Scheme Using an Adaptive K-Harmonic Means Clustering for VANETs", *International Conference on Intelligent Systems and Computer Vision (ISCV)* **vol-23**, pp. 3454-3489, (2020)
- 43) Parisa SarajHamedani, Arshin Rezazadeh, "A New Two Level Cluster-Based Routing Protocol for Vehicular Ad Hoc Network (VANET)", 2018, *UKSim-AMSS 20th International Conference on Computer Modelling and Simulation (UKSim)* **vol-34**, pp. 2158-1657, (2018).
- 44) Waqar Farooq, Muazzam A. Khan, Saad Rehman, Nazar Abbas Saqib, Muhammad Abbas, "AAGV: A Cluster Based Multicast Routing Protocol for Autonomous Aerial and Ground Vehicles Communication in VANET", *International Conference on Frontiers of Information Technology (FIT)*, **Vol. 5**, pp. 1-6, 2017
- 45) Salim Bitam, Mellouk, A., & Zeadally, S., VANET-cloud: a generic cloud computing model for vehicular Ad Hoc networks. *IEEE Wireless Communications*, **Vol. 22**, pp. 96-102, 2015.
- 46) Maryam Gillani, Hafiz Adnan Niaz, Ata

- Ullah , Muhammad Umar Farooq , And Saad Rehman, "Traffic Aware Data Gathering Protocol for VANETs", *IEEE Access*, **Vol. 03**, pp. 9041-9051, (2022).
- 47) Yida He, Y., He, R., & Yu, C., Intersection-based Traffic-Aware Routing with Fuzzy Q-learning for Urban VANETs, *IEEE International Conference on Security, Pattern Analysis, and Cybernetics (SPAC)*, **Vol. 8**, pp. 511-515, 2021.
- 48) Sathesh Kumar Kandasamy, S., & Mangai, S. , A smart transportation system in VANET based on vehicle geographical tracking and balanced routing protocol. *International Journal of Communication Systems*, **Vol. 4**, pp. 33-46, e4714, 2021.
- 49) Forough Goudarzi, Hamid Asgari, Hamed S. Al-Raweshidy, "Traffic-Aware VANET Routing for City Environments—A Protocol Based on Ant Colony Optimization", *IEEE Systems Journal*, **Vol. 13**, pp. 571 - 581 ,(2018).
- 50) Rui Wu, "GeoTAR: A Map-Based and Traffic-Aware VANET Routing in Urban Scenario", *IEEE 11th International Conference on Communication Software and Networks (ICCSN)*, **Vol. 8**, pp. 138277-138296, (2020).
- 51) Jinqiao Wu, Min Fang, Haikun Li, Xiao Li, "RSU-Assisted Traffic-Aware Routing Based on Reinforcement Learning for Urban Vanets" *IEEE Access*, **Vol. 9**, pp. 5733 – 5748, (2020).
- 52) Sadia Din, Kashif Naseer Qureshi, M. Sheheryar Afsar, Joel J. P. C. Rodrigues, Awais Ahmad, Gyu Sang Choi, "Beaconless Traffic-Aware Geographical Routing Protocol for Intelligent Transportation System", *IEEE Access*, **Vol. 8**, pp. 187671 – 187686, (2020).
- 53) O. Alzamzami and I. Mahgoub, "Geographic routing enhancement for urban VANETs using link dynamic behavior: A cross layer approach", *Vehicular Communications*, **Vol. 6**, no. 1, pp. 4321-4339, 26 March 2021
- 54) P. Singh, R. S. Raw, S. A. Khan, M. A. Mohammed, A. A. Aly and D. -N. Le, "W-GeoR: Weighted Geographical Routing for VANET's Health Monitoring Applications in Urban Traffic Networks," in *IEEE Access*, **Vol. 10**, pp. 38850-38869, 2022
- 55) S. Jiang, Z. Huang and Y. Ji, "Adaptive UAV-Assisted Geographic Routing With Q-Learning in VANET," in *IEEE Communications Letters*, **Vol. 25**, no. 4, pp. 1358-1362, April 2021
- 56) S. A. Rashid, M. Alhartomi, L. Audah and M. M. Hamdi, "Reliability-Aware Multi-Objective Optimization-Based Routing Protocol for VANETs Using Enhanced Gaussian Mutation Harmony Searching," in *IEEE Access*, **Vol. 10**, pp. 26613-26627, 2022
- 57) M. K. Diaa, I. S. Mohamed and M. A. Hassan, "OPBRP - obstacle prediction based routing protocol in VANETs", *Ain Shams Engineering Journal*, **Vol. 12**, no. 1, pp. 451-458, 1 October 2022
- 58) G. D. Singh, M. Prateek, S. Kumar, M. Verma, D. Singh and H. -N. Lee, "Hybrid Genetic Firefly Algorithm-Based Routing Protocol for VANETs," in *IEEE Access*, **vol. 10**, pp. 9142-9151, 2022
- 59) S. Zhou, D. Li and X. Chen, "Multiple intersection selection routing protocol based on road section connectivity probability for urban VANETs", *Computer Communications*, **Vol. 10**, pp. 65426-65438, 12 August 2021
- 60) Anil D. Devangavi, Rajendra Gupta, "Routing protocols in VANET — A survey", *International Conference on Smart Technologies for Smart Nation (2017) (SmartTechCon)*
- 61) Sangheetha Sukumaran, Lakshmi Ramachandran, Surya Rani Sunny, "Intersection based Traffic Aware Routing in VANET", *International Conference on Advances in Computing, Communications and Informatics (2013) (ICACCI)*
- 62) Kajal Jain, Amutha Jeyakumar, "An RSU based approach: A solution to overcome major issues of routing in VANET", *International Conference on Communication and Signal Processing (ICCSP)*, (2016).
- 63) G. Mary Valentina, S. Jayashri, "A novel approach to efficient and reliable routing in Vanets", *The Fifth International Conference on the Applications of Digital Information and Web Technologies (ICADIWT 2014) 2014*.
- 64) Ghait Youssef, Nouredine Idboufker, Khalid Elbaamrani, Raja Ellassali, "Exploration and suitability of numerous routing protocol in VANET", *Proceedings of 2013 International Conference on Industrial Engineering and Systems Management (IESM)*, (2013).
- 65) Shoaib Hayat, Xinyi Liu, Yue Li, Yijun Zhou, "Comparative Analysis of VANET's Routing Protocol Classes: An Overview of Existing Routing Protocol Classes and Futuristic Challenges", *IEEE 2nd International Conference on Electronics Technology (ICET) (2019)*.
- 66) Shivani Sharma, Pooja Sharma, "Comprehensive Study of Various Routing Protocols in VANET", *International Conference on Intelligent Computing and Control Systems (ICCS)*, **Vol. 3**, pp. 56-69, (2019).
- 67) Savita Yadav, Neetu Kumari Rajput, Anil Kumar Sagar, Divya Maheshwari, "Secure and Reliable Routing Protocols for VANETs", *4th International Conference on Computing Communication and Automation (ICCCA)*, **Vol. 1**, pp. 23-36, (2018).
- 68) Anil D. Devangavi, Rajendra Gupta, "Routing protocols in VANET — A survey", *International Conference on Smart Technologies for Smart Nation (2017)*, (SmartTechCon)
- 69) Ranjit Sadakale, Akshay Bhosale, N V K Ramesh,

- “Performance Analysis of Traffic Types in AODV Routing Protocol for VANETs”, (2019), *10th International Conference on Computing, Communication and Networking Technologies (ICCCNT)*
- 70) Kim Youneng, SeloSulistyo, I WayanMustika, “A Comparative Study Cluster-Based Routing Protocols in VANETs for City Environment”, (2019), *International Seminar on Research of Information Technology and Intelligent Systems (ISRITI)*
 - 71) B.S. Yelure, S.P. Sonavane, “QoS Evaluation of VANET Routing Protocol”, (2019), *International Conference on Communication and Electronics Systems (ICCES)*
 - 72) M. I. Krzywinski, J. E. Schein, I. Birol, J. Connors, R. Gascoyne, D. Horsman, S. J. Jones, and M. A. Marra, “Circos: An information aesthetic for comparative genomics,” *Genome Research*, (2009). [Online]. Available: <http://genome.cshlp.org/content/early/2009/06/15/gr.092759.109.abstract>
 - 73) D. Krajzewicz, E. Nicolay, and M. Behrisch, “SUMO - simulation of urban mobility,” 2011. [Online]. Available: <http://sumo.sourceforge.net/>
 - 74) A. Viklund, “Mixim project,” 2011. [Online]. Available: <http://mixim.sourceforge.net>.
 - 75) E. Giordano, R. Frank, G. Pau, and M. Gerla, “CORNER: a realistic urban propagation model for VANET,” in *Seventh International Conference on Wireless On-demand Network Systems and Services (WONS)*. IEEE, Feb. 2010, pp. 57–60.
 - 76) NCTUns 4.0: An Integrated Simulation Platform for Vehicular Traffic, Communication, and Network Researches, 2007. [Online]. Available: <http://dx.doi.org/10.1109/vetecf.2007.437>
 - 77) B. Hassanabadi, C. Shea, L. Zhang, and S. Valaee, “Clustering in vehicular ad hoc networks using affinity propagation,” *Ad Hoc Networks*, **Vol. 13**, Part B, no. 0, pp. 535 – 548, 2014.
 - 78) L. Bernado, T. Zemen, F. Tufvesson, A. Molisch, and C. Mecklenbrauker, “The (in-) validity of the wssus assumption in vehicular radio channels,” in *Personal Indoor and Mobile Radio Communications (PIMRC), 2012 IEEE 23rd International Symposium (2012)*, **Vol. 10**, pp. 1757–1762.
 - 79) C. Perkins and E. Royer, “Ad-hoc on-demand distance vector routing,” in *Proceedings WMCSA’99. Second IEEE Workshop on Mobile Computing Systems and Applications, New Orleans, LA, USA*, **Vol. 7**, pp. 90–100, 1999.
 - 80) J. Blum, A. Eskandarian, and L. Hoffman, “Challenges of intervehicle ad hoc networks,” *IEEE Trans. Intell. Transport. Syst.*, **Vol. 5**, no. 4, pp. 347–351, Dec. 2004.
 - 81) W. Liu, C. Chiang, H. Wu, and C. Gerla, “Routing in Clustered Multihop Mobile Wireless Networks with Fading Channel,” in *Proc. IEEE SICON’97*, Apr. (1997), pp. 197–211.
 - 82) R. A. Santos, R. Edwards, and N. L. Seed, “Inter vehicular data exchange between fast moving road traffic using an ad-hoc clusterbased location routing algorithm and 802.11b direct sequence spread spectrum radio,” in *PostGraduate Networking Conference* (2003).
 - 83) R. A. Santos, R. Edwards, and A. Edwards, “Cluster-based location routing algorithm for inter-vehicle communication,” in *Vehicular Technology Conference, 2004. VTC2004-Fall. 2004 IEEE 60th*, **Vol. 2**, Sept 2004, pp. 914–918.
 - 84) P. Fan, “Improving broadcasting performance by clustering with stability for inter-vehicle communication,” *IEEE 65th in Vehicular Technology Conference*, 2007, **Vol. 22**, pp. 2491–2495, 2007
 - 85) Chen, C.; Liu, L.; Qiu, T.; Wu, D.O.; Ren, Z. Delay-Aware Grid-Based Geographic Routing in Urban VANETs: A Backbone Approach. *IEEE/ACM Trans. Netw.* 2019, **vol. 27**, 2324–2337.
 - 86) Din, S.; Qureshi, K.N.; Afsar, M.S.; Rodrigues, J.J.P.C.; Ahmad, A.; Choi, G.S. Beaconless Traffic-Aware Geographical Routing Protocol for Intelligent Transportation System. *IEEE Access* 2020, **vol. 8**, 187671–187686.
 - 87) Sudheera, K.L.K.; Ma, M.; Chong, P.H.J. Link Stability Based Optimized Routing Framework for Software Defined Vehicular Networks. *IEEE Trans. Veh. Technol.* **Vol. 68**, pp. 2934–2945, 2019.
 - 88) Cardenas, L.L.; Mezher, A.M.; Bautista, P.A.B.; Igartua, M.A. A Probability-Based Multimetric Routing Protocol for Vehicular AdHoc Networks in Urban Scenarios. *IEEE Access* 2019, **Vol. 7**, 178020–178032.
 - 89) Kaur, H.; Meenakshi. Analysis of VANET Geographic Routing Protocols on Real City Map. In *Proceedings of the IEEE International Conference on Recent Trends in Electronics Information & Communication Technology (RTEICT)*, Bangalore, India, 19–20 May 2017.
 - 90) Deshmukh, A.R.; Dhawale, S.A.; Dorle, S.S. Analysis of Cluster Based Routing Protocol (CBRP) for Vehicular Adhoc Network(VANet) in Real Geographic Scenario. In *Proceedings of the 2020 IEEE International Conference on Electronics, Computing and Communication Technologies (CONECCT)*, Bangalore, India, 2–4 July 2020.
 - 91) Chen, C.; Liu, L.; Qiu, T.; Yang, K.; Gong, F.; Song, H. ASGR: An Artificial Spider-Web-Based Geographic Routing in Heterogeneous Vehicular Networks. *IEEE Trans. Intell. Transp. Syst.* 2018, **20**, 1604–1620.
 - 92) Nebbou, T.; Lehsaini, M. Greedy Curvemetric-based Routing Protocol for VANETs. In *Proceedings of the 2018 International Conference on Selected Topics in Mobile and Wireless Networking (MoWNeT)*, Tangier, Morocco, 20–22 June 2018.

- 93) Kalogeiton, E.; Iapello, D.; Torsten Braun, T. A Geographical Aware Routing Protocol Using Directional Antennas for NDN- VANETs. In *Proceedings of the 2019 IEEE 44th Conference on Local Computer Networks (LCN)*, Osnabrueck, Germany, 14–17 October 2019.
- 94) Saleet, H.; Langar, R.; Naik, K.; Boutaba, R.; Nayak, A.; Goel, N. Intersection-Based Geographical Routing Protocol for VANETs: A Proposal and Analysis. *IEEE Trans. Veh. Technol.* 2011, **Vol. 60**, pp. 4560–4574, 2011.
- 95) Liu, H.; Qiu, T.; Zhou, X.; Chen, C.; Chen, N. Parking-area-assisted Spider-web Routing Protocol for Emergency Data in Urban VANET. *IEEE Trans. Veh. Technol.* 2019, **Vol. 69**, pp. 971–982, 2019.
- 96) Wu, J.; Fang, M.; Li, H.; Li, X. RSU-Assisted Traffic-Aware Routing Based on Reinforcement Learning for Urban Vanets. *IEEE Access* 2019, **Vol. 8**, 5733–5748, 2019
- 97) Rios, M. GeOpps-N: Opportunistic Routing for VANET in a Public Transit System. *IEEE Lat. Am. Trans.* 2016, **Vol. 14**, pp. 1630–1637, 2016
- 98) Sahu, P.K.; Wu, E.H.K.; Sahoo, J.; Gerla, M. BAHG: Back-Bone-Assisted Hop Greedy Routing for VANET's City Environments. *IEEE Trans. Intell. Transp. Syst.* 2013, **Vol. 12**, 199–213, 2013.
- 99) Salkuyeh, M.A.; Abolhassani, B. An Adaptive Multipath Geographic Routing for Video Transmission in Urban VANETs. *IEEE Trans. Intell. Transp. Syst.* 2016, **Vol. 17**, 2822–2831, 2016.
- 100) Zhou, S.; Li, D.; Tang, Q.; Fu, Y.; Guo, C.; Chen, X. Multiple intersection selection routing protocol based on road section connectivity probability for urban VANETs. *Comput. Commun.* 2021, **177**, 255–264, 2021.
- 101) Sultana, R.; Grover, J.; Tripathi, M. Security of SDN-based vehicular ad hoc networks: State-of-the-art and challenges. *Veh. Commun.* 2020, **27**, 100284. [CrossRef]
- 102) Jeong, J.; Shen, Y.; Oh, T.; Céspedes, S.; Benamar, N.; Wetterwald, M.; Härrä, J. A comprehensive survey on vehicular networks for smart roads: A focus on IP-based approaches. *Veh. Commun.*, **Vol. 29**, pp. 100-134, 2021.
- 103) Qureshi, K.N.; Alhudhaif, A.; Shah, A.A.; Majeed, S.; Jeon, G. Trust and priority-based drone assisted routing and mobility and service-oriented solution for the internet of vehicles networks. *J. Inf. Secur. Appl.* 2021, **Vol. 59**, pp. 102-116, 2021.
- 104) Husain, K.; Awang, A.; Kamel, N.; Aïssa, S. Routing in Vehicular Ad-hoc Networks: A Survey on Single and Cross-layer Design Techniques, and Perspectives. *IEEE Access* 2016, **Vol. 5**, pp. 9497–9517.
- 105) Kazi, A.K.; Khan, S.M.; Haider, N.G. Reliable Group of Vehicles (RGoV) in VANET. *IEEE Access* 2019, **Vol. 9**, pp. 111407–111416, 2019.
- 106) Yang, X.; Li, M.; Qian, Z.; Di, T. Improvement of GPSR protocol in Vehicular Ad hoc Network. *IEEE Access* 2017, **Vol. 6**, pp. 39515–39524, 2017.
- 107) Abbas, A.H.; Audah, L.; Alduais, N.M.N. An efficient load balance algorithm for vehicular ad-hoc network. In *Proceedings of the 2018 Electrical Power, Electronics, Communications, Controls and Informatics Seminar (EECCIS)*, Batu, Indonesia, **Vol. 6**, pp. 9–20, October 2018.
- 108) K. C. Lee, U. Lee, and M. Gerla, “Survey of Routing Protocols in Vehicular Ad Hoc Networks,” in *Advances in Vehicular Ad-Hoc Networks: Developments and Challenges*, M. Watfa. IGI Global, ch. 8, pp. 149–170, 2010
- 109) O. Trullols, M. Fiore, C. Casetti, C.-F. Chiasserini, J.M. Barcelo Ordinas, “Planning roadside infrastructure for information dissemination in intelligent transportation systems”, *computer communications Elsevier*, **Vol. 4**, pp 432–442, 2010.
- 110) S.S. Kaushik, “Review of different approaches for privacy scheme in VANETs”, *IEEE Access*, **Vol. 5**, ISSN 2231-1963, 2012.
- 111) J.-P. Hubaux, S. Capkun, J. Luo, “The security and privacy of smart vehicles”, *IEEE Secur.Priv.*, **Vol. 3**, pp- 49–55, 2004.
- 112) C. Wei, Y. Jianding, L. Xiangjun, “The design of electronic license plate recognition terminal system based on nRF24LE1”, *Fifth International Symposium on Computational Intelligence and Design (ISCID)*, **Vol. 12**, pp. 127-129, 2012.
- 113) M. J.-P. Hubaux, S. Capkun, J. Luo, “The security and privacy of smart vehicles”, *IEEE J. Comput. Secur.*, **Vol. 15**, pp- 39–68, 2007.
- 114) Saleh Yousefi, Mahmood Siadat Mousavi, Mahmood Fathy, “Vehicular Ad Hoc Networks (VANETs) : Challenges and Perspectives”, in *International conference on ITS Telecommunications Proceedings*, **Vol. 8**, pp. 1151- 1155, 2006.
- 115) J. Kakarla, S. Siva Sathya, B.G. Laxmi, B. Ramesh Babu, “A survey on routing protocols and its issues in VANET”, *International Journal Computing. Application*, **Vol. 28**, pp. 0975-8887, 2011 .
- 116) L.K. Qabajeh, M.L.M. Kiah, M.M. Qabajeh, “A scalable and secure position-based routing protocols for ad-hoc networks”, *Malaysia. Journal Computer Science*, **Vol. 22**, pp. 99–120, 2009.
- 117) F.D. Rango, J.-C. Cano, M. Fotini, C. Calafate, P. Manzoni, S. Marano, “OLSR vs DSR: a comparative analysis of proactive and reactive mechanisms from an energetic point of view in wireless ad hoc networks”, *Comput. Commun.*, **Vol. 6**, pp 3843–3854, 2008.
- 118) Philippe Jacquet, Paul Muhlethaler, Thomas Clausen, Anis Laouiti, Amir Qayyum, Laurent Viennot, “Optimized link state routing protocol for adhoc networks”, in: *Multi Topic Conference, 2001. IEEE INMIC .Technology for the 21st Century*.

- Proceedings.IEEE International, IEEE, Vol. 4*, pp. 62–68, 2001.
- 119) M. Osman, “The performance of aodv routing protocol based on dropped packet and throughput metrics: a simulation and comparative study for VANET”, *Int. J. Manag. Inform. Technol.* **Vol. 4**, pp 265–279, 2013.
 - 120) B. Karp and H.T. Kung, “GPSR: Greedy perimeter stateless routing for wireless networks”, in *Proceedings of the ACM/IEEE International Conference on Mobile Computing and Networking (MobiCom)*, **Vol. 7**, pp. 345-367, 2000.
 - 121) R. Jain, A. Puri, R. Sengupta, “Geographical routing using partial information for wireless ad hoc networks”, *IEEE Pers. Commun.* **8**, **Vol. 1**, pp 48–57, 2001.
 - 122) H. Rahbar, K. Naik, A. Nayak, “Dtsg: dynamic time-stable geo-cast routing in vehicular ad hoc networks”, in: *9th IFIP Annual Mediterranean Ad Hoc Networking Workshop (Med-Hoc-Net)*, *IEEE*, **Vol. 3**, pp. 1–7, 2010.
 - 123) S.-Y. Wang, C.-C. Lin, K.-C. Liu, W.-J. Hong, “On multi-hop forwarding over wbs-based IEEE 802.11 (p)/1609 networks”, in: *IEEE 20th International Symposium on Personal, Indoor and Mobile Radio Communications, IEEE*, **Vol. 5**, pp. 3040–3044, 2009.
 - 124) L. Miao, K. Djouani, B.J. van Wyk, Y. Hamam, “Evaluation and enhancement of IEEE 802.11 p standard: a survey”, *Mob. Comput.* **1**, **Vol. 1**, pp. 234-267, 2012.
 - 125) B. Ducourthial, F. El Ali, et al., “Architecture pour communication vehicular-infrastructure”, *CFIP*, **Vol. 5**, pp. 19-30, 2009.
 - 126) J.T. Isaac, S. Zeadally, J.S. Camara, “Security attacks and solutions for vehicular ad hoc networks”, *IET commun*, **Vol. 4**, pp 894-903, 2010-04-30
 - 127) Ennaciri, A. , Performance analysis of streaming video over vehicular ad-hoc, in *Proc. of 13th International Conference on Computer Graphics, Imaging and Visualization (CGiV)*, **Vol. 8**, pp. 375-380, 2016.
 - 128) Gupta, P. and Chaba, Y., Performance analysis of routing protocols in vehicular ad-hoc networks for cbr applications over udp connections, in *Proc. of International Journal of Engineering and Computer Science*, **Vol. 3**, pp. 6418-6421, 2014
 - 129) Hassan, A.S.A., Hossain, M.S and Atiquzzaman, Security threats in vehicular ad-hoc networks, in *Proc. of International Conference on Advances in Computing, Communications and Informatics (ICACCI)*, **Vol. 9**, pp. 404-411, 2016.
 - 130) Joshi, J. , 2COMIP: Cluster based overlay and fast hand off mobile internet protocol system for video streaming in VANETs, in *Proc. of 2015 IEEE 3rd International Conference on Smart Instrumentation, Measurement and Applications (ICSIMA)*, **Vol. 3**, pp. 1-6, 2015.
 - 131) Kaur, A. and Malhotra, J., 2015. On the selection of quality of service provisioned routing protocol through realistic channel for VANET, in *Proc. of International Journal of Scientific and Technology Research*, **Vol. 4**, pp. 234-267, 2015.
 - 132) Kumar, . Performance Evaluation of DSDV, AODV and LSGR Protocol in Ad Hoc Networks, in *Proc. of 2016 International Conference on Electrical, Electronics, and Optimization Techniques (ICEEOT)*, **Vol. 8**, pp. 4261-4266, 2016.
 - 133) Lengliz, I. and Slama, A., 2016. Enhancing AODV and DSR with the RLT strategy for efficient routing in VANETs, in *Proc. of 2016 International Symposium on Networks, Computers and Communications*, **Vol. 9**, pp. 1-6, 2016.
 - 134) Mammeri, A., Boukerche, A. and Fang, Z., Video streaming over vehicular ad hoc networks using erasure coding, in *Proc. of IEEE Systems Journal*, **Vol. 10**, pp. 785-796, 2016.
 - 135) Mouhib, I. , Network as a service for smart vehicles: A new comparative study of the optimized protocol Q-AODV and GPSR protocol, in *Proc. of 2016 International Conference on Engineering and MIS (ICEMIS)*, **Vol. 1**, pp. 1-5, 2016.
 - 136) Sallam, G. and Mahmoud, A., Performance evaluation of OLSR and AODV in VANET cloud computing using fading model with SUMO and NS3, in *Proc. of International Conference on Cloud Computing (ICCC)*, **Vol. 6**, pp. 1-5, 2015.
 - 137) Salman, A., Analysis of topology based routing protocols for VANETs in different environments, in *Proc. of 2016 IEEE International Multidisciplinary Conference on Engineering Technology (IMCET)*, **Vol. 2**, pp. 27-31, 2016.
 - 138) Sarakis, L., Providing entertainment application in VANET environment, in *Proc. IEEE Wireless Communication Conference*, **Vol. 9**, pp. 30-37, 2016.
 - 139) Setiabudi, A., Performance comparison of GPSR and ZRP routing protocols in VANET environment, in *Proc. 2016 IEEE Region 10 Symposium (TENSYP)*, **Vol. 6**, pp. 42-47, 2016
 - 140) Spaho, E., Ikeda, M., Barolli, F., Xhafa, F., Younas, M and Takizawa, Performance evaluation of OLSR and AODV protocols in a VANET, in *Proc. of IEEE 27th International Conference on Advanced Information Networking and Applications (AINA)*, **Vol. 2**, pp. 577-582, 2013
 - 141) Vijayakumar, P., Azees, M. and Deborah, J., Dual authentication and key management techniques for secure data transmission in Vehicular Ad Hoc Networks, in *Proc. of International Journal of IET Intelligent Transport Systems*, **Vol. 17**, pp. 1015-1028, 2016.
 - 142) Wei, Y., Xu, C., Wang, M. and Guan, J., Cache management for adaptive scalable video streaming in Vehicular Content-Centric Network, in *Proc. of*

- 2016 *International Conference on Networking and Network Applications (NaNA)*, **Vol. 4**, pp. 410-414, 2016.
- 143) T.-Y. Wu, Y.-B. Wang, and W.-T. Lee, "Mixing greedy and predictive approaches to improve geographic routing for vanet," *Wireless Communications and Mobile Computing*, **Vol. 12**, no. 4, pp. 367–378, 2012.
- 144) J. Bernsen and D. Manivannan, "Unicast routing protocols for vehicular ad hoc networks: A critical comparison and classification," *Pervasive and Mobile Computing*, **Vol. 5**, no. 1, pp. 1 – 18, 2009.
- 145) Alheeti et al., "On the detection of grey hole and rushing attacks in self-driving vehicular networks", *Proc. of 7th Computer Science and Electronic Engineering Conference (CEECE)*, pp. 231-236, 2015.
- 146) M. Azees, P. Vijayakumar and J. Deborah, "Comprehensive survey on security services in vehicular ad-hoc networks", *Proc. of International Journal of IET Intelligent Transport Systems*, **Vol. 10**, pp. 379-388, 2016.
- 147) P. Gupta and Y. Chaba, "Performance Analysis of Routing-Protocols in Vehicular Ad Hoc Networks for Cbr Applications Over Udp Connections", *Proc. of International Journal Of Engineering And Computer Science*, **Vol. 3**, pp. 6418-6421, 2014.
- 148) A.S.A. Hassan, M.S Hossain and M. Atiquzzaman, "Security Threats in Vehicular Ad Hoc Networks", *Proc. of International Conference on Advances in Computing Communications and Informatics (ICACCI)*, pp. 404-411, 2016.
- 149) J. Jain and A. Jeyakumar, "An RSU Based Approach: A solution to overcome major issues of Routing in VANET", *Proc. of International Conference on Communication and Signal Processing (ICCSP)*, pp. 1265-1269, 2016.
- 150) S. Jiang, X. Zhu and L. Wang, "An Efficient Anonymous Batch Authentication Scheme Based on HMAC for VANETs", *Proc. of IEEE Transactions on Intelligent Transportation Systems*, **Vol. 17**, pp. 2193-2204, 2016.
- 151) T. Karimireddy and A. Bakshi, "A Hybrid Security Framework for the Vehicular Communications in VANET", *Proc. of International Conference on Wireless Communications Signal Processing and Networking (WiSPNET)*, pp. 1929-1934, 2016.
- 152) A. Kaur and J. Malhotra, "On The Selection of Qos Provisioned Routing Protocol Through Realistic Channel for VANET", *Proc. of International Journal of Scientific and Technology Research*, **Vol. 4**, no. 07, 2015.
- 153) N.W. Lo and J.L. Tsai, "An Efficient Conditional Privacy-Preserving Authentication Scheme for Vehicular Sensor Networks Without Pairings", *Proc. of IEEE Transactions on Vehicular Technology*, **Vol. 17**, pp. 1319-1328, 2016.
- 154) R. Lu, X. Lin, X. Liang and X. Sheen, "A Dynamic Privacy-Preserving Key Management Scheme for Location-Based Services in VANETs", *Proc. of IEEE Transactions on Intelligent Transportation Systems*, **Vol. 13**, pp. 127-139, 2012.
- 155) V.H. La and A. Cavalli, "Security Attacks and Solutions in VANET: A Survey", *Proc. of International Journal on AdHoc Networking Systems (IJANS)*, **Vol. 4**, no. 2, 2014.
- 156) A. Malik and B. Panday, "Performance analysis of enhanced authentication scheme using re-key in VANET", *Proc. of 6th International Conference - Cloud System and Big Data Engineering (Confluence)*, pp. 591-596, 2016.
- 157) R. Mishra, A. Singh and R. Kumar, "VANET Security: Issues Challenges and Solutions", *Proc. of International Conference on Electrical Electronics and Optimization Techniques (ICEEOT)*, pp. 1050-1055, 2016.
- 158) U. Rajput, F. Abbas, J. Wang, H. Eun and H. Oh, "CACPPA: A Cloud-Assisted Conditional Privacy Preserving Authentication Protocol for VANET", *Proc. of 16th IEEE/ACM International Symposium on Cluster Cloud and Grid Computing*, pp. 434-442, 2016.
- 159) B. Ko and N. H. Vaidya, "Location-Aided Routing (LAR) in mobile ad hoc networks," *ACM journal of Wireless Networks*, **Vol. 6**, pp. 307–321, 2000.
- 160) A. Sari, O. Onursal and M. Akkaya, "Review of the Security Issues in Vehicular Ad Hoc Networks (VANET)", *Proc. of International Journal of Communications Network and System Sciences*, pp. 552-566, 2015.
- 161) K. Shukla, C.K. Jha and A. Shukla, "On The Selection of Qos Provisioned Routing Protocol Through Realistic Channel for VANET", *Proc. of International Journal of Scientific and Technology Research*, **Vol. 4**, no. 07, 2015.
- 162) Y. B. Ko and N. H. Vaidya, "Location-Aided Routing (LAR) in mobile ad hoc networks," *ACM journal of Wireless Networks*, **Vol. 6**, pp. 307–321, 2000.
- 163) E. Spaho, M. Ikeda, F. Barolli, F. Xhafa, A. Biberaj and J. Iwashige, "Performance Comparison of DSDV and DYMO Protocols for Vehicular Ad Hoc Networks", *Proc. of IEEE 26th International Conference on Advanced Information Networking and Applications*, pp. 629-634, 2012.
- 164) Wang et al., "2FLIP A Two-Factor Lightweight Privacy-Preserving Authentication Scheme for VANET", *Proc. of IEEE Transactions on Vehicular Technology*, vol. 65, pp. 896-911, 2016.
- 165) X. Yong, W.U. Libing, Z. Yubo and S. Jian, "Efficient and Secure Authentication Scheme with Conditional Privacy-Preserving for VANETs", *Proc. of Chinese Journal Electronics*, **Vol. 25**, no. 5, 2016.
- 166) J. Zhang and Z. Sun, "Assessing multi-hop performance of reactive routing protocols in wireless

- sensor networks", *Proc. of IEEE International Conference on Communication Software and Networks (ICCSN)*, **Vol. 6**, pp. 444-449, 2016.
- 167) Prinkle Sharma, James Gillanders, "Cybersecurity and Forensics in Connected Autonomous Vehicles: A Review of the State-of-the-Art", *IEEE Access*, **Vol.10**, pp.108979-108996, 2022.
- 168) Bhagwati Sharan, Megha Chhabra, Anil Kumar Sagar, "State-of-the-art: Data Dissemination Techniques in Vehicular Ad-hoc Networks", *2022 9th International Conference on Computing for Sustainable Global Development (INDIACom)*, pp.126-131, 2022.
- 169) Xiangjie Kong, Haoran Gao, Guojiang Shen, Gaohui Duan, Sajal K. Das, "FedVCP: A Federated-Learning-Based Cooperative Positioning Scheme for Social Internet of Vehicles", *IEEE Transactions on Computational Social Systems*, **Vol. 9**, no.1, pp.197-206, 2022.
- 170) Sagheer Ahmed Jan, Noor Ul Amin, Mohamed Othman, Mazhar Ali, Arif Iqbal Umar, Abdul Basir, "A Survey on Privacy-Preserving Authentication Schemes in VANETs: Attacks, Challenges and Open Issues", *IEEE Access*, **Vol. 9**, pp.153701-153726, 2021.
- 171) Tansu S. Haque, Md. H. Rahman, Md. Robiul Islam, Md. Abdur Razzak, Faisal R. Badal, Md. H. Ahamed, S. I. Moyeen, Sajal K. Das, Md. F. Ali, Z. Tasneem, D. K. Saha, Ripon K. Chakraborty, Mike Ryan, "A Review on Driving Control Issues for Smart Electric Vehicles", *IEEE Access*, **Vol. 19**, pp.135440-135472, 2021.
- 172) Md. Tareq Mahmud, Md. Obaidur Rahman, Salman A. Alqahtani, Mohammad Mehedi Hassan, "Cooperation-Based Adaptive and Reliable MAC Design for Multichannel Directional Wireless IoT Networks", *IEEE Access*, **Vol.10**, pp.97518-97538, 2021.
- 173) R. Bindu, M. Preethi Sejal, H. Chetan, "A Survey Paper on Evolution of Vanet Towards IOV", *Optical and Wireless Technologies*, **Vol.892**, pp.99, 2023.
- 174) Steffie Maria Stephen, Arunita Jaekel, "Roadside unit-based pseudonym authentication in vehicular ad hoc network", *SECURITY AND PRIVACY*, **Vol. 5**, no.5, 2022.
- 175) M. Gayathri, C. Gomathy, "An Overview of Security Services and Trust-Based Authentication Schemes in VANET", *Micro-Electronics and Telecommunication Engineering*, **Vol. 373**, pp.193, 2022.
- 176) Kumar Prateek, Fahiem Altaf, Ruhul Amin, Soumyadev Maity, "A Privacy Preserving Authentication Protocol Using Quantum Computing for V2I Authentication in Vehicular Ad Hoc Networks", *Security and Communication Networks*, **Vol. 2**, pp.1, 2022.
- 177) Jiabei He, Xuchong Liu, Fan Wu, Chaoyang Chen, Xiong Li, "A mutual authentication scheme in VANET providing vehicular anonymity and tracking", *Telecommunication Systems*, **Vol.81**, no.2, pp.175, 2022.
- 178) Fadlallah Chbib, Lyes Khoukhi, Walid Fahs, Jamal Haydar, Rida Khatoun, "A cross-layered scheme for multichannel and reactive routing in vehicular ad hoc networks", *Transactions on Emerging Telecommunications Technologies*, **Vol. 33**, no.7, 2022.
- 179) Akshat Gaurav, B. B. Gupta, Kwok Tai Chui, "Edge Computing-Based DDoS Attack Detection for Intelligent Transportation Systems", *Cyber Security, Privacy and Networking*, **Vol. 370**, pp.175, 2022.
- 180) Chinmoy Kalita, Nupur Choudhury, Aradhana Misra, Kandarpa Kumar Sarma, "Design of a Basic Vehicular Communication Network using Radar and Camera Sensor with Enhanced Safety Features", *International Journal of Circuits, Systems and Signal Processing*, **Vol.16**, pp.822, 2022.
- 181) Akshat Gaurav, B. B. Gupta, Francisco José García Peñalvo, Nadia Nedjah, Konstantinos Psannis, "DDoS Attack Detection in Vehicular Ad-Hoc Network (VANET) for 5G Networks", *Security and Privacy Preserving for IoT and 5G Networks*, **Vol. 95**, pp.263, 2022.
- 182) Pradosh Kumar Gantayat, Satyabrata Das, Bata Krishna Tripathy, "A Hybrid Route Optimization Mechanism in Delay Tolerant Networks", *Advances in Distributed Computing and Machine Learning*, **Vol.302**, pp.34, 2022.
- 183) Manik Taneja, Neeraj Garg, "Smart Traffic Monitoring and Alert System Using VANET and Deep Learning", *International Conference on Innovative Computing and Communications*, **Vol.1387**, pp.525, 2022.
- 184) Benedito Cunha, Carlos Brito, Gabriel Araújo, Rayner Sousa, André Soares, Francisco Airton Silva, "Smart Traffic Control in Vehicle Ad-Hoc Networks: A Systematic Literature Review", *International Journal of Wireless Information Networks*, **Vol.28**, no.3, pp.362, 2021.
- 185) Zhenbo Cao, Zujie Fan, Jaesool Kim, "Intersection-Based Routing with Fuzzy Multi-Factor Decision for VANETs", *Applied Sciences*, **Vol.11**, no.16, pp.7304, 2021.
- 186) Manipriya Sankaranarayanan, Mala Chelliah, Samson Mathew, "A Feasible RSU Deployment Planner Using Fusion Algorithm", *Wireless Personal Communications*, **Vol.16**, no.3, pp.1849, 2021.
- 187) Biswa Ranjan Senapati, Pabitra Mohan Khilar, Rakesh Ranjan Swain, "Fire Controlling Under Uncertainty in Urban Region Using Smart Vehicular Ad hoc Network", *Wireless Personal Communications*, **Vol. 116**, no.3, pp.2049, 2021.
- 188) Esmaeil Amiri, Reza Hooshmand, "RETRACTED

- ARTICLE: Improved AODV Based on TOPSIS and Fuzzy Algorithms in Vehicular Ad-hoc Networks", *Wireless Personal Communications*, **Vol.111**, no.2, pp.947, 2020.
- 189) J S C Turner, A B Shahrman, A Harun, M S M Hashim, Z M Razlan, W K Wan, Z Ibrahim, A H Abdullah, M A Fadzila, K A A Kassim, M S A Khalid, Z Jawi, M H M Isa, S A Z Murad, R C Ismail, "Effect of Roadways Plantation on Signal Propagation Analysis in Connected Autonomous Vehicle Communication", *IOP Conference Series: Materials Science and Engineering*, **Vol. 557**, no.1, pp.012056, 2019.
 - 190) Waleed Albattah, Shabana Habib, Mohammed F. Alsharekh, Muhammad Islam, Saleh Albahli, Deshinta Arrova Dewi, "An Overview of the Current Challenges, Trends, and Protocols in the Field of Vehicular Communication", *Electronics*, **Vol. 11**, no.21, pp.3581, 2022.
 - 191) Twinkle Chatterjee, Raja Karmakar, Georges Kaddoum, Samiran Chattopadhyay, Sandip Chakraborty, "A Survey of VANET/V2X Routing From the Perspective of Non-Learning- and Learning-Based Approaches", *IEEE Access*, **Vol.10**, pp.23022-23050, 2022.
 - 192) Jingjing Cui, Dong Liu, Jiankang Zhang, Halil Yetgin, Soon Xin Ng, Robert G. Maunder, Lajos Hanzo, "Minimum-Delay Routing for Integrated Aeronautical Ad Hoc Networks Relying on Real Flight Data in the North-Atlantic Region", *IEEE Open Journal of Vehicular Technology*, **Vol. 2**, pp.310-320, 2021.
 - 193) Khaleel Merhad, "SURFER: A Secure SDN-Based Routing Protocol for Internet of Vehicles", *IEEE Internet of Things Journal*, **Vol. 8**, no.9, pp.7407-7422, 2021.
 - 194) Palak Bagga, Ashok Kumar Das, Mohammad Wazid, Joel J. P. C. Rodrigues, Youngho Park, "Authentication Protocols in Internet of Vehicles: Taxonomy, Analysis, and Challenges", *IEEE Access*, **Vol.8**, pp.54314-54344, 2020.
 - 195) N. Jyothi, Rekha Patil, "A fuzzy-based trust evaluation framework for efficient privacy preservation and secure authentication in VANET", *Journal of Information and Telecommunication*, **Vol.6**, no.3, pp.270, 2022.
 - 196) Abeer Hassan, Radwa Attia, Rawya Rizk, "Internet of Vehicles and Intelligent Routing: A Survey-Based Study", *The 8th International Conference on Advanced Machine Learning and Technologies and Applications (AMLT2022)*, **Vol.113**, pp.517, 2022.
 - 197) Shubha R. Shetty, D. H. Manjaiah, "A Comprehensive Study of Security Attack on VANET", *Data Management, Analytics and Innovation*, **Vol.71**, pp.407, 2022.
 - 198) Ing. Boris Cucor, "Outlines of Vehicular Ad-Hoc networks", *Transportation Research Procedia*, **Vol.55**, pp.1312, 2021.
 - 199) K. H. Rashmi, Rekha Patil, "Survey on Cross Layer Approach for Robust Communication in VANET", *Wireless Personal Communications*, **Vol.119**, no.4, pp.3413, 2021.
 - 200) Anishka Abraham, Rani Koshy, "A Survey on VANETs Routing Protocols in Urban Scenarios", *Second International Conference on Networks and Advances in Computational Technologies*, pp.217, 2021.