

Simulating turbulent mixing caused by local instability of internal gravity waves

Onuki, Yohei

Research Institute for Applied Mechanics, Kyushu University

Joubaud, Sylvain

Univ Lyon, ENS de Lyon, CNRS, Laboratoire de Physique

Dauxois, Thierry

Univ Lyon, ENS de Lyon, CNRS, Laboratoire de Physique

<https://hdl.handle.net/2324/7171738>

出版情報 : Journal of Fluid Mechanics. 915, pp.A77-, 2021-05-25. Cambridge University Press
バージョン :

権利関係 : © The Author(s), 2021. Published by Cambridge University Press



Simulating turbulent mixing caused by local instability of internal gravity waves

Yohei Onuki^{1†}, Sylvain Joubaud^{2,3} and Thierry Dauxois²

¹Research Institute for Applied Mechanics, Kyushu University, 6-1 Kasuga-koen, Kasuga, Fukuoka, Japan

²Université de Lyon, ENS de Lyon, Université Claude Bernard, CNRS, Laboratoire de Physique, F-69342 Lyon, France

³Institut Universitaire de France, France

(Received xx; revised xx; accepted xx)

With the aim of assessing internal wave-driven mixing in the ocean, we develop a new technique for direct numerical simulations of stratified turbulence. Since the spatial scale of oceanic internal gravity waves is typically much larger than that of turbulence, fully incorporating both in a model would require a high computational cost, and is therefore out of our scope. Alternatively, we cut out a small domain periodically distorted by an unresolved large-scale internal wave and locally simulate the energy cascade to the smallest scales. In this model, even though the Froude number of the outer wave, Fr , is small such that density overturn or shear instability does not occur, a striped pattern of disturbance is exponentially amplified through a parametric subharmonic instability. When the disturbance amplitude grows sufficiently large, secondary instabilities arise and produce much smaller-scale fluctuations. Passing through these two stages, wave energy is transferred into turbulence energy and will be eventually dissipated. Different from the conventional scenarios of vertical shear-induced instabilities, a large part of turbulent potential energy is supplied from the outer wave and directly used for mixing. The mixing coefficient $\Gamma = \epsilon_P/\epsilon$, where ϵ is the dissipation rate of kinetic energy and ϵ_P is that of available potential energy, is always greater than 0.5 and tends to increase with Fr . Although our results are mostly consistent with the recently proposed scaling relationship between Γ and the turbulent Froude number, Fr_t , the values of Γ obtained here are larger by a factor of about two than previously reported.

1. Introduction

Diapycnal mixing in the mid-depth and deep ocean is a major contributor to the global overturning circulation that transports water mass, heat, and various biochemical substances (Munk & Wunsch 1998). Therefore, quantifying and parameterising the small-scale turbulent mixing that cannot be resolved in ocean circulation models are crucial to our ability of predicting changes in the Earth's environment (MacKinnon *et al.* 2017).

The difficulty in understanding interior ocean mixing comes from the multi-scale nature of the system. The smallest length scale of the fluid motion that enhances heat conduction or salinity diffusion is normally $O(1\text{cm})$ or much smaller (Thorpe 2005). Energy of this turbulent motion is mainly supplied from internal gravity waves, whose spatial scale is the order of tens or hundreds of meters. To fully assess the mixing in the ocean using a three-dimensional direct numerical simulation (DNS) model, accordingly, would need to

† Email address for correspondence: onuki@riam.kyushu-u.ac.jp

incorporate larger than $O(10^{12})$ grid points, which is an extremely challenging task even with the latest parallel computing systems.

Since the ordinary DNS cannot resolve both the typical scales of waves and turbulence, many studies simplify the problem. A widely considered situation is the mixing occurring in a vertically sheared horizontal flow due to Kelvin-Helmholtz or Holmboe instabilities (see, e.g., Smyth *et al.* 2001; Salehipour *et al.* 2016; Caulfield 2021; Dauxois *et al.* 2021). In this case, the energy of turbulence is supplied from the kinetic energy of a background horizontal flow and will be redistributed to viscous dissipation and vertical buoyancy flux. In a stationary state, the vertical buoyancy flux coincides with the conversion rate from the available potential energy to the background potential energy. Since Osborn (1980), this energy balance has been regarded as representative in the ocean. Great attention has been directed to the ratio between the turbulence energy loss and the background potential energy gain, or the so-called mixing efficiency (Gregg *et al.* 2018), which is a fundamental parameter that influences the global-scale ocean circulation.

It is true that the ocean interior is typically dominated by slowly varying vertically sheared horizontal flows accompanying geostrophic currents or near-inertial waves, to which the above-mentioned model may well apply. However, this simplified model does not necessarily portrays high-frequency wave-driven mixing. In general, internal wave energy is divided into the kinetic energy and the available potential energy. If rotation is excluded, these two are evenly partitioned. As was shown in laboratory experiments of Rayleigh-Taylor instability, when mixing is caused by the release of available potential energy through convection, the mixing efficiency becomes several factors higher than that in the cases of shear instability (Davies Wykes & Dalziel 2014). Accordingly, to fully understand the mixing caused by internal waves and to properly parameterise the mixing efficiency, it is vital to extend the discussion from classical shear instability to a wider variety of scenarios for turbulence generation.

Most of the previous numerical studies that examined turbulence generated by internal waves (such as, Lombard & Riley 1996; Bouruet-Aubertot *et al.* 2001; Fritts *et al.* 2006; Achatz 2007; Fritts *et al.* 2009*a,b,c*, 2016) have resolved both the scales of waves and turbulence in a model. In this study, on the other hand, with the aim of increasing the Reynolds number while reducing the computational cost, we do not resolve the largest wave component. Instead, we cut out a small domain periodically distorted by an unresolved outer wave, and simulate the excitation and dissipation of turbulence within it. It is noted that this configuration may seem similar to Inoue & Smyth (2009). They tilted the angle of a rigid model domain to imitate forcing from a larger-scale internal wave. Here, in contrast, we distort the shape of the domain to take into account the effects of oscillating velocity shear and buoyancy gradient that play essential roles on the energy conversion from waves to turbulence.

In the present model, the wave field is idealised as a linear shear flow, such that the turbulence enhanced in it is statistically homogeneous. Hence, we can assume periodic boundary conditions in all directions and employ the Fourier spectral discretisation, enabling precise representation of an energy cascade to the smallest dissipation scale. As for homogeneous turbulence of stratified shear flow, there have been numerous studies using DNS (Portwood 2019, and references therein). They utilised a generic technique originally invented by Rogallo (1981) that we basically follow. However, the present study differs from the existing ones in two points:

1. In our model, the background shear varies periodically associated with the oscillation of the outer wave. As we shall see, this periodic variation causes parametric excitation of disturbances. Consequently, the turbulence energy is more easily amplified than in the conventional cases of stationary shear flows.

2. Since the buoyancy gradient is also changed by the outer wave, a fluid parcel crossing this gradient at some instant gains the available potential energy, which subsequently drives turbulent motion. This contrasts with the classical view of shear-driven mixing in a horizontal flow that is associated only with the shear production of kinetic energy.

In general, properties of stratified turbulence, including the mixing efficiency, are determined by the competing effects of buoyancy, inertia, viscosity and diffusion. Therefore, a thorough analysis requires to check the dependency of the experimental results on at least three dimensionless parameters. Among these, motivated by the suggestion of Maffioli *et al.* (2016) that competition between inertia and buoyancy is primarily important in high-Reynolds number regimes, we vary the Froude number of the outer wave that controls the energy level of turbulence while fixing the other parameters.

The paper is organised as follows. The model and the calculation methods are described in §2. We present the simulation results in §3 and discuss the mixing efficiency from an energetic viewpoint in §4. Concluding remarks are presented in §5.

2. Formulation and calculation method

In this study, we consider a stably stratified fluid motion governed by the Navier-Stokes equation with the Boussinesq approximation, specifically written as

$$\frac{\partial \mathbf{u}}{\partial t} + \mathbf{u} \cdot \nabla \mathbf{u} = -\nabla p + Nb \mathbf{e}_v + \nu \nabla^2 \mathbf{u} \quad (2.1a)$$

$$\frac{\partial b}{\partial t} + \mathbf{u} \cdot \nabla b = -N \mathbf{u} \cdot \mathbf{e}_v + \kappa \nabla^2 b, \quad (2.1b)$$

where $\mathbf{u}$ is the three-dimensional velocity vector satisfying the incompressible condition, $\nabla \cdot \mathbf{u} = 0$, p is the pressure divided by the reference density, b is the buoyancy, N is the background buoyancy frequency set as a constant, ν is the kinematic viscosity, κ is the diffusivity, and $\mathbf{e}_v$ is the unit vector pointing upwards. Here, b is scaled so as to have the unit of velocity and related to the fluid density, ρ , as $\rho = \rho_{ref}(1 - N^2 X_3/g - Nb/g)$, where g is the acceleration of gravity, ρ_{ref} is the reference density, and X_3 is the vertical coordinate.

We envisage a plane internal gravity wave propagating in a direction with an angle θ against the vertical direction. Let us assign the x_3 -axis to this direction, the x_1 -axis to the direction of the flow velocity, and the x_2 -axis perpendicular to them (figure 1a). In the following, velocity components along the x_1 -, x_2 -, and x_3 -axes are respectively represented as u_1 , u_2 , and u_3 . We may write the ordinary coordinates (X_1, X_2, X_3) , with X_3 pointing to $\mathbf{e}_v$, as $X_1 = x_1 \cos \theta + x_3 \sin \theta$, $X_2 = x_2$, $X_3 = -x_1 \sin \theta + x_3 \cos \theta$. Now, we assume $\nu = \kappa$ for simplicity, which allows a plane wave solution of (2.1) to be written down as

$$u_1 = U_0 e^{-\nu k^2 t} \sin(kx_3 - \omega t + \alpha) \equiv U(x_3, t) \quad (2.2a)$$

$$b = U_0 e^{-\kappa k^2 t} \cos(kx_3 - \omega t + \alpha) \equiv B(x_3, t) \quad (2.2b)$$

$$p = \frac{NU_0 \cos \theta}{k} e^{-\nu k^2 t} \sin(kx_3 - \omega t + \alpha) \equiv P(x_3, t) \quad (2.2c)$$

$$\omega = N \sin \theta \quad (2.2d)$$

and $u_2 = u_3 = 0$, where U_0 is the amplitude of the wave velocity, k is the wavenumber, and α is the initial phase factor that is arbitrarily chosen.

Next, we cut out a small domain from this wave field. By assuming that the wavelength is sufficiently larger than the domain size, i.e., taking the asymptotic limit of small k , we

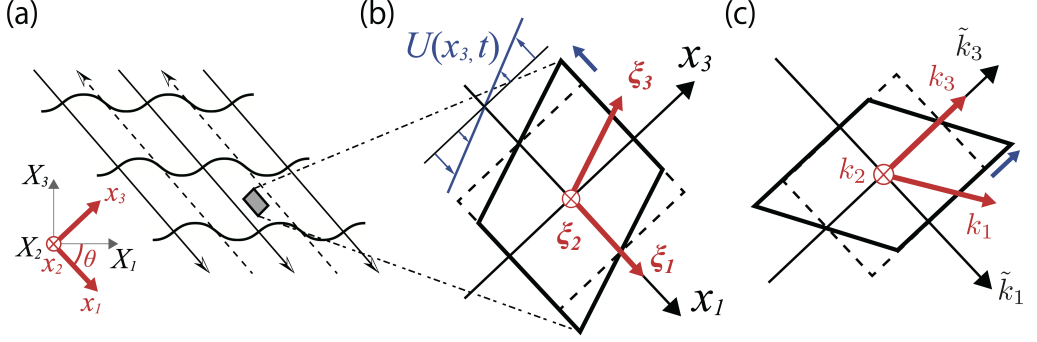


FIGURE 1. (a) We consider an internal gravity wave obliquely propagating in a stratified fluid. Thick black curves represent the isopycnal surfaces and the arrows indicate the direction of the flow velocity. A cartesian coordinate system, (x_1, x_2, x_3) , is arranged such that x_1 points to the direction of the flow velocity, x_3 to the velocity gradient, and x_2 perpendicular to them. (b) We cut out a small domain from the internal wave field, in which the velocity U is linear in x_3 and oscillates in time. A time-dependent coordinate system, (ξ_1, ξ_2, ξ_3) , that follows the background flow velocity is introduced. The shape of the model domain (thick parallelogram) is fixed in the ξ frame and hence periodically distorted. (c) The wavenumber coordinates, (k_1, k_2, k_3) , which are defined by taking Fourier transform with respect to (ξ_1, ξ_2, ξ_3) , also vary with time.

expand (2.2a) and (2.2b) as

$$U = -U_0 \sin(\omega t - \alpha) + \underbrace{S_0 \cos(\omega t - \alpha)}_{\equiv S(t)} x_3 + O(k^2) \quad (2.3a)$$

$$B = U_0 \cos(\omega t - \alpha) + \underbrace{S_0 \sin(\omega t - \alpha)}_{\equiv M(t)} x_3 + O(k^2), \quad (2.3b)$$

where $S_0 \equiv U_0 k$ represents the maximum velocity shear, and S and M are instantaneous velocity shear and buoyancy gradient. In this way, the plane wave solution can be locally reduced to an oscillating linear shear flow (figure 1b). The frequency of oscillation, ω , is linked to the propagation angle θ via the dispersion relation of internal gravity waves (2.2d).

Finally, we consider disturbances superimposed on this wave solution. Variables are rewritten as $(u_1, u_2, u_3, b, p) = (U + u'_1, u'_2, u'_3, B + b', P + p')$. Here, the disturbances are advected by the space- and time-dependent background flow, $U(x_3, t)$. To eliminate this passive advection effect from consideration, we introduce a time-dependent non-orthogonal coordinate system that moves following the background velocity as $\xi_1 = x_1 - \int U dt$, $\xi_2 = x_2$, $\xi_3 = x_3$ (see, again, figure 1b). The governing equations for the disturbance components are, consequently,

$$\frac{\partial u'_i}{\partial t} + \frac{\partial u'_j u'_i}{\partial \tilde{\xi}_j} + S \delta_{i1} u'_3 = -\frac{\partial p'}{\partial \tilde{\xi}_i} + N b' (\cos \theta \delta_{i3} - \sin \theta \delta_{i1}) + \nu \frac{\partial^2 u'_i}{\partial \tilde{\xi}_j \partial \tilde{\xi}_j} \quad (2.4a)$$

$$\frac{\partial b'}{\partial t} + \frac{\partial u'_j b'}{\partial \tilde{\xi}_j} + M u'_3 = -N (\cos \theta u'_3 - \sin \theta u'_1) + \kappa \frac{\partial^2 b'}{\partial \tilde{\xi}_j \partial \tilde{\xi}_j} \quad (2.4b)$$

$$\frac{\partial u'_j}{\partial \tilde{\xi}_j} = 0, \quad (2.4c)$$

where $\partial/\partial \tilde{\xi}_i \equiv \partial/\partial \xi_i - \int S dt \delta_{i3} \partial/\partial \xi_1$, i and j represent 1, 2 or 3, and the summation convention for repeated indices is used.

It is noteworthy that, when we neglect the nonlinear, viscosity, and diffusion terms,

the system of equations (2.4) reduces to the model proposed by Ghaemsaïdi & Mathur (2019). As shown by their stability analysis, of this model, several kinds of instability occur depending on the angle and the amplitude of the outer wave. Thus, the energy of the system is spontaneously amplified even without any external forcing term. Here, we shall call this process “local instability” of internal waves.

In the present system, budgets of the kinetic energy and the available potential energy are governed by

$$\frac{d}{dt} \underbrace{\left\langle \frac{u'_i u'_i}{2} \right\rangle}_{\mathcal{E}_K} = \underbrace{-S \langle u'_1 u'_3 \rangle}_{\mathcal{P}_K} + \underbrace{N \cos \theta \langle u'_3 b' \rangle - N \sin \theta \langle u'_1 b' \rangle}_{\mathcal{C}} - \underbrace{\nu \left\langle \frac{\partial u'_i}{\partial \tilde{\xi}_j} \frac{\partial u'_i}{\partial \tilde{\xi}_j} \right\rangle}_{\epsilon} \quad (2.5a)$$

$$\frac{d}{dt} \underbrace{\left\langle \frac{b'^2}{2} \right\rangle}_{\mathcal{E}_P} = \underbrace{-M \langle u'_3 b' \rangle}_{\mathcal{P}_P} + \underbrace{-N \cos \theta \langle u'_3 b' \rangle + N \sin \theta \langle u'_1 b' \rangle}_{-\mathcal{C}} - \underbrace{\kappa \left\langle \frac{\partial b'}{\partial \tilde{\xi}_j} \frac{\partial b'}{\partial \tilde{\xi}_j} \right\rangle}_{\epsilon_P}, \quad (2.5b)$$

where $\langle \rangle$ denotes the spatial averaging over the whole domain. From these expressions, we understand that the kinetic energy, $\mathcal{E}_K$, and the available potential energy, $\mathcal{E}_P$, are produced by the terms $\mathcal{P}_K$ and $\mathcal{P}_P$, respectively, exchanged through the term $\mathcal{C}$, and eventually dissipated in heat and background potential energies, at the rate of ϵ and ϵ_P , respectively. At variance with the vertically sheared horizontal flow cases, the sign of the $\mathcal{E}_K$ - $\mathcal{E}_P$ conversion rate $\mathcal{C}$ is not determined a priori; it depends on the relative magnitudes of production and dissipation terms.

In this study, equations (2.4) are numerically solved in the wavenumber domain $\mathbf{k}$ using the Fourier spectral method by assuming triply periodic boundary conditions with respect to ξ_j (not to X_j or x_j). Since the physical coordinates ξ_j now explicitly depend on time, the wavenumber coordinates also vary with time; specifically, when we write the wavenumber in the fixed frame as $\tilde{\mathbf{k}} = (\tilde{k}_1, \tilde{k}_2, \tilde{k}_3)$, the wavenumber for the moving frame $\mathbf{k} = (k_1, k_2, k_3)$ follows $k_1 = \tilde{k}_1, k_2 = \tilde{k}_2, k_3 = \tilde{k}_3 + \int S dt \tilde{k}_1$ (figure 1c). For the calculation, we basically follow the procedure by Chung & Matheou (2012); the viscous and diffusive terms are analytically solved by the integration factor method, the pressure terms are diagnosed at each step enforcing the incompressibility constraint. The remaining terms are integrated using the low-storage third-order Runge-Kutta scheme of Spalart *et al.* (1991). The aliasing errors are eliminated by the combination of wavenumber truncation and phase shifting. Different from the stationary shear cases, we do not remesh the grid during the calculation because the effect from grid skewing would be minor compared to the aliasing error arising from remeshing in the present settings. The calculation domain is a cubic box and the grid spacing is equivalent in all directions. To ensure the stability of calculation, as well as to sufficiently resolve buoyancy oscillation, the time step Δt is controlled via a modified form of the Courant-Friedrichs-Lewy condition such that $\Delta t \leq \min(1.83/\max(\mathbf{u} \cdot \mathbf{k}), 0.1/N)$.

Generally speaking, in stratified flows, vertically sheared large-scale horizontal motions emerge from a turbulent state (e.g., Chung & Matheou 2012). However, in our model, growth of such a flow structure is suppressed due to the following reason. As shown in figure 2, since the model domain is tilted and the periodic boundary condition connects each face to its opposite side, an isopycnal surface at some level connects to that at another level, such that $a \rightarrow a'$ and $b \rightarrow b'$. When we extend the area of this surface, it will fill in the whole domain if $\tan \theta$ is an irrational number. In this way, all the levels are kinematically connected. Therefore, this model does not allow the existence of a vertically sheared horizontally homogeneous motion. This thought also applies to the

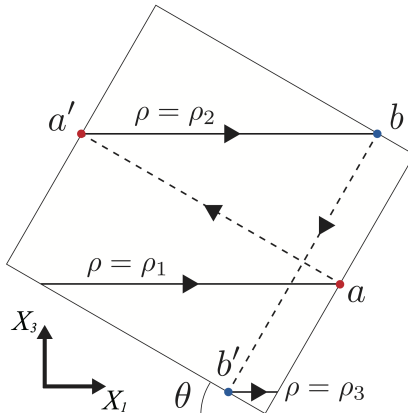


FIGURE 2. A side view of the model domain. The periodic boundary condition connects points, a to a' and b to b' . Accordingly, the isopycnal surfaces $\rho = \rho_1$, $\rho = \rho_2$ and $\rho = \rho_3$ are connected with each other.

density distribution. As is known, a turbulent patch in a homogeneously stratified fluid locally mixes the density gradient to generate a staircase structure. Then, signals of the disrupted stratification propagate along an isopycnal surface. In the present model, since all the isopycnal surfaces are connected through the periodic boundaries, the staircase structure is dispersed with time and eventually homogenised. From this property, we can conduct experiments without being concerned with the changes in the background stratification.

The non-dimensional control parameters in the experiments are the external Froude number, $Fr = S_0/N$, the external Reynolds number, $Re = S_0 L^2/\nu$, the Prandtl number, $Pr = \nu/\kappa$, and the wave frequency divided by the buoyancy frequency, ω/N . Here, we have introduced the domain length L , which is fixed to be 2π in our model. For thermally stratified ocean, Pr is around 7 but for simplicity it is set to unity here. The Reynolds number and the Froude number are now defined based on the external conditions and should be distinguished from those determined by the length and velocity scales of turbulence. In this study, we fix Re to be 300000 but vary Fr from 0.1 to 1.2. The wave frequency is set relatively high, $\omega/N = 0.6$, to avoid excessive distortion of the domain shape. The initial condition is a small isotropic Gaussian white noise added both for the velocity and buoyancy fields. According to Ghaemsaïdi & Mathur (2019), although the density overturn or the shear instability does not occur in the present parameter regime, disturbances are expected to be amplified through parametric subharmonic instability (PSI). To reduce the computation cost, the total number of grid points is first set as 512^3 with the spherical truncation of wavenumbers at the 241 mode, and later raised up to 1024^3 with the truncation at the 482 mode before the disturbance energy is fully developed.

A basic theory of PSI tells us that the instability growth rate is proportional to the amplitude of the background wave (Sonmor & Klaassen 1997), which corresponds to Fr in the present case. Therefore, the time required for the energy of the system to grow up would be roughly proportional to Fr^{-1} . We accordingly vary the total calculation time, t_{end} , as listed in Table 1. To quantify statistical properties of turbulence, we average data over $t_{\text{end}} - T < t \leq t_{\text{end}}$, where $T \equiv 2\pi/\omega$ is the period of the outer wave. It is noted that, although the system is expected to eventually reach a quasi-stationary state in each run, the high computational cost inhibits us from conducting experiments over

Fr	t_{end}	Re_b	Fr_t	$\epsilon_P/(\epsilon + \epsilon_P)$	$\mathcal{P}_P/(\mathcal{P}_K + \mathcal{P}_P)$	$\eta_K k_{\text{max}}$
0.1	85T	1.55	0.014	0.41	0.54	1.6
0.2	40T	4.74	0.036	0.38	0.55	1.7
0.3	32T	62.6	0.066	0.35	0.53	1.1
0.4	25T	32.5	0.078	0.34	0.61	1.5
0.5	19T	86.9	0.099	0.36	0.56	1.3
0.6	16T	47.8	0.105	0.37	0.62	1.6
0.7	13T	43.1	0.057	0.37	0.78	1.8
0.8	12T	188	0.088	0.40	0.95	1.3
0.9	11T	475	0.178	0.45	0.70	1.1
1.0	9T	611	0.212	0.44	0.67	1.1
1.1	8T	373	0.090	0.47	1.08	1.3
1.2	7T	571	0.173	0.47	0.61	1.2

TABLE 1. Values of the control parameter $Fr \equiv S_0/N$, the total calculation time t_{end} , and the dimensionless quantities obtained in each run. Here, $Re_b \equiv \epsilon/(\nu N^2)$ is the buoyancy Reynolds number, $Fr_t \equiv \epsilon/(N\mathcal{E}_K)$ is the turbulent Froude number, and $\eta_K \equiv (\nu^3/\epsilon)^{1/4}$ is the Kolmogorov scale. To obtain ϵ , ϵ_P , $\mathcal{E}_K$, $\mathcal{P}_K$, and $\mathcal{P}_P$, temporal averages are taken over $t_{\text{end}} - T < t \leq t_{\text{end}}$.

a so long period. We inevitably admit the existence of some deviations in our data from the genuine long-term means.

To ensure the sufficiency of model resolution, we check the Kolmogorov scale $\eta_K = (\nu^3/\epsilon)^{1/4}$ and the Ozmidov scale $\eta_O = (\epsilon/N^3)^{1/2}$, which are the lower and upper bounds of the range of isotropic turbulence. Then, we confirm that both are resolved in all experiments. For example, we show in Table 1 the values of $\eta_K k_{\text{max}}$, the Kolmogorov scale multiplied by the maximum wavenumber, which should be larger than 1 according to de Bruyn Kops & Riley (1998).

3. Results

We demonstrate the simulation results of a specific case, $Fr = 0.4$, to reveal the basic mechanisms of turbulence enhancement in the model. The time evolutions of $\mathcal{E}_K$, $\mathcal{E}_P$, and their sum are shown in figure 3a. After a rapid decay within a couple of wave periods of both the kinetic and available potential energies due to viscosity and diffusivity, they are exponentially enhanced while periodically exchanging energy. The step-like behavior of the total energy results from the oscillation in its production rates, $\mathcal{P}_K + \mathcal{P}_P$. At around $t \sim 18T$, the enhancement is retarded and will gradually reach a saturation level.

Figure 3b-d show snapshots of the buoyancy perturbation b' on the surface of the calculation domain at $t = 15T, 18T$, and $25T$. A notable feature is the striped pattern appearing during the stage of exponential energy growth (figure 3b). To discuss the mechanism of energy enhancement, we show in figure 3e-f the energy spectra in the horizontal and vertical section at each stage. According to the dispersion relation of internal gravity waves, the angle of the wave vector against the vertical axis ϕ determines the wave frequency as $\sigma = N \sin \phi$. In figure 3e, we find energy concentration along the line $N \sin \phi = \omega/2$. This result indicates that the subharmonic component of the outer wave is selectively excited and, consequently, the striped pattern that is perpendicular to these wave vectors is made visible. Going back to figure 3a, one may notice the exchange of $\mathcal{E}_K$ and $\mathcal{E}_P$ occurring with the same frequency as that of the outer wave, which indicates the oscillatory motion of disturbances with half the frequency of the outer wave. All of these features are evidence that disturbance waves are excited by PSI.

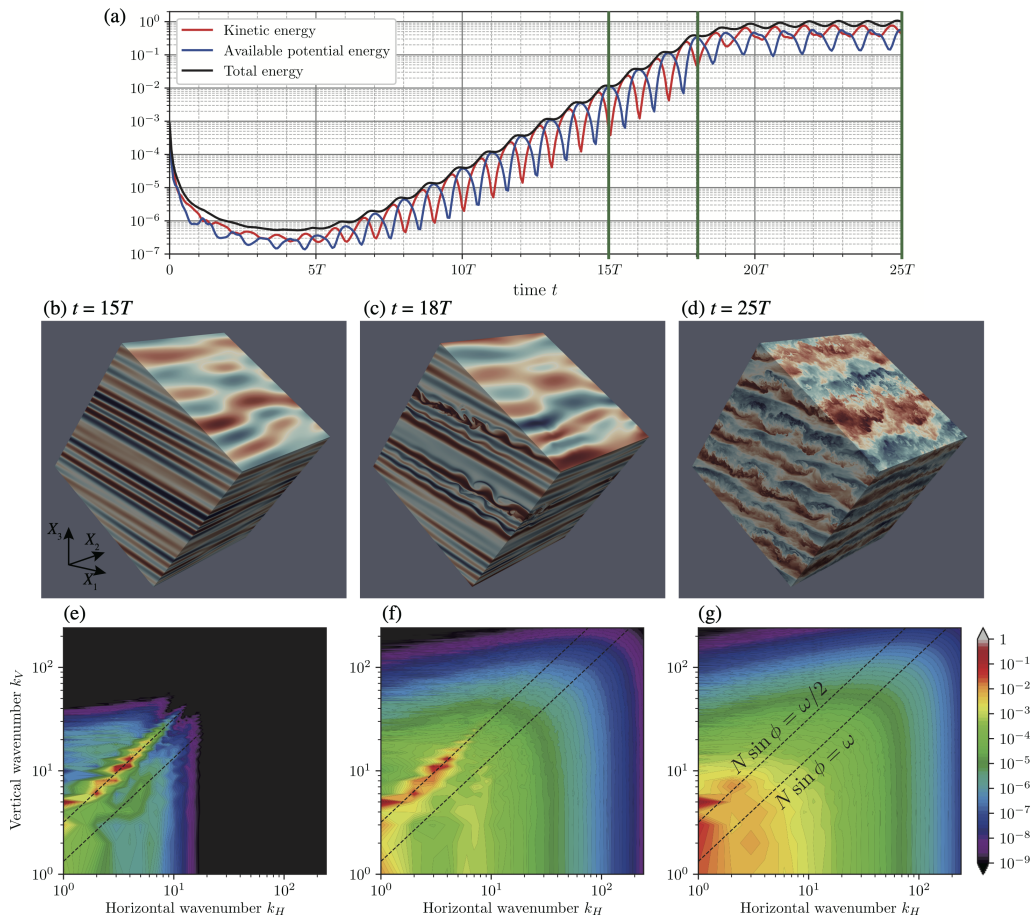


FIGURE 3. Results of the experiment with $Fr = 0.4$. (a) Time series of the kinetic energy (red), the available potential energy (blue), and their sum (black). They are normalised such that the total energy becomes 1 at the end of the experiment. The vertical green lines indicate $t = 15T, 18T$, and $25T$, the times that the following panels correspond to. (b)-(d) Buoyancy perturbation b' on the surface of the calculation domain at $t = 15T$ (b), $18T$ (c), and $25T$ (d). Red and blue correspond to positive and negative values. (e)-(g) Energy spectra in the horizontal and vertical wavenumber space, $E(k_H, k_V)$, at $t = 15T$ (e), $18T$ (f), and $25T$ (g). Here, k_H indicates the wavenumber against the horizontal directions, X_1 and X_2 , and k_V indicates that of the vertical direction, X_3 . The spectra are integrated over the azimuthal angle and normalised such that $\int E(k_H, k_V) dk_H dk_V = 1$. The black dotted lines indicate $N \sin \phi = \omega$ and $N \sin \phi = \omega/2$, where ϕ is the angle of the wave vector against the vertical axis.

To investigate the stability of PSI-induced disturbance waves, we analyse the gradient Richardson number,

$$Ri = \frac{-\frac{g}{\rho_{ref}} \frac{\partial \rho}{\partial X_3}}{\left| \frac{\partial \mathbf{u}_H}{\partial X_3} \right|^2}, \quad (3.1)$$

where $\mathbf{u}_H = (u_1 \cos \theta + u_3 \sin \theta, u_2)$ is the horizontal velocity vector. In general, the sufficient condition for shear instability is that $0 < Ri < 0.25$ is satisfied somewhere in the domain while static instability occurs when $Ri < 0$. Figure 4 shows the time

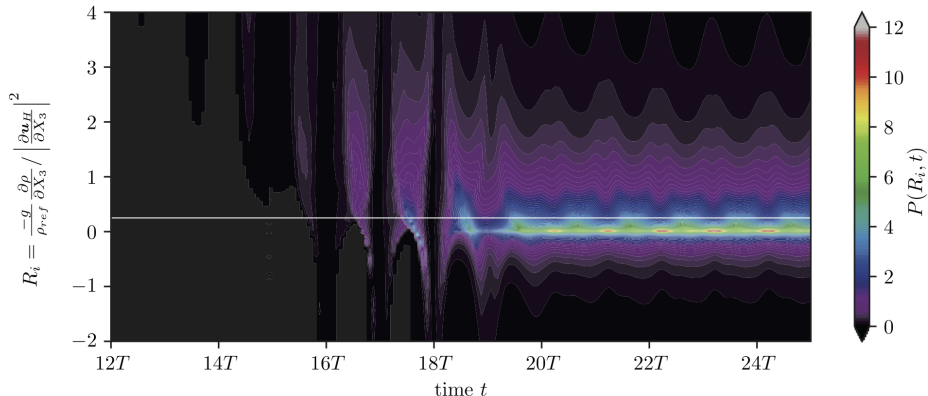


FIGURE 4. The time series of the probability density function of the gradient Richardson number, Ri , for the $Fr = 0.4$ experiment. The probability density function, $P(Ri, t)$, is normalised such that $\int P(Ri, t) dRi = 1$. The white horizontal line indicates $Ri = 0.25$.

series of the probability density function (PDF) of Ri . Around $t = 15.5T$, the values of Ri reach lower than 0.25 and even negative values. A short time later in $17.5T < t < 18T$, higher concentration of PDF below 0.25 becomes seen. At this stage, secondary instabilities manifest as undulating patterns in the buoyancy field (a result at $t = 18T$ is shown in figure 3c). Koudella & Staquet (2006) argued that, for parametrically excited internal waves, the growth rate of static instability is larger than that of shear instability. According to their theoretical prediction, the fastest growing mode of static instability would be vortices the axes of which are aligned to the direction of the sheared flow. However, in the present experiment, as well as such predicted patterns, undulations whose crests are perpendicular to the direction of the sheared flow are visible. We further point out that this pattern is similar to that generated by the Kelvin-Helmholtz instability. From these results, it is speculated that both the density overturn and the strong shear cooperatively work to break the disturbance waves. As a result, the energy accumulated in the low-wavenumber region is abruptly transferred to high-wavenumber components (figure 3f).

After a sufficiently long time (figure 3d, g), a smooth and nearly isotropic energy spectrum is formed, except for the lowest-wavenumber region, where anisotropic structures are maintained such that the PSI continues to supply energy into the system. At this stage, velocity shear is dominated by the highest-wavenumber components that are hardly affected by stratification. That is why the probability density of Ri is concentrating very close to $Ri = 0$ (figure 4). For a better visualisation, please also see the supplementary movie that shows buoyancy perturbation on the domain surface across the phases of the onset of PSI, secondary instabilities, and the fully developed turbulence.

Even in other experiments with various Fr , the process is essentially the same; first, specific low-wavenumber components are selectively amplified and, next, secondary instability redistributes energy across spectral space to the smallest scales.

4. Discussion

The relative importance between the production rates of available potential energy and kinetic energy is quantified by evaluating $\mathcal{P}_P / (\mathcal{P}_K + \mathcal{P}_P)$. As shown in Table 1, this ratio is always greater than 0.5. Thus, we derive $\mathcal{P}_P > \mathcal{P}_K$; i.e., the instability mainly causes the production of available potential energy. We next analyse the fraction

of dissipation rates of available potential energy in the total energy loss, or the so-called mixing efficiency, $\epsilon_P/(\epsilon + \epsilon_P)$. This value is, on the other hand, always less than 0.5 so that $\epsilon > \epsilon_P$ holds; i.e., the kinetic energy dissipation rate overwhelms the available potential energy dissipation rate. These contrasting results indicate that part of available potential energy injected from the outer wave is converted into the kinetic energy and dissipated in heat. Figure 5a shows the mixing coefficient $\Gamma = \epsilon_P/\epsilon$ as a function of $Fr = S_0/N$. Compared to $\Gamma = 0.2$ that has been traditionally assumed for the ocean (Gregg *et al.* 2018), the present results that always hold $\Gamma > 0.5$ are substantially larger. Except for $Fr \leq 0.2$ cases, Γ tends to increase in accordance with Fr and becomes close to 1 in $Fr > 1.0$ cases. It should be kept in mind that, when Fr is small, effects from viscosity and diffusivity become relatively large, possibly leading to the property of small-scale turbulence being much different from the large Fr cases. In general, effect from viscosity to stratified turbulence can be judged from buoyancy Reynolds number, $Re_b = \epsilon/(\nu N^2)$, which is equivalent to $(\eta_O/\eta_K)^{4/3}$. As shown in Table 1, in the cases of $Fr = 0.1$ and 0.2 , Re_b is of the order of unity, so that the inertial subrange where isotropic turbulence exists collapses. This peculiarity might cause the exceptional behavior of Γ for these cases.

Recently, by analysing various DNS experimental data, Maffioli *et al.* (2016) and Garanaik & Venayagamoorthy (2019), hereafter referred to as MBL16 and GV19, respectively, suggested that the turbulent Froude number, defined as $Fr_t \equiv \epsilon/(NU^2)$, where U is the typical velocity of turbulence, would be a good indicator of the mixing coefficient. MBL16 classified states of stratified turbulence into two categories; for $Fr_t \gg 1$, $\Gamma \propto Fr_t^{-2}$, and for $Fr_t \ll 1$, $\Gamma \propto Fr_t^0$. Subsequently, GV19 suggested an intermediate range, $\Gamma \propto Fr_t^{-1}$ for $Fr_t \sim O(1)$. Their scatter plot indicates that, when Fr_t is sufficiently small, Γ seems to increase slightly with Fr_t . In this study, by regarding $\mathcal{E}_K$ as U^2 , we estimate the turbulent Froude number in each run. As figure 5b shows, Fr_t is no greater than 0.21 and Γ exhibits a slight increasing trend with Fr_t , which is partly consistent with the previous results. More classically, Re_b that involves the effect from viscosity is known to be a candidate for the indicator of Γ (Gregg *et al.* 2018). Figure 5a also exhibits a tendency for Γ to increase with Re_b , but since Re_b is inevitably correlated with Fr in the current settings, causality is still uncertain. Here, we caution that, since the vertical density gradient as well as ϵ and $\mathcal{E}_K$ vary periodically in time, instantaneous values of Re_b and Fr_t fluctuate by several factors. Averaging over a wave period is essential to get a robust estimate of scaling relationships.

Ijichi & Hibiya (2018) reported that the mixing efficiency in the deep ocean depends on the ratio of the Ozmidov scale to the Thorpe scale, $R_{OT} = \eta_O/\eta_T$. The Thorpe scale, η_T , is the typical size of density overturns in stratified turbulence. One can estimate η_T by sorting instantaneous vertical density profiles and calculating the root-mean-square value of the displacements of fluid particles between sorted and unsorted profiles. In this study, we extract 800 samples of vertical density profiles within $t_{\text{end}} - T < t \leq t_{\text{end}}$ from each run to calculate η_T . From a scatter plot of R_{OT} and Γ shown in figure 6a, we cannot confirm a clear functional relationship between them. On the other hand, as shown in figure 6b, we find a significant positive correlation between R_{OT} and Fr_t . In fact, if η_T is identified with the Ellison scale, η_E , these results are again consistent with the arguments by GV19, who found the scaling relationships of $Fr_t \propto (\eta_E/\eta_O)^{-2}$ and $\Gamma \propto (\eta_E/\eta_O)^0$ for $Fr_t \ll 1$. We note that the scaling of Ijichi & Hibiya (2018) is consistent with that of GV19 for $Fr_t \gg 1$.

Overall, our results agree with MBL16 and GV19 in the point of scaling relationships between Γ , Fr_t and R_{OT} . However, compared to the saturation level of $\Gamma \sim 0.5$ for the regime of $Fr \ll 1$ shown by the previous studies, those we obtain here are larger by a factor of about two. A difference in the situations between the previous ones and

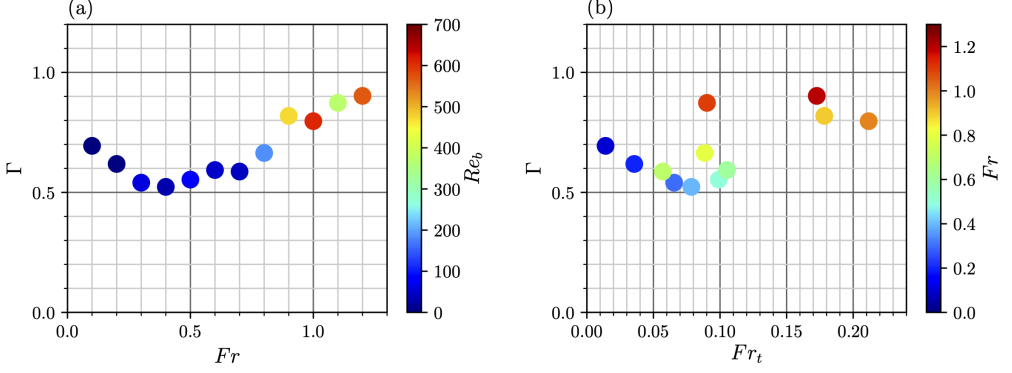


FIGURE 5. (a) Mixing coefficient $\Gamma \equiv \epsilon_P/\epsilon$ as a function of (external) Froude number $Fr \equiv S_0/N$. The color represents buoyancy Reynolds number $Re_b \equiv \epsilon/(\nu N^2)$. (b) Mixing coefficient Γ as a function of turbulent Froude number $Fr_t \equiv \epsilon/(N\mathcal{E}_K)$. The color represents Fr . Here, the energy dissipation rates ϵ and ϵ_P and the kinetic energy density $\mathcal{E}_K$ are obtained by averaging each over $t_{\text{end}} - T < t \leq t_{\text{end}}$.

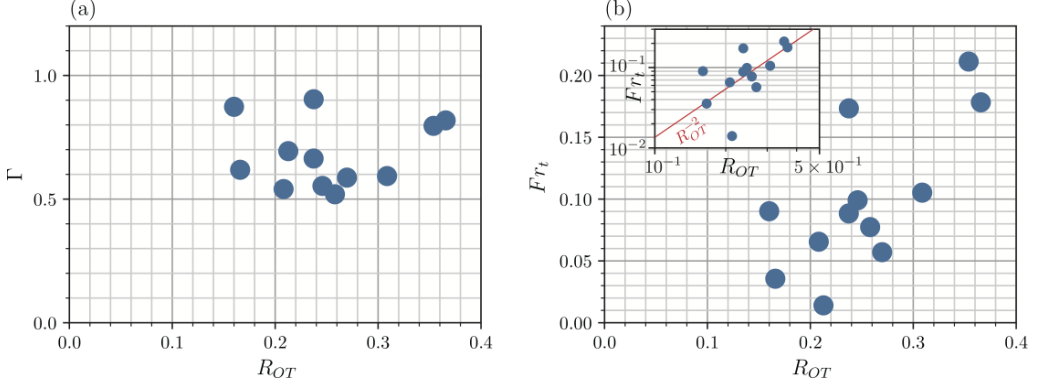


FIGURE 6. (a) Mixing coefficient $\Gamma \equiv \epsilon_P/\epsilon$ as a function of the ratio of the Ozmidov scale to the Thorpe scale, $R_{OT} = \eta_O/\eta_T$. (b) Turbulent Froude number $Fr_t \equiv \epsilon/(N\mathcal{E}_K)$, as a function of R_{OT} (the inset shows a log-log plot). Here, the energy dissipation rates ϵ and ϵ_P and the kinetic energy density $\mathcal{E}_K$ are obtained by averaging each over $t_{\text{end}} - T < t \leq t_{\text{end}}$. To estimate the Thorpe scale, we extract 800 samples of vertical density profile data within $t_{\text{end}} - T < t \leq t_{\text{end}}$.

ours is the source of turbulence energy. The past works used three kinds of data sets of DNS experiments: freely decaying turbulence, forced turbulence, and sheared stratified turbulence. In every case, energy is initially injected to kinetic energy and only in a second stage part of it is converted to available potential energy to mix the stratification. In the present case, on the other hand, kinetic energy and available potential energy are simultaneously enhanced by PSI and the latter is directly used for mixing. From the viewpoint of energetics, this process is intermediate between the conventional shear instability that is caused by the conversion from mean to turbulent kinetic energy and the convection caused by release of available potential energy. Taking into account the fact that in free convection the mixing coefficient occasionally exceeds 1.0 (Davies Wykes & Dalziel 2014), we can conclude that the result in our experiments, $0.5 < \Gamma < 1.0$, which connects the regimes of vertical shear-induced mixing and convectively driven mixing, is reasonable.

5. Concluding remarks

In this study, we have developed a new technique for direct numerical simulation (DNS) of stratified turbulence generated by instability of internal gravity waves. A novelty of our method is to distort the model domain obliquely and periodically to simulate a turbulence enhancement due to unresolved large-scale internal waves while fully resolving the smallest-scale energy dissipation range. We use the term “local instability” to represent the exponential amplification of disturbance energy in an asymptotically large-scale internal wave. Attention is paid to the small-Froude number regime where the parametric subharmonic instability (PSI) excites a striped pattern of disturbance waves. When the amplitude of the disturbance waves grows sufficiently large, density overturn and strong shear induce secondary instabilities that transfer energy to much smaller-scale fluctuations, resulting in an efficient turbulent mixing.

The scaling relationship between the turbulent Froude number, Fr_t , and the mixing coefficient, Γ , proposed by Maffioli *et al.* (2016) is tested. Our result is in part consistent with their argument; for $Fr_t \ll 1$, Γ is $O(1)$ and may slightly depend on Fr_t . However, we have obtained a surprisingly high mixing efficiency; the value of Γ here is larger by a factor of about two than the previous ones. This discrepancy might be related to the difference in energy source. We suppose that when the available potential energy of turbulence is directly supplied from large-scale fluid motion rather than converted from turbulent kinetic energy, it is more efficiently used for vertical mixing. This thought agrees with Ijichi *et al.* (2020), who found values as large as $\Gamma = 0.8$ near the sea floor in the Brazil Basin where hydraulic overflows are thought to cause convection, and also with the latest DNS study by Howland *et al.* (2020). In conclusion, we should not consider that the mixing efficiency is parameterised solely from a single parameter, Fr_t , but always pay attention to the mechanisms of turbulence generation.

Throughout this study, we have assumed that the turbulence is continuously driven by a harmonically oscillating wave shear that maintains constant amplitude. In the real ocean, a situation where coherent internal tides dominate the internal wave spectra may satisfy this condition. Investigating mixing caused by rather sporadic wave radiation from surface wind force requires reexamination of the model configuration. Besides, since our model does not include the Coriolis force, the present scenario of turbulence generation and large values of Γ may apply to limited cases when the wave frequency is much higher than the local inertial frequency, i.e., internal tides in the equatorial area. To discuss wave-driven mixing in mid and high latitudes, we should not neglect the rotation because it will change the partitioning of kinetic and available potential energies. Specifically, a linear theory of internal inertia-gravity waves yields the following relationship; (kinetic energy)/(available potential energy) = $(1 - \omega^2/N^2)(\omega^2 + f^2)/(\omega^2 - f^2)$, where ω is the wave frequency and f is the Coriolis parameter (Polzin & Lvov 2011). Consequently, as for near-inertial waves, $\omega \sim f$, a large part of energy is contained in the kinetic part so that the mixing efficiency is expected to be lowered. In the real ocean, it has been reported that PSI plays a special role in transferring energy of internal tides into near-inertial waves (Hibiya & Nagasawa 2004). Therefore, in order to get a better insight into the wave-driven ocean mixing, it is vital in future research to examine how rotation affects the energy budgets of both the internal waves and turbulence.

Acknowledgements

The authors express their gratitude to three anonymous reviewers for their invaluable comments on the original manuscript. This research was supported by JSPS KAKENHI

Grant JP18H04918 and JP20K14556. This work was supported by the grant ANR-17-CE30-0003 (DisET) and by a grant from the Simons Foundation (651475, TD). Numerical calculation was conducted using the Fujitsu PRIMERGY CX600M1/CX1640M1 (Oakforest-PACS) at the Information Technology Center of the University of Tokyo.

Declaration of interests

The authors report no conflict of interest.

REFERENCES

- ACHATZ, U. 2007 Gravity-wave breaking: Linear and primary nonlinear dynamics. *Advances in Space Research* **40** (6), 719–733.
- BOURUET-AUBERTOT, P., KOUDELLA, C., STAQUET, C. & WINTERS, K. B. 2001 Particle dispersion and mixing induced by breaking internal gravity waves. *Dynamics of Atmospheres and Oceans* **33** (2), 95–134.
- DE BRUYN KOPS, S. M. & RILEY, J. J. 1998 Direct numerical simulation of laboratory experiments in isotropic turbulence. *Physics of Fluids* **10** (9), 2125–2127.
- CAULFIELD, C. P. 2021 Layering, instabilities, and mixing in turbulent stratified flows. *Annual Review of Fluid Mechanics* **53** (1), 113–145.
- CHUNG, D. & MATHEOU, G. 2012 Direct numerical simulation of stationary homogeneous stratified sheared turbulence. *Journal of Fluid Mechanics* **696**, 434–467.
- DAUXOIS, T., PEACOCK, T., BAUER, P., CAULFIELD, C. P., CENEDESE, C., GORLÉ, C., HALLER, G., IVEY, G. N., LINDEN, P. F., MEIBURG, E., PINARDI, N. & WOODS, A. 2021 Confronting grand challenges in environmental fluid dynamics. *Physical Review Fluids* *in press*.
- DAVIES WYKES, M. S. & DALZIEL, S. B. 2014 Efficient mixing in stratified flows: experimental study of a Rayleigh-Taylor unstable interface within an otherwise stable stratification. *Journal of Fluid Mechanics* **756**, 1027–1057.
- FRITTS, D. C., VADAS, S. L., WAN, K. & WERNE, J. A. 2006 Mean and variable forcing of the middle atmosphere by gravity waves. *Journal of Atmospheric and Solar-Terrestrial Physics* **68** (3), 247–265.
- FRITTS, D. C., WANG, L., GELLER, M. A., LAWRENCE, D. A., WERNE, J. & BALSLEY, B. B. 2016 Numerical modeling of multiscale dynamics at a high Reynolds number: instabilities, turbulence, and an assessment of Ozmidov and Thorpe scales. *Journal of the Atmospheric Sciences* **73** (2), 555–578.
- FRITTS, D. C., WANG, L. & WERNE, J. 2009a Gravity wave-fine structure interactions: A reservoir of small-scale and large-scale turbulence energy. *Geophysical Research Letters* **36** (19), L19805.
- FRITTS, D. C., WANG, L., WERNE, J., LUND, T. & WAN, K. 2009b Gravity wave instability dynamics at high Reynolds numbers. Part I: Wave field evolution at large amplitudes and high frequencies. *Journal of the Atmospheric Sciences* **66** (5), 1126–1148.
- FRITTS, D. C., WANG, L., WERNE, J., LUND, T. & WAN, K. 2009c Gravity wave instability dynamics at high Reynolds numbers. Part II: Turbulence evolution, structure, and anisotropy. *Journal of the Atmospheric Sciences* **66** (5), 1149–1171.
- GARANAİK, A. & VENAYAGAMOORTHY, S. K. 2019 On the inference of the state of turbulence and mixing efficiency in stably stratified flows. *Journal of Fluid Mechanics* **867**, 323–333.
- GHAEMSAIDI, S. J. & MATHUR, M. 2019 Three-dimensional small-scale instabilities of plane internal gravity waves. *Journal of Fluid Mechanics* **863**, 702–729.
- GREGG, M. C., D’ASARO, E. A., RILEY, J. J. & KUNZE, E. 2018 Mixing efficiency in the ocean. *Annual Review of Marine Science* **10** (1), 443–473.
- HIBIYA, T. & NAGASAWA, M. 2004 Latitudinal dependence of diapycnal diffusivity in the thermocline estimated using a finescale parameterization. *Geophysical Research Letters* **31** (1), L01301.
- HOWLAND, C. J., TAYLOR, J. R. & CAULFIELD, C. P. 2020 Mixing in forced stratified

- turbulence and its dependence on large-scale forcing. *Journal of Fluid Mechanics* **898**, A7.
- IJICHI, T. & HIBIYA, T. 2018 Observed variations in turbulent mixing efficiency in the deep ocean. *Journal of Physical Oceanography* **48** (8), 1815–1830.
- IJICHI, T., ST. LAURENT, L., POLZIN, K. L. & TOOLE, J. M. 2020 How variable is mixing efficiency in the abyss? *Geophysical Research Letters* **47** (7), e2019GL086813.
- INOUE, R. & SMYTH, W. D. 2009 Efficiency of mixing forced by unsteady shear flow. *Journal of Physical Oceanography* **39** (5), 1150–1166.
- KOUDELLA, C. R. & STAQVET, C. 2006 Instability mechanisms of a two-dimensional progressive internal gravity wave. *Journal of Fluid Mechanics* **548** (10), 165–196.
- LOMBARD, P. N. & RILEY, J. J. 1996 On the breakdown into turbulence of propagating internal waves. *Dynamics of Atmospheres and Oceans* **23** (1), 345–355.
- MACKINNON, J. A., ZHAO, Z., WHALEN, C. B., WATERHOUSE, A. F., TROSSMAN, D. S., SUN, O. M., ST. LAURENT, L. C., SIMMONS, H. L., POLZIN, K. & PINKEL, R. *et al.* 2017 Climate process team on internal wave-driven ocean mixing. *Bulletin of the American Meteorological Society* **98** (11), 2429–2454.
- MAFFIOLI, A., BRETHOUWER, G. & LINDBORG, E. 2016 Mixing efficiency in stratified turbulence. *Journal of Fluid Mechanics* **794**, R3.
- MUNK, W. & WUNSCH, C. 1998 Abyssal recipes II: Energetics of tidal and wind mixing. *Deep Sea Research Part I* **45** (12), 1977–2010.
- OSBORN, T. R. 1980 Estimates of the local rate of vertical diffusion from dissipation measurements. *Journal of Physical Oceanography* **10** (1), 83–89.
- POLZIN, K. L. & LVOV, Y. V. 2011 Toward regional characterizations of the oceanic internal wavefield. *Reviews of Geophysics* **49** (4).
- PORTWOOD, G. 2019 A study on homogeneous sheared stably stratified turbulence. PhD Thesis, University of Massachusetts Amherst.
- ROGALLO, R. S. 1981 Numerical experiments in homogeneous turbulence. *NASA Tech. Rep.* (81315).
- SALEHIPOUR, H., CAULFIELD, C. P. & PELTIER, W. R. 2016 Turbulent mixing due to the Holmboe wave instability at high Reynolds number. *Journal of Fluid Mechanics* **803**, 591–621.
- SMYTH, W. D., MOUM, J. N. & CALDWELL, D. R. 2001 The efficiency of mixing in turbulent patches: Inferences from direct simulations and microstructure observations. *Journal of Physical Oceanography* **31** (8), 1969–1992.
- SONMOR, L. J. & KLAASSEN, G. P. 1997 Toward a unified theory of gravity wave stability. *Journal of the Atmospheric Sciences* **54** (22), 2655–2680.
- SPALART, P. R., MOSER, R. D. & ROGERS, M. M. 1991 Spectral methods for the Navier-Stokes equations with one infinite and two periodic directions. *Journal of Computational Physics* **96** (2), 297–324.
- THORPE, S. A. 2005 *The Turbulent Ocean*. Cambridge University Press.