A Single-Step Characteristic-Curve Finite Element Scheme of Second Order in Time for the Incompressible Navier-Stokes Equations

Notsu, Hirofumi
Faculty of Mathematics, Kyushu University

Tabata, Masahisa
Faculty of Mathematics, Kyushu University

https://hdl.handle.net/2324/9351

A characteristic-curve finite element scheme of single step and second order in time increment for the Navier-Stokes equations

H. Notsu & M. Tabata

Faculty of Mathematics
Kyushu University
Fukuoka, JAPAN

A Characteristic-Curve Finite Element Scheme of Single Step and Second Order in Time Increment for the Navier-Stokes Equations

Hirofumi NOTSU[*] and Masahisa TABATA[†]

Faculty of Mathematics, Kyushu University, Fukuoka 812-8581, Japan

Abstract

In this paper we present a new characteristic-curve finite element scheme of single step and second order in time increment for the nonstationary Navier-Stokes equations. After supplying correction terms in the variational formulation, we prove that the scheme is of second order in time increment. The convergence rate of the scheme is numerically recognized by computational results.

1 Introduction

In this paper we present a characteristic-curve finite element scheme of single step and second order in time increment for the Navier-Stokes equations. In devising numerical schemes for the Navier-Stokes equations, a key issue is how to approximate the nonlinear convection term. Especially it is crucial in the computation of high-Reynolds number problems, where the standard Galerkin approximation leads to disastrous oscillating results. Many kinds of approximations have been developed based on ideas such as upwinding, streamline diffusion, least square, characteristic curve, and so on. (See [1] , [3], [4] , [5] , [7] , [8] , [11] , [12] , [13], [14], [15], [16], [19] , [20] , [22] , [25] and references there in).

We focus on the approximation based on characteristic-curve method. The idea of the characteristic-curve method is to consider the trajectory of the fluid particle and discretize the material derivative term along the trajectory. The procedure is natural from the physical point of view. Furthermore, the matrix for the system of linear equations is symmetric, which leads to easy solvers for the system. Characteristic-curve finite element schemes for the Navier-Stokes equations of first order in time increment have been developed and analysed, see [14], [15], [19]. A scheme of second order in time increment has been presented and analysed by Boukir et al. [5]. They use a two-step method and approximate the material derivative by the values of two previous steps along the trajectory.

Here we propose a scheme of second order in time increment and of single step. The material derivative is approximated in the Crank-Nicolson way along the trajectory. The original idea of the approximation was developed in [17] for the convection-diffusion equations, which is extended to the Naveir-Stokes equations in this paper. As is pointed out in [17], in the Crank-Nicolson approximation on the trajectory, an additional correction term is indispensable to realize a second order accuracy. After supplying correction terms for the Navier-Stokes equations, the scheme is proved to be of second order in time increment. In the case of the Navier-Stokes equations the velocity is unknown and the obtained scheme becomes nonlinear. For the solution we present an internal iteration procedure which consists of solving a series of Stokes type equations. The scheme has such advantages that it is of second order in time increment and that every matrix to be treated is symmetric.

We use the function spaces $L^2(\Omega)$ and $H^1(\Omega)$, and their subspaces $H_0^1(\Omega)$ and

$$L_0^2(\Omega) \equiv \left\{ \phi \in L^2(\Omega); \int_\Omega \phi \, dx = 0 \right\}.$$

[*]notsu@math.kyushu-u.ac.jp

[†]tabata@math.kyushu-u.ac.jp

We denote by $(\cdot,\cdot)$ the $L^2(\Omega)$-inner products in the scalar- and vector-valued function spaces. For any normed space X the norm is denoted by $\|\cdot\|_X$. When $X = L^2(\Omega)^d$ or $L^2(\Omega)$, we omit the subscript and denote it simply by $\|\cdot\|$. The dual pairing between X and the dual space X' is denoted by $\langle\cdot,\cdot\rangle$. The partial derivative $\partial u/\partial x_i$ of a function u is simply denoted by $u_{,i}$ and the Einstein convention $a_i b_i$ is used in place of $\sum_{i=1}^{d} a_i b_i$.

The outline of the paper is as follows. We present a characteristic-curve finite element scheme for the Navier-Stokes equations in Section 2. In Section 3 the consistency of the scheme is proved to be of second order in time increment. In the last section we show some numerical examples to observe the convergence rate.

2 A Characteristic-Curve Finite Element Scheme

In this section we present a characteristic-curve finite element scheme for the Navier-Stokes equations. It is of single step and second order in time increment.

Let $\Omega \subset \mathbb{R}^d (d = 2,3)$ be a bounded domain and T be a positive constant. We consider the nonstationary Navier-Stokes problem subject to the homogeneous Dirichlet boundary condition; find $(u,p) : \Omega \times (0,T) \to \mathbb{R}^d \times \mathbb{R}$ such that

$$
\begin{cases}
\dfrac{\partial u}{\partial t} + (u\cdot\nabla)u - \nabla(2\nu D(u)) + \nabla p = f & \text{in } \Omega\times(0,T), \\
\nabla\cdot u = 0 & \text{in } \Omega\times(0,T), \\
u = 0 & \text{on } \Gamma\times(0,T), \\
u = u^0 & \text{in } \Omega, \text{ at } t = 0,
\end{cases}
\tag{2.1}
$$

where u is the velocity, p is the pressure, f is an exterior force, u^0 is an initial velocity, $\nu(>0)$ is a viscosity, $\Gamma \equiv \partial\Omega$ is the boundary of Ω, $D(u)$ is the strain-rate tensor defined by

$$
D_{ij}(u) \equiv \frac{1}{2}(u_{i,j} + u_{j,i}),
$$

and

$$
\bigl[\nabla(2\nu D(u))\bigr]_i \equiv 2\nu D_{ij,j}(u).
$$

In order to present our scheme for (2.1) we prepare the following. For a time increment Δt and velocities u and $w : \Omega \to \mathbb{R}^d$, we define $X_1(u,\Delta t)$ and $X_2(u,w,\Delta t)$ by

$$
X_1(u,\Delta t)(x) \equiv x - u(x)\Delta t,
$$

$$
X_2(u,w,\Delta t)(x) \equiv x - \bigl\{u(x) + w(x - w(x)\Delta t)\bigr\}\frac{\Delta t}{2},
$$

respectively. We use the symbol $\circ$ to designate the composition of functions, e.g., for a function ψ defined in Ω

$$
\Bigl(\psi \circ X_1(u,\Delta t)\Bigr)(x) \equiv \psi\bigl(x - u(x)\Delta t\bigr).
$$

For $n \in \mathbb{N} \cup \{0\}$ we set

$$
t^n \equiv \begin{cases}
\Delta t_0 + (n-1)\Delta t & (n \geq 1), \\
0 & (n = 0),
\end{cases}
$$

where Δt_0 is another time increment used only in the first step of the computation. Let $N_T \equiv [(T - \Delta t_0)/\Delta t] + 1$ be a total step number, $\mathscr{T}_h \equiv \{K\}$ be a triangulation of Ω. We define Ω_h by

$$
\Omega_h \equiv \text{int} \bigcup\{K;\ K \in \mathscr{T}_h\}
$$

and $\Gamma_h \equiv \partial\Omega_h$. We set finite element spaces,

$$X_h \equiv \left\{ v_h \in C^0(\overline{\Omega}_h)^d;\ v_h|_K \in P_2(K),\ \forall K \right\}, \quad V_h \equiv X_h \cap H_0^1(\Omega_h),$$
$$M_h \equiv \left\{ q_h \in C^0(\overline{\Omega}_h);\ q_h|_K \in P_1(K),\ \forall K \right\}, \quad Q_h \equiv M_h \cap L_0^2(\Omega_h),$$

$$(2.2)$$

and define interpolation operators,

$$\Pi_h^{(1)}:\ C^0(\overline{\Omega}_h) \to M_h, \quad \Pi_h^{(2)}:\ C^0(\overline{\Omega}_h)^d \to X_h.$$

For u, w and $\zeta \in H_0^1(\Omega_h)^d$, p and $q \in H^1(\Omega_h)$ and r, f and $g \in L^2(\Omega_h)$ we define linear forms $\mathscr{A}_{h1}(u,w,r)$, $\mathscr{A}_{h2}(u,\zeta,w,p,q)$, $\mathscr{F}_{h1}f$ and $\mathscr{F}_{h2}(f,g,w)$ on V_h and $\mathscr{B}_h u$ on Q_h by

$$\mathscr{A}_{h1}(u,w,r) \equiv \mathscr{M}_{h1}(u,w\ ;\Delta t_0) + \mathscr{D}_{h1}u + \mathscr{C}_{h1}r,$$
$$\mathscr{A}_{h2}(u,\zeta,w,p,q) \equiv \mathscr{M}_{h2}(u,\zeta,w\ ;\Delta t) + \mathscr{D}_{h2}(u,w) + \mathscr{C}_{h2}(w,p,q),$$
$$\left\langle \mathscr{B}_h u, q_h \right\rangle \equiv -\left(\nabla \cdot u, q_h \right), \quad \left\langle \mathscr{F}_{h1}f, v_h \right\rangle \equiv \left(f, v_h \right),$$
$$\left\langle \mathscr{F}_{h2}(f,g,w), v_h \right\rangle \equiv \frac{1}{2}\left(f + g \circ X_1(w,\Delta t), v_h \right),$$

where

$$\left\langle \mathscr{M}_{h1}(u,w\ ;\Delta t_0), v_h \right\rangle \equiv \left(\frac{u - w \circ X_1(w,\Delta t_0)}{\Delta t_0},\ v_h \right),$$
$$\left\langle \mathscr{M}_{h2}(u,\zeta,w\ ;\Delta t), v_h \right\rangle \equiv \left(\frac{u - w \circ X_2(\zeta,w,\Delta t)}{\Delta t},\ v_h \right),$$
$$\left\langle \mathscr{D}_{h1}u, v_h \right\rangle \equiv 2\nu\left(D(u), D(v_h) \right), \quad \left\langle \mathscr{C}_{h1}r, v_h \right\rangle \equiv -\left(\nabla \cdot v_h,\ r \right),$$
$$\left\langle \mathscr{D}_{h2}(u,w), v_h \right\rangle \equiv \nu\left(D(u) + D(w) \circ X_1(w,\Delta t),\ D(v_h) \right) + \nu\Delta t\left(D_{ij}(w)w_{k,j},\ v_{hi,k} \right),$$
$$\left\langle \mathscr{C}_{h2}(w,p,q), v_h \right\rangle \equiv \frac{1}{2}\left(\nabla p + \nabla q \circ X_1(w,\Delta t),\ v_h \right).$$

For $\{u^n\}_{n=0}^{N_T} \subset H_0^1(\Omega_h)^d$, $\{p^n\}_{n=1}^{N_T} \subset H^1(\Omega_h)$ and $\{f^n\}_{n=1}^{N_T} \subset L^2(\Omega_h)^d$, linear forms $\mathscr{A}_h^n(u,p)$ and $\mathscr{F}_h^n(f,u)$ on V_h are defined by

$$\mathscr{A}_h^n(u,p) \equiv \begin{cases} \mathscr{A}_{h2}(u^n, u^n, u^{n-1}, p^n, p^{n-1}) & (n \ge 2), \\ \mathscr{A}_{h1}(u^1, u^0, p^1) & (n = 1), \end{cases}$$
$$\mathscr{F}_h^n(f,u) \equiv \begin{cases} \mathscr{F}_{h2}(f^n, f^{n-1}, u^{n-1}) & (n \ge 2), \\ \mathscr{F}_{h1}f^1 & (n = 1). \end{cases}$$

In order to unify the notation we put $\mathscr{B}_h^n u \equiv \mathscr{B}_h u^n$. For a given continuous function f we set $f_h^n \equiv \Pi_h^{(2)} f(t^n)$.

We now present the scheme for (2.1); find $\{(u_h^n,\ p_h^n)\}_{n=1}^{N_T} \subset V_h \times Q_h$ such that

$$\begin{cases} \mathscr{A}_h^n(u_h, p_h) = \mathscr{F}_h^n(f_h, u_h) & \text{in } V_h', \\ \mathscr{B}_h^n u_h = 0 & \text{in } Q_h', \\ u_h^0 = \Pi_h^{(2)} u^0. \end{cases}$$

$$(2.3)$$

For $n \geq 2$ this is equivalent to the equations,

$$
\begin{cases}
\left(\dfrac{u_h^n - u_h^{n-1} \circ X_2(u_h^n, u_h^{n-1}, \Delta t)}{\Delta t},\ v_h\right) \\
\qquad + \nu\left(D(u_h^n) + D(u_h^{n-1}) \circ X_1(u_h^{n-1}, \Delta t),\ D(v_h)\right) + \nu\Delta t\left(D_{ij}(u_h^{n-1})u_{hk,j}^{n-1},\ v_{hi,k}\right) \\
\qquad + \dfrac{1}{2}\left(\nabla p_h^n + \nabla p_h^{n-1} \circ X_1(u_h^{n-1}, \Delta t),\ v_h\right) \\
\qquad = \dfrac{1}{2}\left(f_h^n + f_h^{n-1} \circ X_1(u_h^{n-1}, \Delta t),\ v_h\right), \qquad \forall v_h \in V_h, \\
\left(\nabla \cdot u_h^n,\ q_h\right) = 0, \qquad \forall q_h \in Q_h.
\end{cases}
$$

In the next section the scheme is shown to be of second order in Δt for $n \geq 2$, and of first order in Δt_0 for $n = 1$. By taking $\Delta t_0 = O(\Delta t^2)$, the whole scheme becomes of second order in time increment Δt.

Remark 2.1 (i) For $v_h \in V_h$ and $q_h \in Q_h$ it holds that

$$
\left\langle \mathscr{C}_{h1} q_h, v_h \right\rangle = \left\langle \mathscr{B}_h v_h, q_h \right\rangle,
$$

i.e., $\mathscr{C}_{h1} = \mathscr{B}_h'$ on Q_h, though $\mathscr{C}_{h1}$ is defined on $L^2(\Omega_h)$.
(ii) In $\mathscr{A}_h^n$ ($n \geq 2$), we need u^{n-1} and p^{n-1} to get u^n and p^n. If $\mathscr{A}_{h2}$ were used when $n = 1$, we would need p^0, which is not given as the initial condition in the Navier-Stokes equations. This is the reason why we use $\mathscr{A}_{h1}$ at $n = 1$. In the case of the convection-diffusion equation, such fact does not occur.

Since the scheme is nonlinear in u_h^n for $n \geq 2$, we prepare an *internal iteration procedure*. Let $\{(w_h^k, r_h^k)\}_{k=1}^{\infty} \subset V_h \times Q_h$ be the solution of

$$
\begin{cases}
\mathscr{A}_{h2}(w_h^k, w_h^{k-1}, u_h^{n-1}, r_h^k, p_h^{n-1}) = \mathscr{F}_{h2}(f_h^n, f_h^{n-1}, u_h^{n-1}) & \text{in } V_h', \\
\mathscr{B}_h w_h^k = 0 & \text{in } Q_h', \\
w_h^0 = u_h^{n-1}.
\end{cases}
\tag{2.4}
$$

(u_h^n, p_h^n) is obtained as the limit of the sequence $\{(w_h^k, r_h^k)\}_{k=1}^{\infty}$. In the real computation if the convergence criterion,

$$
\frac{\|w_h^k - w_h^{k-1}\|_{H^1(\Omega_h)^d} + \|r_h^k - r_h^{k-1}\|_{L^2(\Omega_h)}}{\|w_h^k\|_{H^1(\Omega_h)^d} + \|r_h^k\|_{L^2(\Omega_h)}} < \varepsilon_I
\tag{2.5}
$$

is satisfied for some k, we set $(u_h^n, p_h^n) \equiv (w_h^k, r_h^k)$. Here ε_I is a sufficiently small positive constant. We note that (2.4) is a linear problem in w_h^k and r_h^k whose matrix is symmetric.

Remark 2.2 One can choose other finite element spaces $V_h \times Q_h$ satisfying the inf-sup condition [6], [10] and $Q_h \subset H^1(\Omega_h)$.

Remark 2.3 Scheme (2.3) requires that Q_h is a subset of $H^1(\Omega_h)$, because the pressure term is written in a strong form. Using a weak form for the pressure, which requires only $Q_h \subset L^2(\Omega_h)$, we can derive a scheme,

$$
\begin{cases}
\tilde{\mathscr{A}}_h^n(u_h, p_h) = \mathscr{F}_h^n(f_h, u_h) & \text{in } V_h', \\
\mathscr{B}_h^n u_h = 0 & \text{in } Q_h', \\
u_h^0 = \Pi_h^{(2)} u^0,
\end{cases}
\tag{2.6}
$$

where

$$
\tilde{\mathscr{A}}_h^n(u, p) \equiv
\begin{cases}
\mathscr{M}_{h2}(u^n, u^n, u^{n-1}; \Delta t) + \mathscr{D}_{h2}(u^n, u^{n-1}) + \tilde{\mathscr{C}}_{h2}(u^{n-1}, p^n, p^{n-1}) & (n \geq 2), \\
\mathscr{M}_{h1}(u^1, u^0; \Delta t_0) + \mathscr{D}_{h1} u^1 + \mathscr{C}_{h1} p^1 & (n = 1),
\end{cases}
$$

$$\left\langle \tilde{\mathscr{C}}_{h2}(w,p,q), v_h \right\rangle \equiv -\frac{1}{2}\left(\nabla \cdot v_h, \ p + q \circ X_1(w, \Delta t)\right) - \frac{\Delta t}{2}\left(q w_{i,j}, \ v_{hj,i}\right). \tag{2.7}$$

The last term of (2.7) is a correction term for second order accuracy in Δt. This scheme is proved to be of second order in Δt in a similar way to scheme (2.3) by using the analysis in the next section. Numerical experiments, however, show that scheme (2.6) is not so stable. In fact, we could not get solutions for $v \leq 10^{-2}$ in Example 1 of Section 4 because of oscillation. Hence we do not use this scheme.

3 Consistency of the Scheme

In this section we assume $\Omega_h = \Omega$ for the sake of simplicity. For an integer n $(2 \leq n \leq N_T)$, we set

$$t^{n-1/2} \equiv \frac{1}{2}(t^n + t^{n-1}).$$

For a function ψ on $\Omega \times (0,T)$ and $m \in \mathbb{N} \cup \{\mathbb{N} - 1/2\} \cup \{0\}$ $(m \leq N_T)$, ψ^m means

$$\psi^m \equiv \psi(\cdot, t^m).$$

Proposition 3.1 (consistency) *Suppose that f is a sufficiently smooth function, (u, p) is the sufficiently smooth solution of (2.1) and $X_1(u^{n-1}, \Delta t)(\Omega)$ and $X_2(u^n, u^{n-1}, \Delta t)(\Omega) \subset \Omega$. Then for any $v_h \in V_h$ it holds that*

$$\left\langle \mathscr{A}_{h2}(u^n, u^n, u^{n-1}, p^n, p^{n-1}) - \mathscr{F}_{h2}(f^n, f^{n-1}, u^{n-1}), \ v_h \right\rangle = O(\Delta t^2)\|v_h\|, \tag{3.1a}$$

$$\left\langle \mathscr{A}_{h1}(u^1, u^0, p^1) - \mathscr{F}_{h1}f^1, \ v_h \right\rangle = O(\Delta t_0)\|v_h\|. \tag{3.1b}$$

$\square$

We prepare some lemmas for the proof. The first one is trivial, but it is often used.

Lemma 3.1 *For a smooth function f it holds that*

$$\frac{1}{2}\left(f(t) + f(t - \Delta t)\right) = f(t - \frac{\Delta t}{2}) + O(\Delta t^2), \tag{3.2a}$$

$$\frac{f(t) - f(t - \Delta t)}{\Delta t} = f'(t - \frac{\Delta t}{2}) + O(\Delta t^2). \tag{3.2b}$$

$\square$

Let $u : \Omega \times (0,T) \to \mathbb{R}^d$ be a smooth function. For a point $x \in \Omega$, we denote by $X(\ \cdot\ ; x) : (0,T) \to \mathbb{R}^d$ the solution of the ordinary differential equation,

$$\begin{cases} X'(t) = u(X(t), t) & \text{in } (t^{n-1}, t^n), \\ X(t^n) = x. \end{cases} \tag{3.3}$$

We denote the material derivation by

$$\frac{D}{Dt} \equiv \frac{\partial}{\partial t} + u \cdot \nabla.$$

We note that the material derivative of a function $f : \Omega \times (0,T) \to \mathbb{R}$ is written as

$$\frac{Df}{Dt}\left(X(t), t\right) = \frac{d}{dt}f\left(X(t), t\right). \tag{3.4}$$

Setting

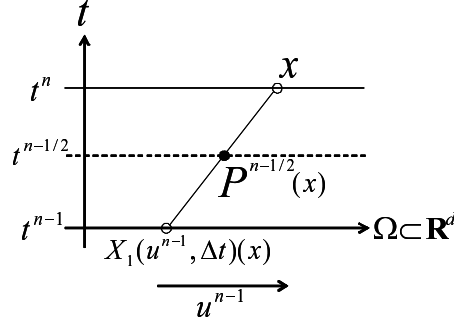$$Y_1(u, \Delta t)(x) \equiv \frac{x + X_1(u, \Delta t)(x)}{2},$$

5

Fig. 1: The evaluation point for the consistency

we evaluate the equations at a point

$$P^{n-1/2}(x) \equiv \left(Y_1(u^{n-1}, \Delta t)(x), \, t^{n-1/2} \right). \tag{3.5}$$

Using the approximation X_2 for $X(t^{n-1})$, we can construct a second order discretization of the material derivative as follows.

Lemma 3.2 *Let u be a sufficiently smooth function and $X_2\left(u^n, u^{n-1}, \Delta t\right)(\Omega) \subset \Omega$. Then it holds that*

$$\frac{u^n(x) - u^{n-1} \circ X_2(u^n, u^{n-1}, \Delta t)(x)}{\Delta t} = \frac{Du}{Dt}\left(P^{n-1/2}(x)\right) + O(\Delta t^2). \tag{3.6}$$

Proof Let X be the solution of (3.3). Substituting u into f in (3.4) and using (3.2b), we have

$$\frac{Du}{Dt}(X(t^{n-1/2}), t^{n-1/2}) = \frac{u^n(X(t^n)) - u^{n-1}(X(t^{n-1}))}{\Delta t} + O(\Delta t^2). \tag{3.7}$$

Since the Heun method is of second order in time increment, we have

$$\begin{aligned}
X(t^{n-1}; x) &= x - \left\{ u^n(x) + u^{n-1}\left(x - u^n(x)\Delta t\right) \right\} \frac{\Delta t}{2} + O(\Delta t^3) \\
&= x - \left\{ u^n(x) + u^{n-1}\left(x - u^{n-1}(x)\Delta t\right) \right\} \frac{\Delta t}{2} + O(\Delta t^3) \\
&= X_2(u^n, u^{n-1}, \Delta t)(x) + O(\Delta t^3).
\end{aligned} \tag{3.8}$$

On the other hand, by (3.2a), it holds that

$$X(t^{n-1/2}; x) = Y_1(u^{n-1}, \Delta t)(x) + O(\Delta t^2). \tag{3.9}$$

Combining (3.8) and (3.9) with (3.7), we get (3.6). $\qquad\square$

Lemma 3.3 *Suppose that u, $f : \Omega \times (0, T) \to \mathbb{R}^d$ and $p : \Omega \times (0, T) \to \mathbb{R}$ are sufficiently smooth functions and $X_1(u^{n-1}, \Delta t)(\Omega)$ and $X_2(u^n, u^{n-1}, \Delta t)(\Omega) \subset \Omega$. Then for any $x \in \Omega$ it holds that*

$$\begin{aligned}
&\frac{u^n - u^{n-1} \circ X_2(u^n, u^{n-1}, \Delta t)}{\Delta t}(x) - \nu \left\{ \nabla D(u^n) + \nabla D(u^{n-1}) \circ X_1(u^{n-1}, \Delta t) \right\}(x) \\
&+ \frac{1}{2} \left\{ \nabla p^n + \nabla p^{n-1} \circ X_1(u^{n-1}, \Delta t) \right\}(x) - \frac{1}{2} \left\{ f^n + f^{n-1} \circ X_1(u^{n-1}, \Delta t) \right\}(x) \\
&= \left(\frac{Du}{Dt} - 2\nu \nabla D(u) + \nabla p - f \right)\left(P^{n-1/2}(x)\right) + O(\Delta t^2),
\end{aligned} \tag{3.10}$$

where $P^{n-1/2}(x)$ is a point defined by (3.5).

6

Proof Let $X(\cdot;x)$ be the solution of (3.3). Substituting $(-2\nu\nabla D(u)+\nabla p-f)(X(\cdot),\cdot)$ into f and t^n into t in (3.2a), using the relation

$$X(t^{n-1};x) = X_1(u^{n-1},\Delta t)(x)+O(\Delta t^2),$$

we have

$$
\begin{aligned}
&-\nu\left\{\nabla D(u^n)+\nabla D(u^{n-1})\circ X_1(u^{n-1},\Delta t)\right\}(x)+\frac{1}{2}\left\{\nabla p^n+\nabla p^{n-1}\circ X_1(u^{n-1},\Delta t)\right\}(x)\\
&\quad-\frac{1}{2}\left\{f^n+f^{n-1}\circ X_1(u^{n-1},\Delta t)\right\}(x)\\
&=\left\{-2\nu\nabla D(u)+\nabla p-f\right\}\left(P^{n-1/2}(x)\right)+O(\Delta t^2).
\end{aligned}
\tag{3.11}
$$

Combining (3.11) with Lemma 3.2, we get the result. $\qquad\square$

Lemma 3.4 *Let* $u:\Omega\to\mathbb{R}^d$ *be a sufficiently smooth function satisfying* $\nabla\cdot u=0$ *in* Ω *and* $X_1(u,\Delta t)(\Omega)\subset \Omega$. *Then for any* $v_h\in V_h$ *it holds that*

$$
\begin{aligned}
&-\left(\nabla D(u)\circ X_1(u,\Delta t),v_h\right)\\
&=\left(D(u)\circ X_1(u,\Delta t),D(v_h)\right)+\Delta t\left(D_{ij}(u)u_{k,j},v_{hi,k}\right)+O(\Delta t^2)\|v_h\|.
\end{aligned}
\tag{3.12}
$$

Proof Since $\nabla\cdot u=0$ in Ω, it holds that

$$
\begin{aligned}
\left(u_{i,j}\circ X_1(u,\Delta t),v_{hi,j}\right) &= -\left(\left(u_{i,j}\circ X_1(u,\Delta t)\right)_{,j},v_{hi}\right)\\
&= -\left(u_{i,jk}\circ X_1(u,\Delta t)(\delta_{kj}-u_{k,j}\Delta t),v_{hi}\right)\\
&= -\left(u_{i,jj}\circ X_1(u,\Delta t),v_{hi}\right)+\Delta t\left(u_{i,jk}\circ X_1(u,\Delta t)u_{k,j},v_{hi}\right)\\
&= -\left(u_{i,jj}\circ X_1(u,\Delta t),v_{hi}\right)+\Delta t\left(u_{i,jk}u_{k,j},v_{hi}\right)+O(\Delta t^2)\|v_h\|\\
&= -\left(u_{i,jj}\circ X_1(u,\Delta t),v_{hi}\right)-\Delta t\left(u_{i,j}u_{k,j},v_{hi,k}\right)+O(\Delta t^2)\|v_h\|,
\end{aligned}
$$

where δ_{kj} is Kronecker's delta. Similarly we have

$$
\begin{aligned}
\left(u_{i,j}\circ X_1(u,\Delta t),v_{hj,i}\right) &= -\left(\left(u_{i,j}\circ X_1(u,\Delta t)\right)_{,i},v_{hj}\right)\\
&= -\left(u_{i,ji}\circ X_1(u,\Delta t),v_{hj}\right)-\Delta t\left(u_{i,j}u_{k,i},v_{hj,k}\right)+O(\Delta t^2)\|v_h\|\\
&= -\left(u_{j,ij}\circ X_1(u,\Delta t),v_{hi}\right)-\Delta t\left(u_{j,i}u_{k,j},v_{hi,k}\right)+O(\Delta t^2)\|v_h\|.
\end{aligned}
$$

Therefore, it holds that

$$
\begin{aligned}
\left(D(u)\circ X_1(u,\Delta t),D(v_h)\right) &= \frac{1}{2}\left\{\left(u_{i,j}\circ X_1(u,\Delta t),v_{hi,j}\right)+\left(u_{i,j}\circ X_1(u,\Delta t),v_{hj,i}\right)\right\}\\
&= -\left(\nabla D(u)\circ X_1(u,\Delta t),v_h\right)-\Delta t\left(D_{ij}(u)u_{k,j},v_{hi,k}\right)+O(\Delta t^2)\|v_h\|,
\end{aligned}
$$

which completes the proof. $\qquad\square$

Proof of Proposition 3.1 Substituting u^{n-1} into u in Lemma 3.4, we have

$$
\begin{aligned}
&-\nu\left(\nabla D(u^{n-1})\circ X_1(u^{n-1},\Delta t),v_h\right)\\
&=\nu\left\{\left(D(u^{n-1})\circ X_1(u^{n-1},\Delta t),D(v_h)\right)+\Delta t\left(D_{ij}(u^{n-1})u_{k,j}^{n-1},v_{hi,k}\right)\right\}+O(\Delta t^2)\|v_h\|.
\end{aligned}
\tag{3.13}
$$

Obviously it holds that

$$-\nu\left(\nabla D(u^n), v_h\right) = \nu\left(D(u^n), D(v_h)\right). \tag{3.14}$$

Combining (3.13) and (3.14) with Lemma 3.3, we have

$$\left\langle \mathscr{A}_{h2}(u^n, u^n, u^{n-1}, p^n, p^{n-1}) - \mathscr{F}_h^n(f, u), v_h \right\rangle$$
$$= \left(\left(\frac{Du}{Dt} - \nabla(2\nu D(u)) + \nabla p - f\right)^{n-1/2} \circ Y_1(u^{n-1}, \Delta t), v_h\right) + O(\Delta t^2)\|v_h\|.$$

Here we have used (3.2b) again. Since (u, p) is the solution of (2.1), we get (3.1a). The proof of (3.1b) is similar. $\qquad\square$

4 Numerical Examples

In this section we show numerical results in $d = 2$ to observe the numerical convergence rate of the scheme. Since the matrix is symmetric, we use the CG method with ILU(0) preconditioner [2] for solving the system of linear equations. In the scheme we have to compute integrals of composite functions such as

$$\int_K u_h^{n-1} \circ X_2(w_h^{k-1}, u_h^{n-1}, \Delta t) v_h \, dx$$

on triangular elements K. The integrand

$$u_h^{n-1} \circ X_2(w_h^{k-1}, u_h^{n-1}, \Delta t) v_h$$

is not smooth on K. It is known that rough numerical integration causes oscillation even in the case that the stability is theoretically proved for a scheme with exact integration, see [21] and [23]. Hence, much attention should be paid to numerical integration of composite functions. Here we use a numerical integration formula of degree five on each triangle [18]. For a given series $\{\psi^n\}_{n=1}^{N_T}$ in a normed space X, we define

$$\|\psi\|_{l^2(X)} \equiv \left\{\sum_{n=1}^{N_T}(t^n - t^{n-1})\|\psi^n\|_X^2\right\}^{\frac{1}{2}}.$$

Example 4.1 In (2.1) we take $\Omega = (0,1)^2$, $T = 1$, and five values of ν,

$$\nu = 1,\ 10^{-1},\ 10^{-2},\ 10^{-3},\ 10^{-4}.$$

The functions f and u^0 are given so that the exact solution is

$$\begin{cases} u_1(x_1, x_2, t) = \{1 + \sin(\pi t)\}\sin^2(\pi x_1)\sin(2\pi x_2), \\ u_2(x_1, x_2, t) = -\{1 + \sin(\pi t)\}\sin^2(\pi x_2)\sin(2\pi x_1), \\ p(x_1, x_2, t) = \{1 + \sin(\pi t)\}\cos(\pi x_1)\cos(\pi x_2). \end{cases}$$

We used FreeFEM [9] for mesh generation. Let N_Ω be the division number of each side of Ω and $h \equiv 1/N_\Omega$ be the representative length of each mesh. Figure 2(left) shows a sample mesh ($N_\Omega = 8$). We solve the problem by the scheme (2.3). Since the convergence rate of the backward Euler scheme of the P2/P1 Galerkin approximation is $O(\Delta t + h^2)$ for the Navier-Stokes equations, e.g., [24], we choose $\Delta t = h$. Furthermore we set $\Delta t_0 = h^2$ and $\varepsilon_I = 10^{-5}$. We calculated Err defined by

$$Err \equiv \frac{\|\Pi_h^{(2)}u - u_h\|_{l^2(H^1(\Omega)^2)} + \|\Pi_h^{(1)}p - p_h\|_{l^2(L^2(\Omega))}}{\|u_h\|_{l^2(H^1(\Omega)^2)} + \|p_h\|_{l^2(L^2(\Omega))}}.$$

Figure 2 (right) shows the graph of Err versus Δt in logarithmic scale for $N_\Omega = 8$, 16, 32 and 64, and the values of Err and the slopes are given in Table 1. We can observe a second order convergence in Δt.
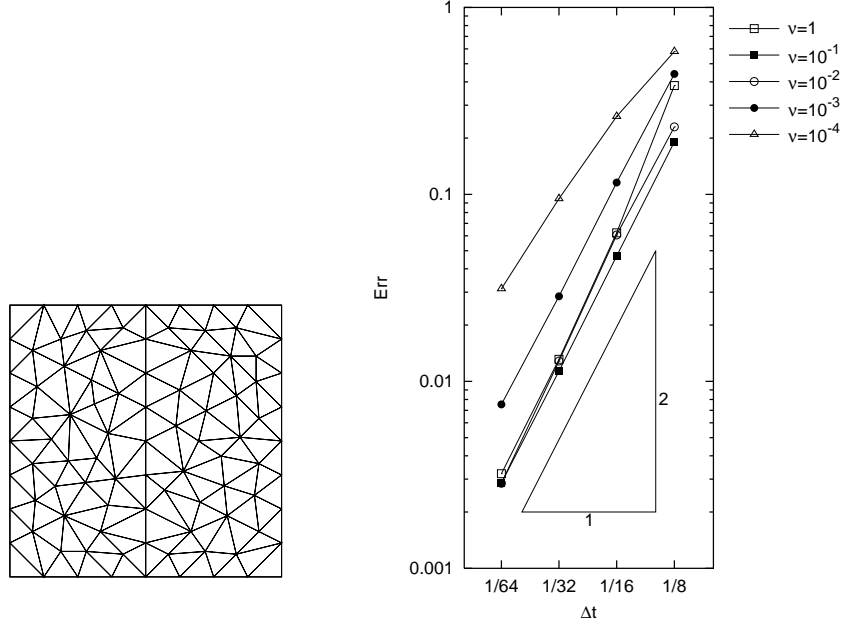
8

Fig. 2: A sample mesh ($N_\Omega = 8$) and the graph of *Err* versus Δt in logarithmic scale
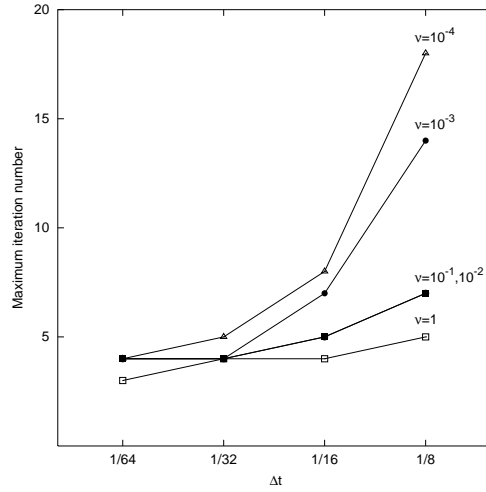

Fig. 3: The graph of maximum iteration number versus Δt for each ν

Figure 3 exhibits the graph of maximum internal iteration number versus Δt. It decreases as Δt becomes small and was equal to 3 or 4 for $\Delta t = 1/64$.

Now we examine the importance of the additional correction term

$$\nu \Delta t \left(D_{ij}(u^{n-1}) u_{k,j}^{n-1}, \; v_{hi,k} \right) \tag{4.1}$$

in the definition of $\mathscr{D}_{h2}$. We compare results obtained by schemes with and without this term as well as the first order scheme. Dropping the term from the scheme (2.3), we get

$$\begin{cases} \hat{\mathscr{A}}_h^n(u_h, p_h) = \mathscr{F}_h^n(f_h, u_h) & \text{in } V_h', \\ \mathscr{B}_h^n u_h = 0 & \text{in } Q_h', \\ u_h^0 = \Pi_h^{(2)} u^0, \end{cases} \tag{4.2}$$

9

where

$$\hat{\mathscr{A}}_h^n(u,p) \equiv \begin{cases} \hat{\mathscr{A}}_{h2}(u^n,u^n,u^{n-1},p^n,p^{n-1}) & (n \geq 2), \\ \mathscr{A}_{h1}(u^1,u^0,p^1) & (n = 1), \end{cases}$$

$$\hat{\mathscr{A}}_{h2}(u,\zeta,w,p,q) \equiv \mathscr{M}_{h2}(u,\zeta,w\;;\Delta t) + \hat{\mathscr{D}}_{h2}(u,w) + \mathscr{C}_{h2}(w,p,q),$$

$$\left\langle \hat{\mathscr{D}}_{h2}(u,w), v_h \right\rangle \equiv \nu\Big(D(u) + D(w) \circ X_1(w,\Delta t),\; D(v_h)\Big).$$

The first order scheme is

$$\begin{cases} \mathscr{A}_{h1}^n(u_h,p_h) = \mathscr{F}_{h1}^n f_h & \text{in } V_h', \\ \mathscr{B}_h^n u_h = 0 & \text{in } Q_h', \\ u_h^0 = \Pi_h^{(2)} u^0, \end{cases} \tag{4.3}$$

where

$$\mathscr{A}_{h1}^n(u,p) \equiv \begin{cases} \mathscr{M}_{h1}(u^n,u^{n-1};\Delta t) + \mathscr{D}_{h1}u^n + \mathscr{C}_{h1}p^n & (n \geq 2), \\ \mathscr{M}_{h1}(u^1,u^0;\Delta t_0) + \mathscr{D}_{h1}u^1 + \mathscr{C}_{h1}p^1 & (n = 1). \end{cases}$$

$$\mathscr{F}_{h1}^n f \equiv \mathscr{F}_{h1}f^n.$$

In the first order scheme we do not need to use a first step with a small time increment Δt_0. For the comparison with other schemes, however, we use the first step with Δt_0. We solve Example 4.1 under the same condition. The results obtained from the three schemes are shown in Figure 4 and Table 1. These results exhibit the necessity of the additional correction term for second order in Δt. In the case of $\nu = 1$ the values of *Err* of the scheme (4.2) are worse than those of the scheme (4.3). In the case of $\nu = 10^{-1}$ the results of (4.2) is better than those of (4.3), but the slope of (4.2) is worse than that of the present scheme (2.3). In the cases $\nu = 10^{-2}, 10^{-3}$ and 10^{-4} there is no clear difference between the results by (4.2) and (2.3). These results are explained from the fact that the additional correction term (4.1) contains ν and is proportional to it.

5   Conclusions

We have presented a new characteristic-curve finite element scheme of single step and second order in Δt for the Navier-Stokes equations. We have shown an additional correction term for the scheme to be of second order in the time increment. Our approximation is based on the Crank-Nicolson method on the trajectory, which is the reason why the correction term is required. Since the scheme is nonlinear, we presented an internal iteration procedure. In each internal iteration the matrix is symmetric and identical. In our numerical examples the internal iteration has converged as few as three or four steps when the time increment is small. We have also given numerical results which confirm the second order accuracy in Δt and the importance of the additional correction term. To make a stable scheme in a weak form of the pressure is an open problem.

References

[1] Baba, K., and Tabata, M. (1981). On a conservative upwind finite element scheme for convective diffusion equations. *RAIRO Anal. Numér.* **15**, 3–25.
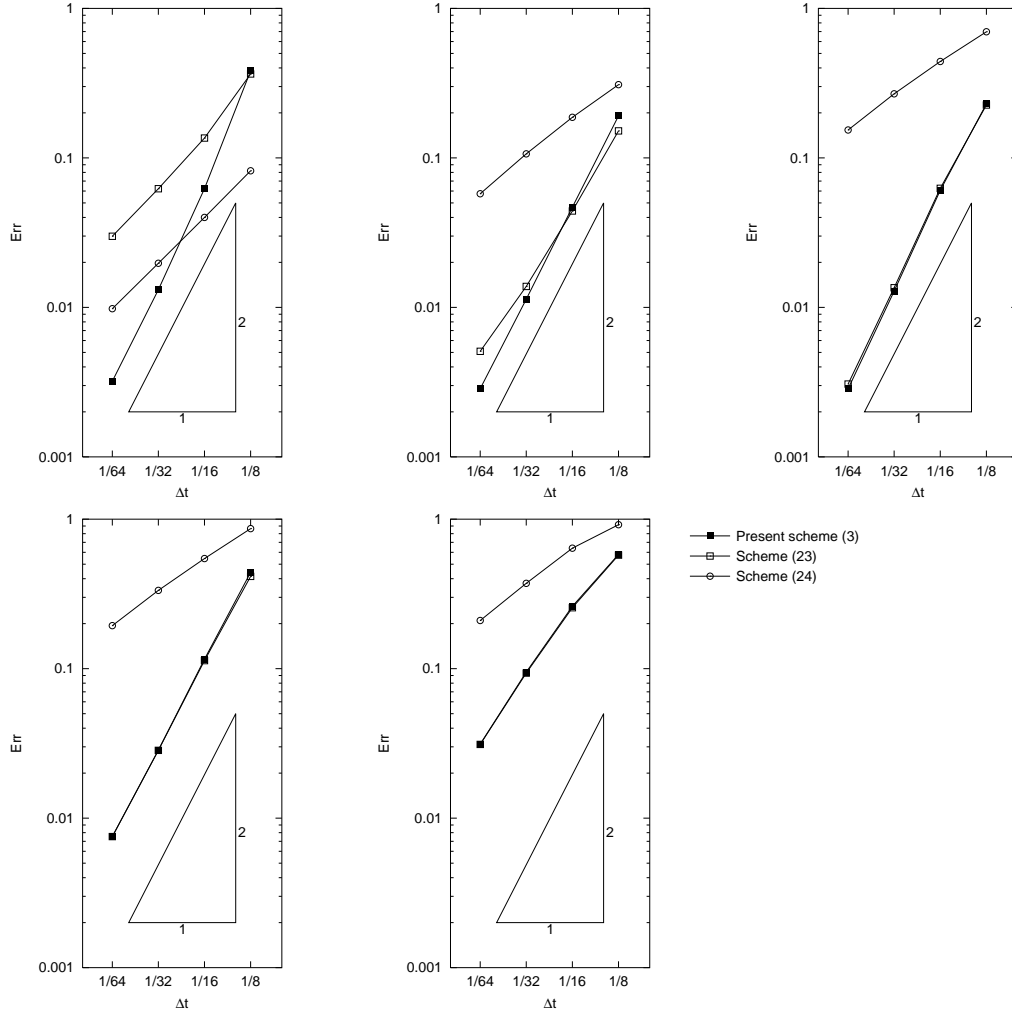
Fig. 4: Comparison of convergence order: $\nu = 1$ (top left), 10^{-1} (top center), 10^{-2} (top right), 10^{-3} (bottom left) and 10^{-4} (bottom right)

[2] Barrett, R., Berry, M., Chan, T. F., Demmel, J., Donato, J., Dongarra, J., Eijkhout, V., Pozo, R., Romine, C., and Van der Vorst, H. (1994). *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*, SIAM.

[3] Bristeau, M. O., Glowinski, R., Mantel,B., Periaux, J., Perrier, P. and Pironneau, O. (1980). A finite element approximation of Navier-Stokes equations for incompressible viscous fluids. Iterative methods of solution. In R. Rautmann, editor, *Approximation Methods for Navier-Stokes Problems*, **771**, *Lecture Notes in Mathematics*, 78–128. Springer, Berlin.

[4] Brooks, A. N., and Hughes, T. J. R. (1982). Streamline upwind/Petrov-Galerkin formulations for convection dominated flows with particular emphasis on the incompressible Navier-Stokes equations. *Comput. Methods. Appl. Mech. Engrg.* **32**, 199–259.

[5] Boukir, K., Maday, Y., Metivet, B., and Razafindrakoto, E. (1997). A high-order characteristic/finite element method for the incompressible Navier-Stokes equations. *Int. J. Numer. Methods Fluids* **25**, 1421–1454.

[6] Brezzi, F. and Fortin, M. (1982). *Mixed and Hybrid Finite Element Methods*. Springer, New York, 1991.

Table 1: Values of *Err* and slopes of the graphs in Figures 2 and 4

	N_Ω	Present scheme (2.3)		Scheme (4.2)		Scheme (4.3)	
		Err	slope	*Err*	slope	*Err*	slope
$v = 1$:	8	3.82×10^{-1}	—	3.64×10^{-1}	—	8.20×10^{-2}	—
	16	6.23×10^{-2}	2.62	1.36×10^{-1}	1.42	4.00×10^{-2}	1.04
	32	1.31×10^{-2}	2.25	6.22×10^{-2}	1.13	1.97×10^{-2}	1.02
	64	3.21×10^{-3}	2.03	2.99×10^{-2}	1.06	9.80×10^{-3}	1.01
$v = 10^{-1}$:	8	1.91×10^{-1}	—	1.51×10^{-1}	—	3.09×10^{-1}	—
	16	4.68×10^{-2}	2.03	4.41×10^{-2}	1.78	1.87×10^{-1}	0.73
	32	1.13×10^{-2}	2.05	1.38×10^{-2}	1.68	1.06×10^{-1}	0.81
	64	2.86×10^{-3}	1.99	5.08×10^{-3}	1.44	5.76×10^{-2}	0.89
$v = 10^{-2}$:	8	2.30×10^{-1}	—	2.26×10^{-1}	—	6.98×10^{-1}	—
	16	6.07×10^{-2}	1.92	6.26×10^{-2}	1.85	4.41×10^{-1}	0.66
	32	1.28×10^{-2}	2.24	1.35×10^{-2}	2.21	2.68×10^{-1}	0.72
	64	2.85×10^{-3}	2.17	3.07×10^{-3}	2.14	1.54×10^{-1}	0.80
$v = 10^{-3}$:	8	4.41×10^{-1}	—	4.14×10^{-1}	—	8.65×10^{-1}	—
	16	1.16×10^{-1}	1.93	1.13×10^{-1}	1.87	5.45×10^{-1}	0.67
	32	2.85×10^{-2}	2.02	2.84×10^{-2}	2.00	3.34×10^{-1}	0.71
	64	7.53×10^{-3}	1.92	7.53×10^{-3}	1.92	1.94×10^{-1}	0.78
$v = 10^{-4}$:	8	5.81×10^{-1}	—	5.75×10^{-1}	—	9.18×10^{-1}	—
	16	2.61×10^{-1}	1.15	2.56×10^{-1}	1.17	6.39×10^{-1}	0.52
	32	9.48×10^{-2}	1.46	9.35×10^{-2}	1.45	3.72×10^{-1}	0.78
	64	3.13×10^{-2}	1.60	3.11×10^{-2}	1.59	2.10×10^{-1}	0.83

[7] Douglas Jr., J., and Russell, T. F. (1982). Numerical methods for convection-dominated diffusion problems based on combining the method of characteristic with finite element or finite difference procedures. *SIAM J. Numer. Math.* **38**, 309–332.

[8] Franca, L. P. and Frey, S. L. (1992). Stabilized finite element methods: II. The incompressible Navier-Stokes equations. *Computer Methods in Applied Mechanics and Engineering*, **99**, 209–233.

[9] FreeFem, http://www.freefem.org/.

[10] Girault, V., and Raviart, P. A. (1986). *Finite Element Methods for Navier-Stokes Equations*, Springer Verlag, Berlin-Heidelberg.

[11] Hughes, T. J. R., Franca, L. P., and Hulbert, G. M. (1989). A new finite element formulation for computational fluid dynamics: VIII. The Galerkin/least-squares method for advective-diffusive equations. *Comput. Methods. Appl. Mech. Engrg.* **73**, 173–189.

[12] Hansbo, P., and Johnson, C. (1990). Adaptive streamline diffusion methods for compressible flow using conservation variables. *Comput. Methods. Appl. Mech. Engrg.* **87**, 267–280.

[13] Johnson, C. (1987). *Numerical Solution of Partial Differential Equations by the Finite Element Method.* Cambridge Univ. Press, Cambridge.

[14] Pironneau, O. (1982). On the transport-diffusion algorithm and its application to the Navier-Stokes equations. *Numer. Math.* **38**, 309–332.

[15] Pironneau, O. (1989). *Finite Element Methods for Fluids*, John Wiley & Sons, Chichester.

[16] Pironneau, O., Liou, J. and Tezduyar, T. (1992). Characteristic-Galerkin and Galerkin/least-squares space-time formulations for the advection-diffusion equation with time-dependent domains. *Computer Methods in Applied Mechanics and Engineering*, **100**, 117–141.

[17] Rui, H., and Tabata, M. (2002). A second order characteristic finite element scheme for convection-diffusion problems. *Numer. Math.* **92**, 161–177.

[18] Stroud, A. H. (1971). *Approximate calculation of multiple integrals*, Prentice-Hall.

[19] Süli, E. (1988). Convergence and nonlinear stability of the Lagrange-Galerkin method for the Navier-Stokes equations. *Numer. Math.* **53**, 459–483.

[20] Tabata, M. (1977). A finite element approximation corresponding to the upwind differencing. *Mem. Numer. Math.* **4**, 47–63.

[21] Tabata, M. (2007). Discrepancy between theory and real computation on the stability of some finite element schemes. *J. Comput. App. Math.* **199**, 424–431.

[22] Tabata, M. and Fujima, S. (1991). Finite-element analysis of high Reynolds number flows past a circular cylinder. *Journal of Computational and Applied Mathematics*, **38**, 411–424.

[23] Tabata, M., and Fujima, S. (2006). Robustness of a characteristic finite element scheme of second order in time increment. In Groth, C., and Zingg, D.W. (eds.), *Proc. Third International Conference on Computational Fluid Dynamics*, Springer Verlag, Berlin-Heidelberg, pp. 177–182.

[24] Tabata, M and Tagami, D. (2000). Error estimates for finite element approximations of drag and lift in nonstationary Navier-Stokes flows. *Japan Journal of Industrial and Applied Mathematics*, Vol. 17, pp. 371–389.

[25] Thomasset, F. (1981). *Implementation of Finite Element Methods for Navier-Stokes Equations*. Springer, New York.

List of MHF Preprint Series, Kyushu University

21st Century COE Program
Development of Dynamic Mathematics with High Functionality

MHF2005-1 Hideki KOSAKI
Matrix trace inequalities related to uncertainty principle

MHF2005-2 Masahisa TABATA
Discrepancy between theory and real computation on the stability of some finite element schemes

MHF2005-3 Yuko ARAKI & Sadanori KONISHI
Functional regression modeling via regularized basis expansions and model selection

MHF2005-4 Yuko ARAKI & Sadanori KONISHI
Functional discriminant analysis via regularized basis expansions

MHF2005-5 Kenji KAJIWARA, Tetsu MASUDA, Masatoshi NOUMI, Yasuhiro OHTA & Yasuhiko YAMADA
Point configurations, Cremona transformations and the elliptic difference Painlevé equations

MHF2005-6 Kenji KAJIWARA, Tetsu MASUDA, Masatoshi NOUMI, Yasuhiro OHTA & Yasuhiko YAMADA
Construction of hypergeometric solutions to the q Painlevé equations

MHF2005-7 Hiroki MASUDA
Simple estimators for non-linear Markovian trend from sampled data:
I. ergodic cases

MHF2005-8 Hiroki MASUDA & Nakahiro YOSHIDA
Edgeworth expansion for a class of Ornstein-Uhlenbeck-based models

MHF2005-9 Masayuki UCHIDA
Approximate martingale estimating functions under small perturbations of dynamical systems

MHF2005-10 Ryo MATSUZAKI & Masayuki UCHIDA
One-step estimators for diffusion processes with small dispersion parameters from discrete observations

MHF2005-11 Junichi MATSUKUBO, Ryo MATSUZAKI & Masayuki UCHIDA
Estimation for a discretely observed small diffusion process with a linear drift

MHF2005-12 Masayuki UCHIDA & Nakahiro YOSHIDA
AIC for ergodic diffusion processes from discrete observations

MHF2005-13 Hiromichi GOTO & Kenji KAJIWARA
Generating function related to the Okamoto polynomials for the Painlevé IV equation

MHF2005-14 Masato KIMURA & Shin-ichi NAGATA
Precise asymptotic behaviour of the first eigenvalue of Sturm-Liouville problems with large drift

MHF2005-15 Daisuke TAGAMI & Masahisa TABATA
Numerical computations of a melting glass convection in the furnace

MHF2005-16 Raimundas VIDŪNAS
Normalized Leonard pairs and Askey-Wilson relations

MHF2005-17 Raimundas VIDŪNAS
Askey-Wilson relations and Leonard pairs

MHF2005-18 Kenji KAJIWARA & Atsushi MUKAIHIRA
Soliton solutions for the non-autonomous discrete-time Toda lattice equation

MHF2005-19 Yuu HARIYA
Construction of Gibbs measures for 1-dimensional continuum fields

MHF2005-20 Yuu HARIYA
Integration by parts formulae for the Wiener measure restricted to subsets in $\mathbb{R}^d$

MHF2005-21 Yuu HARIYA
A time-change approach to Kotani's extension of Yor's formula

MHF2005-22 Tadahisa FUNAKI, Yuu HARIYA & Mark YOR
Wiener integrals for centered powers of Bessel processes, I

MHF2005-23 Masahisa TABATA & Satoshi KAIZU
Finite element schemes for two-fluids flow problems

MHF2005-24 Ken-ichi MARUNO & Yasuhiro OHTA
Determinant form of dark soliton solutions of the discrete nonlinear Schrödinger equation

MHF2005-25 Alexander V. KITAEV & Raimundas VIDŪNAS
Quadratic transformations of the sixth Painlevé equation

MHF2005-26 Toru FUJII & Sadanori KONISHI
Nonlinear regression modeling via regularized wavelets and smoothing parameter selection

MHF2005-27 Shuichi INOKUCHI, Kazumasa HONDA, Hyen Yeal LEE, Tatsuro SATO, Yoshihiro MIZOGUCHI & Yasuo KAWAHARA
On reversible cellular automata with finite cell array

MHF2007-6   Kouji HASHIMOTO
A preconditioned method for saddle point problems

MHF2007-7   Christopher MALON, Seiichi UCHIDA & Masakazu SUZUKI
Mathematical symbol recognition with support vector machines

MHF2007-8   Kenta KOBAYASHI
On the global uniqueness of Stokes' wave of extreme form

MHF2007-9   Kenta KOBAYASHI
A constructive a priori error estimation for finite element discretizations in a non-convex domain using singular functions

MHF2007-10   Myoungnyoun KIM, Mitsuhiro T. NAKAO, Yoshitaka WATANABE & Takaaki NISHIDA
A numerical verification method of bifurcating solutions for 3-dimensional Rayleigh-Bénard problems

MHF2007-11   Yoshiyuki KAGEI
Large time behavior of solutions to the compressible Navier-Stokes equation in an infinite layer

MHF2007-12   Takashi YANAGAWA, Satoshi AOKI and Tetsuji OHYAMA
Human finger vein images are diverse and its patterns are useful for personal identification

MHF2007-13   Masahisa TABATA
Finite element schemes based on energy-stable approximation for two-fluid flow problems with surface tension

MHF2007-14   Mitsuhiro T. NAKAO & Takehiko KINOSHITA
Some remarks on the behaviour of the finite element solution in nonsmooth domains

MHF2007-15   Yoshiyuki KAGEI & Takumi NUKUMIZU
Asymptotic behavior of solutions to the compressible Navier-Stokes equation in a cylindrical domain

MHF2007-16   Shuichi INOKUCHI, Yoshihiro MIZOGUCHI, Hyen Yeal LEE & Yasuo KAWA-HARA
Periodic behaviors of quantum cellular automata

MHF2007-17   Makoto HIROTA& Yasuhide FUKUMOTO
Energy of hydrodynamic and magnetohydrodynamic waves with point and continuous spectra

MHF2007-18   Mitsunori KAYANO& Sadanori KONISHI
Functional principal component analysis via regularized Gaussian basis expansions and its application to unbalanced data